



2 Profile



► 5

3 Position switches



3A

Position switches for heavy duty applications



FD series

► 11



FP series

► 12



FL series

► 13



FC series

► 14



FR series

► 15



FX series

► 16



FM series

► 17

3B

Position switches for standard applications

3C

Position switches without actuator for heavy duty applications



FD, FL, FC, FP series

► 18

3D

Position switches without actuator for standard applications



FR, FX, FM series

► 18

3E

Position switches for standard applications with reset



FR series

► 19

3F

Switches for special applications



Electronic contact block

► 19



High temperatures

► 19



3G

Modular pre-wired position switches



NA series

► 21



NF series

► 21

3H

Microswitches



MK series

► 23



Series MS
Series MF

► 25




4 Human-machine interface

4A
Foot switches


PA - PX series

▶ 27

4B
Modular foot switches


PC series

▶ 28

4C
Single buttons


E2 PU, E2 PL series

▶ 30

4C
**Dual/triple/
quadruple buttons**

 E2 PD, E2 PT,
E2 PQ series

▶ 30

4D
Selector switches

 E2 SE, E2 SL,
E2 SC series

▶ 31

4E
**Emergency stop
buttons**

 E2 PE
series

▶ 32

4F
Luminous discs

 VE DL
series

▶ 32

4G
Indicator lights


E2 IL, E6 IL series

▶ 33

4H
Joysticks


E2 MA series

▶ 33

4I
**USB sockets
RJ45 sockets**


E2 USB, E2 RJ45 series

▶ 34

4J
Potentiometers


E6 DM series

▶ 34

4K
Buzzers


E6 IS series

▶ 35

4L
**Single contact
blocks**


E2 CP, E2 CF series

▶ 35

4M
**Double contact
blocks**


E2 CP, E2 CF series

▶ 36

4N
LED units


E2 LP, E2 LF series

▶ 36

4O
**Protected contact
blocks**



FR, FX, FK series

▶ 37

4P
Housings


ES, EA series

▶ 37

4Q
Accessories


▶ 42



5 Safety devices

5A Safety switches with separate actuator



For heavy duty applications

► 43



For standard applications

► 43

5B Magnetic safety sensors



SR A - SR B series

► 43

5C RFID safety sensors



ST G - ST H series

► 44



ST D series

► 45

5D Safety switches for hinged doors



Hinge switches

► 46



Stainless steel hinge switches

► 46



Switches for hinges

► 46



Switches with slotted hole lever

► 46

5E Safety switches with separate actuator with lock



FS series

► 47



With manual mechanical delay

► 47



With key release

► 47



FG series

► 48



FY series

► 48



NG RFID series

► 49



NS RFID series

► 50



NX RFID series

► 52


5F Control device units



BN series

► 55

5G P-KUBE safety handles



VF AP series
AP series
AN series

► 57

5H Connection gateway for safety devices



BP series

► 61

5I Passive distribution box



BC series

► 62

5L Safety rope switches



With and without reset for emergency stops or simple stops

► 63



6 Safety modules

6A

For emergency stops and movable guard monitoring



CS AR series

► 64

6B

For emergency stops, monitoring of movable guards, safety mats and safety bumpers with 4-wire technology



CS AR series

► 65

6C

For emergency stops and movable guard monitoring with delayed contacts



CS AT series

► 65

6D

Safety timer modules



CS FS series

► 65

6E

For two-hand controls or synchronism monitoring



CS DM series

► 65

6F

For motor standstill, speed and motor-direction-of-rotation monitoring



CS AM series

► 66

6G

Expansion modules with output contacts



CS ME series

► 66

6H

Multifunction modules



CS MP - CS MF series

► 67-69

7 Accessories



Connectors with cable

► 71



M8 - M12 connectors

► 73



M12 connectors for series connection

► 73



M23 connectors

► 74



Cable glands and adapters

► 74



Door holding magnets

► 75



Coded screw covers for switches and actuators

► 75



Tampering protection for M12 connectors

► 75



LED signalling lights

► 75



Fixing screws

► 76



Lenses for VN NG-AC series buttons

► 76



List of available engravings

► 77

The products shown in the product overview represent only a selection of Pizzato Elettrica's product range. For the full range, please refer to the **general catalogues**.




MORE THAN 400 PROFESSIONALS WITH PASSION

It is people, with their professionalism and dedication that make a great company. This profound conviction has always guided Pizzato Elettrica in their choice of employees and partners.

Today, Giuseppe and Marco Pizzato lead a tireless team providing the fastest and most efficient response to the demands of the market. This team has grown over the last 10 years and has achieved a considerable increase in sales in all the countries where Pizzato Elettrica is present.

The various strategic sectors of the business are headed by professionals with significant experience and expertise. Many of these people have developed over years with the company.

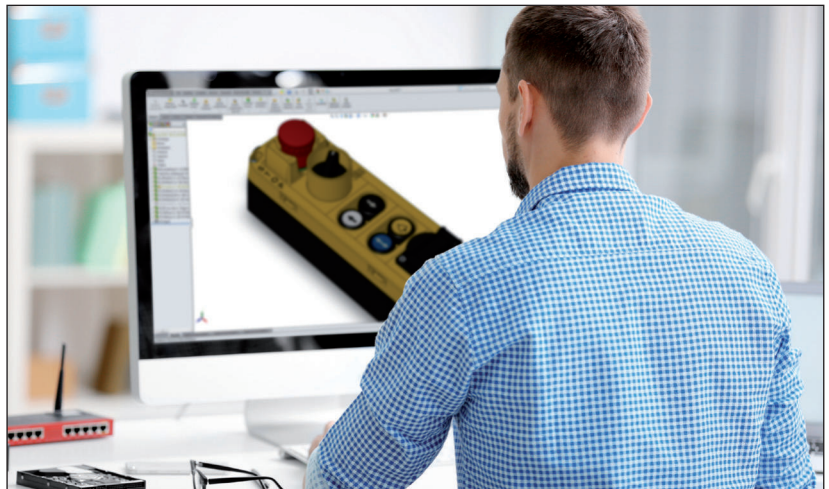

Others are experts in their specific field and have integrated personal experience with the Pizzato Elettrica ethos to extend the company's capability and knowledge.

From the design office to the technical assistance department, from managers to workers, every employee believes in the company and its future. Pizzato Elettrica employees all give the best of themselves secure in the knowledge they are the fundamental elements of a highly valuable enterprise.



PASSION FOR QUALITY

Pizzato Elettrica is one of the leading European manufacturers of position switches, microswitches, safety devices, safety modules, foot switches, control and signalling devices, and devices for lifts. An entrepreneurial company such as Pizzato Elettrica bases its foundations on a solid and widely shared value system. The pillars that form the basis of the company's work have remained constant, and constitute the fundamental guiding principles for all company activities.

PASSION FOR QUALITY


Passion for product quality, orientation towards excellence, innovation, and continuous development, represent the key principles of Pizzato Elettrica's everyday work.

Anyone using Pizzato Elettrica's products does so in the certainty that these devices are of certified quality, since they are the result of a process that is scrupulously controlled at every stage of the production.

The company's goal is to offer the market safe, reliable, and innovative solutions.

CARE FOR THE CUSTOMER

In order to be successful, a product must respond to the specific needs of those who will use it. Market developments must be carefully monitored in order to understand, in advance, which new applications will prove themselves truly useful. This is why Pizzato Elettrica has always cultivated close synergies with the companies that have chosen it as a supplier, using this continuous dialogue to identify the potential developments of the own product range in order to make it highly flexible, complete and capable to respond to the most diverse needs.

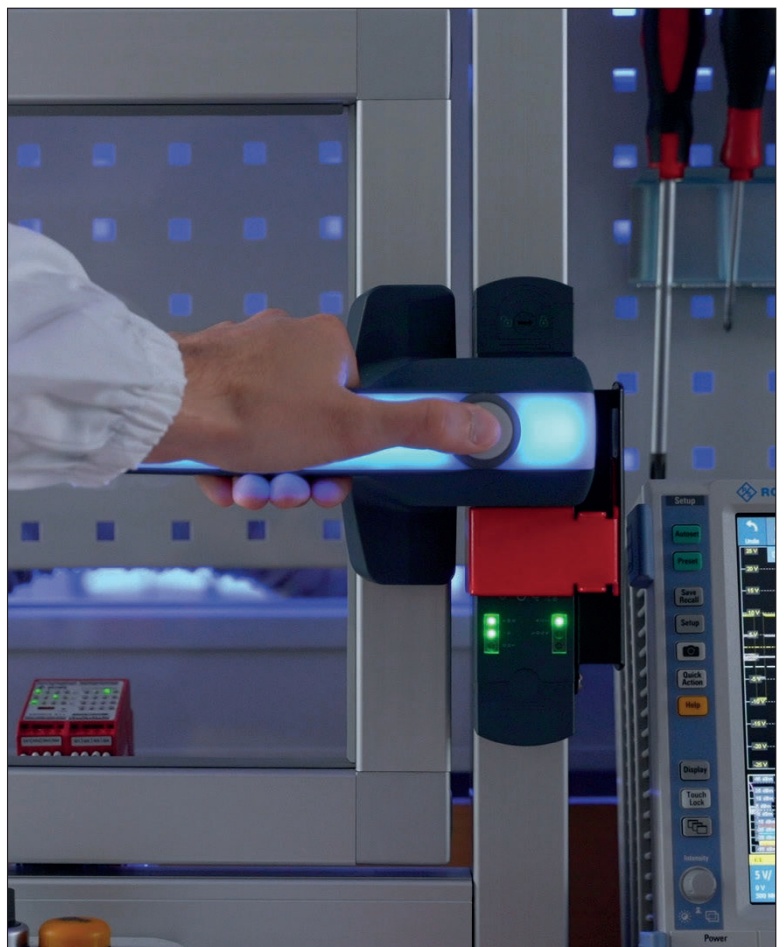



1984: AN ENTREPRENEURIAL STORY BEGINS

- 1984** The company Pizzato di Pizzato B. & C. snc. manufacturer of position switches is founded.
- 1988** The company becomes a limited liability partnership, and is renamed Pizzato Elettrica, a brand shortly destined to become renowned and valued nationwide. The first company-owned plant (P1) geared towards mechanical processing was built.
- 1990** By the end of the decade, thanks to the development of quality products and the experience built on the Italian market, Pizzato Elettrica turns to the international market.
- 1995** Building of the second plant (P3) geared towards the moulding of plastic materials. Development of the position switch range continues in parallel. Start of significant years in terms of safety devices planning. The safety sector becomes a key sector to the company.
- 1998** Construction of the third plant (P4), housing the assembly department.
- 2002** Achievement of the ISO 9001:2000 certification. Launching of the first safety modules. The new factory headquarters and logistics centre (P5) is built and will remain the company's headquarters for many years. Continued expansion of the industrial safety and automation product range.
- 2007** Pizzato Elettrica faces its first generational change: Giuseppe and Marco Pizzato take over the company directorship.
- 2010** Extension of Pizzato Elettrica product portfolio, with the launch of the innovative EROUND line consisting of control and signalling devices. This product range accompanies position switches and safety devices, thus offering complete solutions to customers.
- 2012** Introduction of Gemnis Studio, the first software produced by Pizzato Elettrica. A graphic development environment for the creation, simulation, and debugging of programs that can be integrated in the Gemnis line modules.
- 2013** Foundation of first subsidiary of Pizzato Elettrica, Pizzato Deutschland GmbH, in Germany.
- 2014** A new production facility (P8) dedicated to switches and automatic machines is opened, spanning a surface area of 6000 m².
- 2016** The new NS series of safety switches with electromagnets and RFID technology is introduced, fruit of the company's experience, spanning more than thirty years in the field of industrial safety. To date it is the state of the art in its industry.
- 2017** The company continues to expand and achieves the quality certification based on the more recent version of standard ISO 9001 of 2015. In Spain, the third Pizzato Elettrica subsidiary is founded: Pizzato Iberica SL. The foundation stone is laid for the new factory (P6), which is to become the company's headquarters.
- 2018** The safety handle P-KUBE Krome is launched, a brand new product in the market, confirming that Pizzato Elettrica thrives on innovation in the sectors of automation and industrial safety. Foundation of fourth subsidiary of Pizzato Elettrica, Pizzato USA Inc, in the United States.
- 2019** The new factory (P6) is opened, a modern building of 28,000 m² realized with the most advanced Industry 4.0 technologies, where all offices and production divisions are transferred, allowing to further improve the flow of material and information. The logistics and shipment department is optimised with the introduction of a new completely automated warehouse.
- 2021** Pizzato Elettrica India Ltd. and Pizzato Korea Ltd., commercial branches of Pizzato Elettrica, are established in India and South Korea, respectively.
- 2022** Foundation of Pizzato Academy, Pizzato Elettrica's new training site for getting better acquainted with our products and following the constant regulatory developments in the sector.
- 2023** Pizzato Shanghai Trading Co. Ltd. is founded, as the seventh subsidiary of Pizzato Elettrica, based in China. Pizzato Academy training adds classroom courses focused on Gemnis Studio software to its existing webinars. The SPS – Smart Production Solutions trade fair in Nuremberg is the launchpad for the revolutionary NX series of RFID safety locking switches, the smallest in the world.
- 2024** Pizzato UK Ltd. is established in the United Kingdom, as the eighth branch of Pizzato Elettrica.
- Today,** Giuseppe and Marco Pizzato lead a company in constant growth in terms of new product launches, number of employees, turnover, and new markets. Pizzato Elettrica is continuing its new product internationalisation and development process.



MORE THAN 100 MILLION PARTS SOLD WORLDWIDE

Pizzato Elettrica's product catalogue contains more than 10,000 articles, with more than 1,500 special codes developed for devices personalised according to clients' specific needs. Pizzato Elettrica devices can be grouped, according to typology, into three main macro-categories.

POSITION SWITCHES

Pizzato Elettrica position switches are daily installed in every type of industrial machinery all over the world for applications in the sector of wood, metal, plastic, automotive, packaging, lifting, medicinal, naval, etc.

In order to be used in a such wide variety of sectors and countries, Pizzato Elettrica position switches are made to be assembled in a lot of configurations thanks to the various body shapes, dozens of contact blocks, hundreds of actuators and materials, forces, assembling versions.

Pizzato Elettrica can offer one of the widest product range of position switches in the world. Moreover, the use of high quality materials, high reliability technologies (e.g. twin bridge contact blocks) as well as the IP67 protection degree make this range of position switches one of the most technologically evolved.

SAFETY DEVICES

The company Pizzato Elettrica has been one of the first Italian companies developing dedicated items for this sector, creating and patenting dozens of innovative products, thus becoming one of the main European manufacturers of safety devices.

The wide range of specific products for the safety of machinery, entirely designed and assembled in the company's Marostica (VI) premises, includes the more traditional safety switches with separate actuator (with or without locking mechanism) and hinge switches, but also the state-of-the-art devices with anti-tamper RFID technology such as the ST series sensors and the NG, NS and NX series locking devices.

The product range is completed by safety handles for guards, including the innovative P-KUBE Krome model, featuring an illuminated grip with multicolour signalling LED. It also includes the CS series safety modules, available in single-function version or user-programmable via the Gemnis Studio software — fully developed by Pizzato Elettrica and distributed under a free licence — along with the BC series passive distribution box and the P-Connect connection gateway. The range of ES series housings with control devices now includes new ES series housings with illuminated

guard and buzzer, while the control device units of the BN series are now available also with IO-Link technology.

MAN-MACHINE INTERFACE

Pizzato Elettrica's control and signalling devices of the EROUND line are designed for the use in the human-machine interface sector. Thanks to the elegant design, the care for details and the elegance of the product combined with its maximum safety and reliability, this series is one of the most complete and cutting-edge on the market.

In order to satisfy its customers' needs and requests, Pizzato Elettrica offers a lot of accessories purposely designed to complement its wide range of products and for the installation of these devices on machinery.





MILLIONS OF CERTIFIED PRODUCT CODES

A simple brand isn't enough: the company is aiming for the Pizzato Elettrica brand to be widely recognised as a synonym for absolute quality and certainty.

A result that has been reached and consolidated over the years, updating and expanding the series of certifications obtained from the most important Italian and international control organisations. Product quality is verified by certification bodies issuing a range of quality marks: IMQ, UL, CCC, TÜV SÜD, EAC. These bodies lay out high technical and qualitative standards for the company to achieve and maintain, verified yearly with several inspections: these are performed, without prior notice, by qualified inspectors, who extract samples of products and materials destined for sale from plants, or from the market directly, to subject them to apposite tests.

- **CE MARK.** All Pizzato Elettrica products bear the CE marking in conformity with the European Directives in force.
- **UKCA MARK.** All Pizzato Elettrica products bear the UKCA marking in conformity with the United Kingdom directives in force.
- **ISO 9001 CERTIFICATION.** The company's production system is compliant with the international ISO 9001 standard, in its most recent 2015 revision. The certification covers all of the compa-

ny's plants and their production and managerial activities: entry checks, technical, purchasing and commercial department activities, manufacturing operations assessments, final pre-shipping product tests and checks, equipment reviews and the management of the metrological lab.

The Pizzato Elettrica quality management system ensures that all sensitive company processes – from component design to implementation, from materials provisioning to verification of non-compliant products – are carried out according to the procedures laid down, with the aim of providing our customers with continuously improved and reliable products.

- **CERTIFICATION OF COMPANY QUALITY SYSTEMS.** Pizzato Elettrica has obtained the certificate of compliance with the UNI EN ISO 9000 regulations in force in Italy and abroad. It is issued by a recognised independent body that guarantees the quality and reliability of the service offered to clients worldwide.
- **CSQ, CISQ AND IQNET.** The CSQ system is part of the CISQ (Italian Certification of Quality Systems) federation, which consists of the primary certification bodies operating in Italy in the various product sectors. CISQ is the Italian representative body within IQNet, the biggest international Quality Systems and Company Management certification network, which is adhered to by 25 certification organs in as many countries.





GLOBAL SUBSIDIARIES

Pizzato Deutschland GmbH
Munich
Founding year: 2013
info@pizzato.com

Pizzato Elettrica India Ltd.
Pune
Founding year: 2021
info@pizzato.com

Pizzato France Sarl
Villeurbanne - Lyon
Founding year: 2016
info@pizzato.com

Pizzato Korea Ltd.
Seoul
Founding year: 2021
info@pizzato.com

Pizzato Iberica SL
Barcelona
Founding year: 2017
info@pizzato.com

Pizzato Shanghai Trading Co. Ltd.
Shanghai
Founding year: 2023
info@pizzato.com

Pizzato USA
East Syracuse, NY
Founding year: 2018
info@pizzatousa.com

Pizzato UK Ltd.
London
Founding year: 2024
info@pizzato.com

The purpose of these subsidiaries is to coordinate and support the activities of representative agencies, or distributors, present in the various countries, managing marketing and sales activities, with further objectives of increasing brand visibility and penetration capacity of Pizzato Elettrica products in markets considered strategic.

Products from Pizzato Elettrica are currently used in over 80 countries: The commercial support network, which is made up of local professional and experienced representatives, combined with the productive capacity of the headquarters in Italy, are the basis for the formation of a group that, together with its partners, has all the necessary requirements to become one of the most important companies in the field of automation and industrial safety.



TECHNICAL AND SALES ASSISTANCE



TECHNICAL DEPARTMENT

The Pizzato Elettrica technical department provides direct technical and qualified assistance in Italian and English, helping in this way the customers to choose the suitable product for their own application explaining the characteristics and the correct installation.

Office hours: Monday to Friday
08 am - 12:30 pm / 01:30 pm - 05 pm CET
Telephone: +39.0424.470.930
E-mail: tech@pizzato.com

Spoken languages:  

SALES DEPARTMENT





Among the strengths in the company relationship with the commercial network, the direct assistance guaranteed in five languages: Italian, English, French, German and Spanish. A service that confirms Pizzato Elettrica quality and attention to the needs of customers from around the world.

Office hours: Monday to Friday
08 am - 12:30 pm / 01:30 pm - 05 pm CET
Telephone: +39.0424.470.930
E-mail: info@pizzato.com

Spoken languages:     



FD series

Metal housing
 One M20x1.5 conduit entry
 Protection degree IP67
 Marks:     
 Ambient temperature: -25°C ... +80°C

External gasket

Roller, stainless steel, external gasket

Roller, stainless steel



Snap action contacts 1NO+1NC	FD 501-M2 ⊕	FD 502-M2 ⊕	FD 505-M2 ⊕	FD 510-M2 ⊕	FD 511-M2 ⊕	FD 515-M2 ⊕	FD 516-M2 ⊕
Slow action contacts 1NO+1NC	FD 601-M2 ⊕	FD 602-M2 ⊕	FD 605-M2 ⊕	FD 610-M2 ⊕	FD 611-M2 ⊕	FD 615-M2 ⊕	FD 616-M2 ⊕
Slow action contacts 2NC	FD 901-M2 ⊕	FD 902-M2 ⊕	FD 905-M2 ⊕	FD 910-M2 ⊕	FD 911-M2 ⊕	FD 915-M2 ⊕	FD 916-M2 ⊕
Slow action contacts 1NO+2NC	FD 2001-M2 ⊕	FD 2002-M2 ⊕	FD 2005-M2 ⊕	FD 2010-M2 ⊕	FD 2011-M2 ⊕	FD 2015-M2 ⊕	FD 2016-M2 ⊕
Snap action contacts 2x(1NO-1NC)	FD 201-M2	FD 202-M2	FD 205-M2	FD 210-M2	FD 211-M2	FD 215-M2	FD 216-M2

Spring rod with plastic tip


Spring rod with wire tip

Spring rod

Roller, stainless steel

Adjustable round rod

Adjustable lever

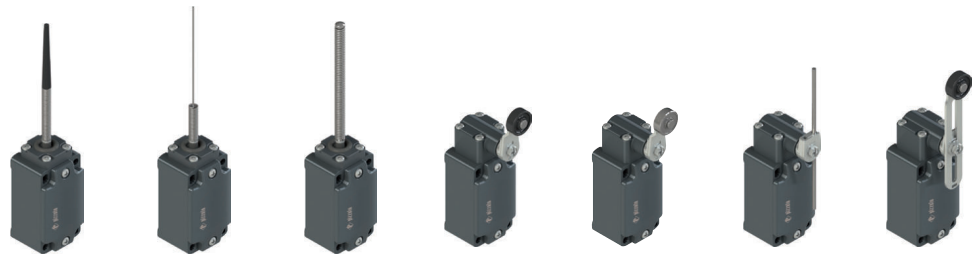

Snap action contacts 1NO+1NC	FD 520-M2	FD 521-M2	FD 525-M2	FD 531-M2 ⊕	FD 531-M2R24 ⊕	FD 532-M2	FD 535-M2
Slow action contacts 1NO+1NC	/	/	/	FD 631-M2 ⊕	FD 631-M2R24 ⊕	FD 632-M2	FD 635-M2
Slow action contacts 2NC	/	/	/	FD 931-M2 ⊕	FD 931-M2R24 ⊕	FD 932-M2	FD 935-M2
Slow action contacts 1NO+2NC	FD 2020-M2	FD 2022-M2	FD 2025-M2	FD 2031-M2 ⊕	FD 2031-M2R24 ⊕	FD 2032-M2	FD 2035-M2
Snap action contacts 2x(1NO-1NC)	FD 220-M2	FD 221-M2	FD 225-M2	FD 231-M2	FD 231-M2R24	FD 232-M2	FD 235-M2


Roller, stainless steel

Glass fibre rod

Bistable

Porcelain roller

Rope switch for signalling

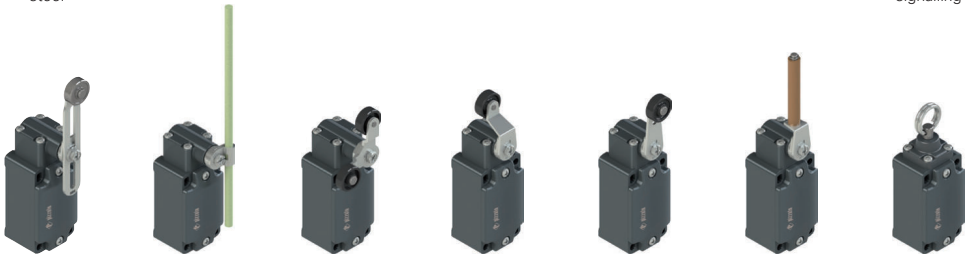

Snap action contacts 1NO+1NC	FD 535-M2R24	FD 536-M2	FD 542-M2 ⊕	FD 551-M2 ⊕	FD 552-M2 ⊕	FD 553-E11M2V9 ⊕	FD 576-M2
Slow action contacts 1NO+1NC	FD 635-M2R24	FD 636-M2	/	FD 651-M2 ⊕	FD 652-M2 ⊕	FD 653-E11M2V9 ⊕	FD 676-M2
Slow action contacts 2NC	FD 935-M2R24	FD 936-M2	/	FD 951-M2 ⊕	FD 952-M2 ⊕	FD 953-E11M2V9 ⊕	FD 976-M2
Slow action contacts 1NO+2NC	FD 2035-M2R24	FD 2036-M2	/	FD 2051-M2 ⊕	FD 2052-M2 ⊕	FD 2053-E11M2V9 ⊕	FD 2076-M2
Snap action contacts 2x(1NO-1NC)	FD 235-M2R24	FD 236-M2	/	FD 251-M2	FD 252-M2	FD 253-E11M2	FD 276-M2

Accessories

See page 71.
 For a complete list of accessories, see the general catalogues.





FP series

Technopolymer housing

One M20x1.5 conduit entry

Protection degree IP67

Marks:

Ambient temperature: -25°C ... +80°C

External gasket

Roller, stainless steel, external gasket

Roller, stainless steel



Snap action contacts 1NO+1NC	FP 501-M2	FP 502-M2	FP 505-M2	FP 510-M2	FP 511-M2	FP 515-M2	FP 516-M2
Slow action contacts 1NO+1NC	FP 601-M2	FP 602-M2	FP 605-M2	FP 610-M2	FP 611-M2	FP 615-M2	FP 616-M2
Slow action contacts 2NC	FP 901-M2	FP 902-M2	FP 905-M2	FP 910-M2	FP 911-M2	FP 915-M2	FP 916-M2
Slow action contacts 1NO+2NC	FP 2001-M2	FP 2002-M2	FP 2005-M2	FP 2010-M2	FP 2011-M2	FP 2015-M2	FP 2016-M2
Snap action contacts 2x(1NO-1NC)	FP 201-M2	FP 202-M2	FP 205-M2	FP 210-M2	FP 211-M2	FP 215-M2	FP 216-M2

Spring rod with plastic tip

Spring rod with wire tip

Spring rod

Roller, stainless steel

Adjustable round rod

Adjustable lever



Snap action contacts 1NO+1NC	FP 520-M2	FP 521-M2	FP 525-M2	FP 531-M2	FP 531-M2R24	FP 532-M2	FP 535-M2
Slow action contacts 1NO+1NC	/	/	/	FP 631-M2	FP 631-M2R24	FP 632-M2	FP 635-M2
Slow action contacts 2NC	/	/	/	FP 931-M2	FP 931-M2R24	FP 932-M2	FP 935-M2
Slow action contacts 1NO+2NC	FP 2020-M2	FP 2022-M2	FP 2025-M2	FP 2031-M2	FP 2031-M2R24	FP 2032-M2	FP 2035-M2
Snap action contacts 2x(1NO-1NC)	FP 220-M2	FP 221-M2	FP 225-M2	FP 231-M2	FP 231-M2R24	FP 232-M2	FP 235-M2


Roller, stainless steel

Glass fibre rod

Bistable

Porcelain roller

Rope switch for signalling

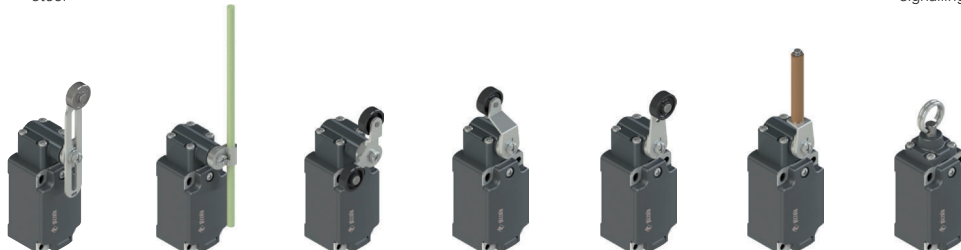

Snap action contacts 1NO+1NC	FP 535-M2R24	FP 536-M2	FP 542-M2	FP 551-M2	FP 552-M2	FP 553-E11M2V9	FP 576-M2
Slow action contacts 1NO+1NC	FP 635-M2R24	FP 636-M2	/	FP 651-M2	FP 652-M2	FP 653-E11M2V9	FP 676-M2
Slow action contacts 2NC	FP 935-M2R24	FP 936-M2	/	FP 951-M2	FP 952-M2	FP 953-E11M2V9	FP 976-M2
Slow action contacts 1NO+2NC	FP 2035-M2R24	FP 2036-M2	/	FP 2051-M2	FP 2052-M2	FP 2053-E11M2V9	FP 2076-M2
Snap action contacts 2x(1NO-1NC)	FP 235-M2R24	FP 236-M2	/	FP 251-M2	FP 252-M2	FP 253-E11M2	FP 276-M2

Position switches with swivelling lever without actuator, see page 18

FL series

Metal housing
 Three M20x1.5 conduit entries
 Protection degree IP67
 Marks:
 Ambient temperature: -25°C ... +80°C

External gasket

Roller, stainless steel, external gasket

Roller, stainless steel



Snap action contacts 1NO+1NC	FL 501-M2	FL 502-M2	FL 505-M2	FL 510-M2	FL 511-M2	FL 515-M2	FL 516-M2
Slow action contacts 1NO+1NC	FL 601-M2	FL 602-M2	FL 605-M2	FL 610-M2	FL 611-M2	FL 615-M2	FL 616-M2
Slow action contacts 2NC	FL 901-M2	FL 902-M2	FL 905-M2	FL 910-M2	FL 911-M2	FL 915-M2	FL 916-M2
Slow action contacts 1NO+2NC	FL 2001-M2	FL 2002-M2	FL 2005-M2	FL 2010-M2	FL 2011-M2	FL 2015-M2	FL 2016-M2
Snap action contacts 2x(1NO-1NC)	FL 201-M2	FL 202-M2	FL 205-M2	FL 210-M2	FL 211-M2	FL 215-M2	FL 216-M2

Spring rod with plastic tip


Spring rod with wire tip

Spring rod

Roller, stainless steel

Adjustable round rod

Adjustable lever

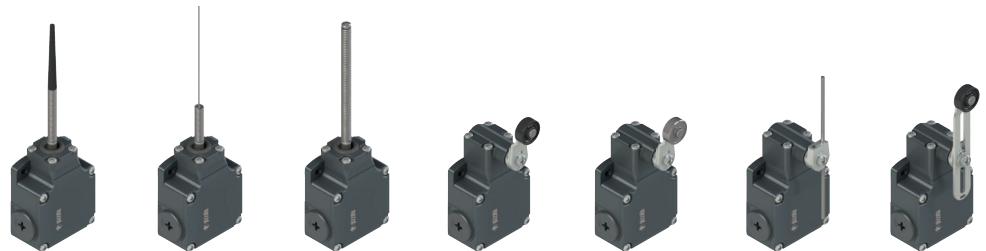

Snap action contacts 1NO+1NC	FL 520-M2	FL 521-M2	FL 525-M2	FL 531-M2	FL 531-M2R24	FL 532-M2	FL 535-M2
Slow action contacts 1NO+1NC	/	/	/	FL 631-M2	FL 631-M2R24	FL 632-M2	FL 635-M2
Slow action contacts 2NC	/	/	/	FL 931-M2	FL 931-M2R24	FL 932-M2	FL 935-M2
Slow action contacts 1NO+2NC	FL 2020-M2	FL 2022-M2	FL 2025-M2	FL 2031-M2	FL 2031-M2R24	FL 2032-M2	FL 2035-M2
Snap action contacts 2x(1NO-1NC)	FL 220-M2	FL 221-M2	FL 225-M2	FL 231-M2	FL 231-M2R24	FL 232-M2	FL 235-M2


Roller, stainless steel

Glass fibre rod

Bistable

Porcelain roller

Rope switch for signalling

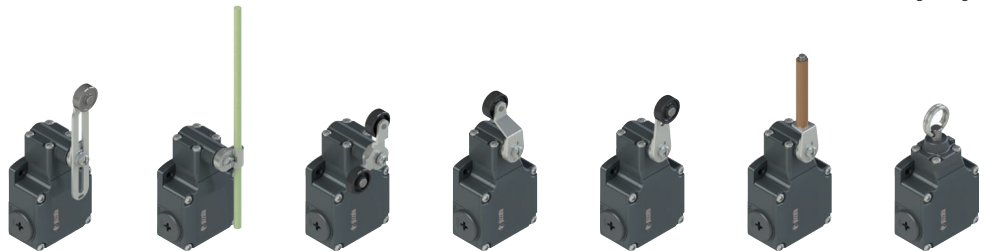

Snap action contacts 1NO+1NC	FL 535-M2R24	FL 536-M2	FL 542-M2	FL 551-M2	FL 552-M2	FL 553-E11M2V9	FL 576-M2
Slow action contacts 1NO+1NC	FL 635-M2R24	FL 636-M2	/	FL 651-M2	FL 652-M2	FL 653-E11M2V9	FL 676-M2
Slow action contacts 2NC	FL 935-M2R24	FL 936-M2	/	FL 951-M2	FL 952-M2	FL 953-E11M2V9	FL 976-M2
Slow action contacts 1NO+2NC	FL 2035-M2R24	FL 2036-M2	/	FL 2051-M2	FL 2052-M2	FL 2053-E11M2V9	FL 2076-M2
Snap action contacts 2x(1NO-1NC)	FL 235-M2R24	FL 236-M2	/	FL 251-M2	FL 252-M2	FL 253-E11M2	FL 276-M2

Accessories

See page 71.
 For a complete list of accessories, see the general catalogues.





FC series

Metal housing
 One M20x1.5 conduit entry
 Protection degree IP67
 Marks:
 Ambient temperature: -25°C ... +80°C

External gasket

Roller, stainless steel, external gasket

Roller, stainless steel



Snap action contacts 1NO+1NC	FC 301-M2	FC 302-M2	FC 305-M2	FC 310-M2	FC 311-M2	FC 315-M2	FC 316-M2
Slow action contacts 1NO+1NC	FC 3301-M2	FC 3302-M2	FC 3305-M2	FC 3310-M2	FC 3311-M2	FC 3315-M2	FC 3316-M2
Slow action contacts 2NC	FC 3401-M2	FC 3402-M2	FC 3405-M2	FC 3410-M2	FC 3411-M2	FC 3415-M2	FC 3416-M2

Spring rod with plastic tip


Spring rod with wire tip

Spring rod

Roller, stainless steel

Adjustable round rod

Adjustable lever

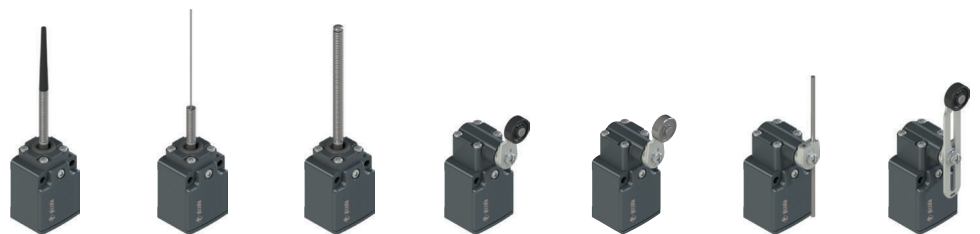


Snap action contacts 1NO+1NC	FC 320-M2	FC 321-M2	FC 325-M2	FC 331-M2	FC 331-M2R24	FC 332-M2	FC 335-M2
Slow action contacts 1NO+1NC	FC 3320-M2	FC 3321-M2	FC 3325-M2	FC 3331-M2	FC 3331-M2R24	FC 3332-M2	FC 3335-M2
Slow action contacts 2NC	FC 3420-M2	FC 3421-M2	FC 3425-M2	FC 3431-M2	FC 3431-M2R24	FC 3432-M2	FC 3435-M2

Roller, stainless steel

Glass fibre rod

Porcelain roller



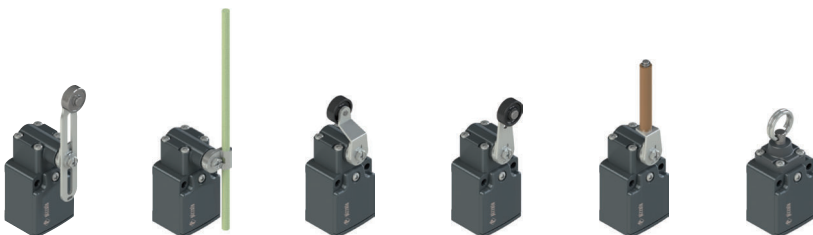




Rope switch for signalling



Snap action contacts 1NO+1NC	FC 335-M2R24	FC 336-M2	FC 351-M2	FC 352-M2	FC 353-E11M2	FC 376-M2
Slow action contacts 1NO+1NC	FC 3335-M2R24	FC 3336-M2	FC 3351-M2	FC 3352-M2	FC 3353-E11M2V9	FC 3376-M2
Slow action contacts 2NC	FC 3435-M2R24	FC 3436-M2	FC 3451-M2	FC 3452-M2	FC 3453-E11M2V9	FC 3476-M2





























Position switches with swivelling lever without actuator, see page 18

FR series

Technopolymer housing 
 One M20x1.5 conduit entry
 Protection degree IP67, up to IP69K
 (depending on the model)
 Marks:      
 Ambient temperature: -25°C ... +80°C













External gasket Roller Ø 12 mm, stainless steel Plastic roller



Snap action contacts 1NO+1NC	FR 501-M2 	FR 502-M2 	FR 505-M2 	FR 507-M2 	FR 508-M2 	FR 513-M2 	FR 515-M2 
Slow action contacts 1NO+1NC	FR 601-M2 	FR 602-M2 	FR 605-M2 	FR 607-M2 	FR 608-M2 	FR 613-M2 	FR 615-M2 
Slow action contacts 2NC	FR 901-M2 	FR 902-M2 	FR 905-M2 	FR 907-M2 	FR 908-M2 	FR 913-M2 	FR 915-M2 
Slow action contacts 1NO+2NC	FR 2001-M2 	FR 2002-M2 	FR 2005-M2 	FR 2007-M2 	FR 2008-M2 	FR 2013-M2 	FR 2015-M2 
Snap action contacts 2x(1NO-1NC)	FR 201-M2	FR 202-M2	FR 205-M2	FR 207-M2	FR 208-M2	FR 213-M2	FR 215-M2

















Metal roller Spring rod with plastic tip Spring rod with wire tip Spring rod Round rod, stainless steel



Snap action contacts 1NO+1NC	FR 515-M2R28 	FR 520-M2	FR 521-M2	FR 525-M2	FR 530-M2 	FR 531-M2 	FR 550-M2
Slow action contacts 1NO+1NC	FR 615-M2R28 	/	/	/	FR 630-M2 	FR 631-M2 	FR 650-M2
Slow action contacts 2NC	FR 915-M2R28 	/	/	/	FR 930-M2 	FR 931-M2 	FR 950-M2
Slow action contacts 1NO+2NC	FR 2015-M2R28 	FR 2020-M2	FR 2022-M2	FR 2025-M2	FR 2030-M2 	FR 2031-M2 	FR 2050-M2
Snap action contacts 2x(1NO-1NC)	FR 215-M2R28	FR 220-M2	FR 221-M2	FR 225-M2	FR 230-M2	FR 231-M2	FR 250-M2

Porcelain roller Adjustable lever Adjustable safety lever Glass fibre rod Rope switch for signalling



Snap action contacts 1NO+1NC	FR 551-M2 	FR 553-E0M2V9 	FR 554-M2 	FR 555-M2	FR 556-M2 	FR 569-M2	FR 576-M2
Slow action contacts 1NO+1NC	FR 651-M2 	FR 653-E0M2V9 	FR 654-M2 	FR 655-M2	FR 656-M2 	FR 669-M2	FR 676-M2
Slow action contacts 2NC	FR 951-M2 	FR 953-E0M2V9 	FR 954-M2 	FR 955-M2	FR 956-M2 	FR 969-M2	FR 976-M2
Slow action contacts 1NO+2NC	FR 2051-M2 	FR 2053-E0M2V9 	FR 2054-M2 	FR 2055-M2	FR 2056-M2 	FR 2069-M2	FR 2076-M2
Snap action contacts 2x(1NO-1NC)	FR 251-M2	FR 253-E0M2	FR 254-M2	FR 255-M2	FR 256-M2	FR 269-M2	FR 276-M2

Accessories
 See page 71.
 For a complete list of accessories, see the general catalogues.





FX series

Technopolymer housing

Two conduit entries M20x1.5

Protection degree IP67, up to IP69K
(depending on the model)

Marks:

Ambient temperature: -25°C ... +80°C

External gasket

Roller Ø 12 mm,
stainless steel

Plastic roller



Snap action contacts 1NO+1NC	FX 501-M2	FX 502-M2	FX 505-M2	FX 507-M2	FX 508-M2	FX 513-M2	FX 515-M2
Slow action contacts 1NO+1NC	FX 601-M2	FX 602-M2	FX 605-M2	FX 607-M2	FX 608-M2	FX 613-M2	FX 615-M2
Slow action contacts 2NC	FX 901-M2	FX 902-M2	FX 905-M2	FX 907-M2	FX 908-M2	FX 913-M2	FX 915-M2
Slow action contacts 1NO+2NC	FX 2001-M2	FX 2002-M2	FX 2005-M2	FX 2007-M2	FX 2008-M2	FX 2013-M2	FX 2015-M2
Snap action contacts 2x(1NO-1NC)	FX 201-M2	FX 202-M2	FX 205-M2	FX 207-M2	FX 208-M2	FX 213-M2	FX 215-M2

Metal roller

Spring rod with
plastic tip

Spring rod with
wire tip

Spring rod

Round rod,
stainless steel



Snap action contacts 1NO+1NC	FX 515-M2R28	FX 520-M2	FX 521-M2	FX 525-M2	FX 530-M2	FX 531-M2	FX 550-M2
Slow action contacts 1NO+1NC	FX 615-M2R28	/	/	/	FX 630-M2	FX 631-M2	FX 650-M2
Slow action contacts 2NC	FX 915-M2R28	/	/	/	FX 930-M2	FX 931-M2	FX 950-M2
Slow action contacts 1NO+2NC	FX 2015-M2R28	FX 2020-M2	FX 2022-M2	FX 2025-M2	FX 2030-M2	FX 2031-M2	FX 2050-M2
Snap action contacts 2x(1NO-1NC)	FX 215-M2R28	FX 220-M2	FX 221-M2	FX 225-M2	FX 230-M2	FX 231-M2	FX 250-M2

Porcelain roller

Adjustable lever

Adjustable safety
lever

Glass fibre rod







Rope switch for
signalling



Snap action contacts 1NO+1NC	FX 551-M2	FX 553-E0M2V9	FX 554-M2	FX 555-M2	FX 556-M2	FX 569-M2	FX 576-M2
Slow action contacts 1NO+1NC	FX 651-M2	FX 653-E0M2V9	FX 654-M2	FX 655-M2	FX 656-M2	FX 669-M2	FX 676-M2
Slow action contacts 2NC	FX 951-M2	FX 953-E0M2V9	FX 954-M2	FX 955-M2	FX 956-M2	FX 969-M2	FX 976-M2
Slow action contacts 1NO+2NC	FX 2051-M2	FX 2053-E0M2V9	FX 2054-M2	FX 2055-M2	FX 2056-M2	FX 2069-M2	FX 2076-M2
Snap action contacts 2x(1NO-1NC)	FX 251-M2	FX 253-E0M2	FX 254-M2	FX 255-M2	FX 256-M2	FX 269-M2	FX 276-M2





























Position switches with swivelling lever without actuator, see page 18

FM series

Metal housing
 One M20x1.5 conduit entry
 Protection degree IP67, up to IP69K
 (depending on the model)
 Marks:      
 Ambient temperature: -25°C ... +80°C













External gasket Roller Ø 12 mm, stainless steel Metal roller




Snap action contacts 1NO+1NC	FM 501-M2 	FM 502-M2 	FM 505-M2 	FM 507-M2 	FM 508-M2 	FM 513-M2 	FM 515-M2R28 
Slow action contacts 1NO+1NC	FM 601-M2 	FM 602-M2 	FM 605-M2 	FM 607-M2 	FM 608-M2 	FM 613-M2 	FM 615-M2R28 
Slow action contacts 2NC	FM 901-M2 	FM 902-M2 	FM 905-M2 	FM 907-M2 	FM 908-M2 	FM 913-M2 	FM 915-M2R28 
Slow action contacts 1NO+2NC	FM 2001-M2 	FM 2002-M2 	FM 2005-M2 	FM 2007-M2 	FM 2008-M2 	FM 2013-M2 	FM 2015-M2R28 
Snap action contacts 2x(1NO-1NC)	FM 201-M2	FM 202-M2	FM 205-M2	FM 207-M2	FM 208-M2	FM 213-M2	FM 215-M2R28













Spring rod with plastic tip Spring rod with wire tip Spring rod Round rod, stainless steel



Snap action contacts 1NO+1NC	FM 520-M2	FM 521-M2	FM 525-M2	FM 530-M2 	FM 531-M2 	FM 550-M2	FM 551-M2 
Slow action contacts 1NO+1NC	/	/	/	FM 630-M2 	FM 631-M2 	FM 650-M2	FM 651-M2 
Slow action contacts 2NC	/	/	/	FM 930-M2 	FM 931-M2 	FM 950-M2	FM 951-M2 
Slow action contacts 1NO+2NC	FM 2020-M2	FM 2022-M2	FM 2025-M2	FM 2030-M2 	FM 2031-M2 	FM 2050-M2	FM 2051-M2 
Snap action contacts 2x(1NO-1NC)	FM 220-M2	FM 221-M2	FM 225-M2	FM 230-M2	FM 231-M2	FM 250-M2	FM 251-M2

Porcelain roller Adjustable lever Adjustable safety lever Glass fibre rod Rope switch for signalling

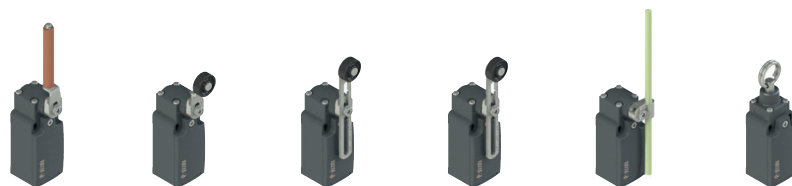

Snap action contacts 1NO+1NC	FM 553-E0M2V9 	FM 554-M2 	FM 555-M2	FM 556-M2 	FM 569-M2	FM 576-M2
Slow action contacts 1NO+1NC	FM 653-E0M2V9 	FM 654-M2 	FM 655-M2	FM 656-M2 	FM 669-M2	FM 676-M2
Slow action contacts 2NC	FM 953-E0M2V9 	FM 954-M2 	FM 955-M2	FM 956-M2 	FM 969-M2	FM 976-M2
Slow action contacts 1NO+2NC	FM 2053-E0M2V9 	FM 2054-M2 	FM 2055-M2	FM 2056-M2 	FM 2069-M2	FM 2076-M2
Snap action contacts 2x(1NO-1NC)	FM 253-E0M2	FM 254-M2	FM 255-M2	FM 256-M2	FM 269-M2	FM 276-M2

Accessories
 See page 71.
 For a complete list of accessories, see the general catalogues.





FD, FL, FC, FP series

Position switches with swivelling lever without actuator

Metal housing (FD, FL, FC)
 Technopolymer housing (FP)
 One M20x1.5 conduit entry (FD, FP, FC)
 Three M20x1.5 conduit entries (FL)
 Protection degree IP67

Marks:



Snap action contacts 1NO+1NC	FD 538-M2	FD 558-M2	FL 538-M2	FL 558-M2	FC 338-M2	FC 358-M2	FP 538-M2	FP 558-M2
Slow action contacts 1NO+1NC	FD 638-M2	FD 658-M2	FL 638-M2	FL 658-M2	FC 3338-M2	FC 3358-M2	FP 638-M2	FP 658-M2
Slow action contacts 2NC	FD 938-M2	FD 958-M2	FL 938-M2	FL 958-M2	FC 3438-M2	FC 3458-M2	FP 938-M2	FP 958-M2
Slow action contacts 1NO+2NC	FD 2038-M2	FD 2058-M2	FL 2038-M2	FL 2058-M2	/	/	FP 2038-M2	FP 2058-M2
Snap action contacts 2x(1NO-1NC)	FD 238-M2	FD 258-M2	FL 238-M2	FL 258-M2	/	/	FP 238-M2	FP 258-M2

Separate actuators

Round rod Square rod



VF L31 VF L32 VF L33 VF L34 VF L35 VF L36 VF L51 VF L52 VF L53 VF L56 VF L57

Attention! These separate actuators can be used only with items of the FD, FL, FC and FP series.

Position switches without actuator for standard applications


FR, FX, FM series

Position switches with swivelling lever without actuator

Metal housing (FM)
 Technopolymer housing (FR, FX)
 One M20x1.5 conduit entry (FR, FM)
 Two M20x1.5 conduit entries (FX)
 Protection degree IP67, up to IP69K
 (depending on the model)

Marks:

With reset




Snap action contacts 1NO+1NC	FR 538-M2	FX 538-M2	FM 538-M2	/
Slow action contacts 1NO+1NC	FR 638-M2	FX 638-M2	FM 638-M2	FR 638-W3M2
Slow action contacts 2NC	FR 938-M2	FX 938-M2	FM 938-M2	FR 938-W3M2
Slow action contacts 1NO+2NC	FR 2038-M2	FX 2038-M2	FM 2038-M2	FR 2038-W3M2
Snap action contacts 2x(1NO-1NC)	FR 238-M2	FX 238-M2	FM 238-M2	FR 238-W3M2

Separate actuators



VN A00KA VN A00KB VN A00KC VN A00KD VN A00KE VN A00KF VN A00KG VN A00KH VN A00KP

Stainless steel rod 3 x 3 x 125 mm, adjustable Stainless steel rod Ø 3 x 125 mm, adjustable Glass fibre rod Ø 6 x 200 mm, adjustable

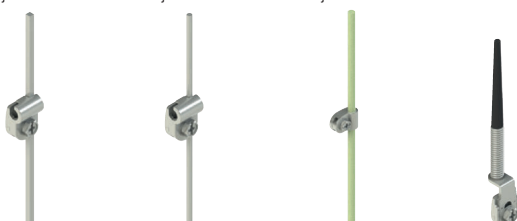

VN A00LB VN A00LE VN A00LH VN A00LL

To check the correspondence with previous lever codes, please consult the table on page 277 of the General Catalogue Detection 2025-2026.
 Example: VF LE30 -> VN A00KA

3E Position switches for standard applications with reset

FR series


Technopolymer housing

One M20x1.5 conduit entry

Protection degree IP67

Marks:

Ambient temperature: -25°C ... +80°C

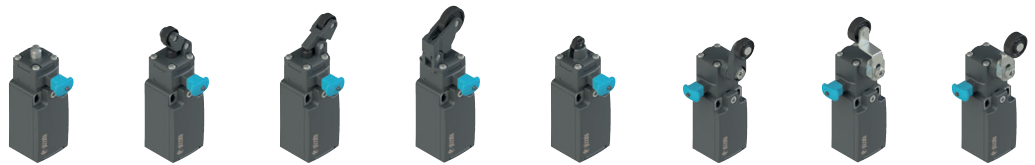

Slow action contacts 1NO+1NC

FR 601-W3M2 FR 602-W3M2 FR 605-W3M2 FR 607-W3M2 FR 615-W3M2 FR 630-W3M2 FR 651-W3M2 FR 654-W3M2

Slow action contacts 2NC

FR 901-W3M2 FR 902-W3M2 FR 905-W3M2 FR 907-W3M2 FR 915-W3M2 FR 930-W3M2 FR 951-W3M2 FR 954-W3M2

Slow action contacts 1NO+2NC

FR 2001-W3M2 FR 2002-W3M2 FR 2005-W3M2 FR 2007-W3M2 FR 2015-W3M2 FR 2030-W3M2 FR 2051-W3M2 FR 2054-W3M2

To order a product of the FX or FM series, replace FR with FX or FM in the codes shown above.

Example: FR 601-W3M2 → FX 601-W3M2

Position switches with swivelling lever without actuator, see page 18



Pizzato Elettrica has developed a reset device code W3 to make perfectly simultaneous the actuator and the contact block tripping. This device is a module that is mounted between the body and the head of the switch that can be rotated independently from the head. The reset device has the following advantages:

- Contact blocks with snap action are no more necessary because the tripping movement is executed by the reset device itself;
- Can be rotated independently from the head ensuring maximum flexibility during installation;
- Can be delivered with two different actuating forces: standard (W3) and increased (W4) for vibration applications;
- Mechanical endurance: 1 million operating cycles.

3F Switches for special applications

FR series

with electronic contact block

Technopolymer housing

One M20x1.5 conduit entry

Protection degree IP67

Marks:


Ambient temperature: -25°C ... +80°C



For separate actuators see page 18

- Rated voltage (Ue): 10 ... 30 Vdc
- Rated current (Ie): 200 mA
- Adjustable switching point
- Bounce-free output signals
- Two static outputs, 1NO and 1NC

- Reduced actuating force
- Signal LEDs for power supply and switching
- Minimum differential travel

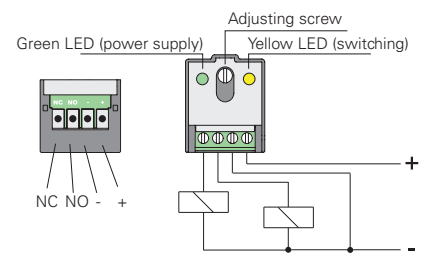

PNP switching outputs (1NO-1NC)

FR E121-M2 FR E155-M2 FR E138-M2

To order a product of the FX or FM series, replace FR with FX or FM in the codes shown above.

Example: FR E121-M2 → FX E121-M2

MK series for high temperatures

Ambient temperature: -25°C ... +120°C


Technopolymer housing

Versions with positive opening

Screw terminals

Protection degree IP40 (electrical contacts)

Marks:

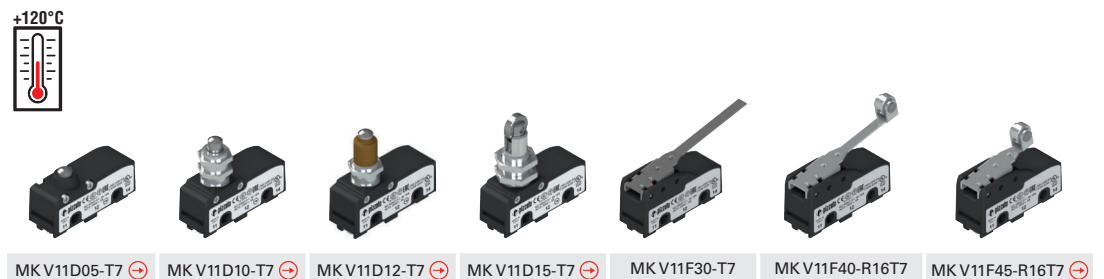

Snap action contacts 1NO+1NC

MK V11D05-T7 MK V11D10-T7 MK V11D12-T7 MK V11D15-T7 MK V11F30-T7 MK V11F40-R16T7 MK V11F45-R16T7

FD series for high temperatures

Ambient temperature: -15°C ... +180°C

Metal housing

One M20x1.5 conduit entry

Protection degree IP67

Marks:



Slow action contacts 1NO+2NC

FD 2011-M2T2 FD 2016-M2T2 FD 2031-M2R24T2 FD 2032-M2T2 FD 2033-M2T2 FD 2056-M2R24T2 FD 2057-M2R24T2

Accessories

See page 71.

For a complete list of accessories, see the general catalogues.



NA series

Metal housing
 Cable length 2 m (other cable lengths available on request)
 Mounting hole spacing 20 mm
 Protection degrees IP67 and IP69K
 Marks:



Snap action contacts 1NO+1NC	NA B110AB-DN2	NA B110BB-DN2	NA B110EB-DN2	NA B110FB-DN2	NA B110HB-DN2	NA B110HE-DN2	NA B112KC-DN2	NA B112KD-DN2
Snap action contacts 1NO+2NC	NA B120AB-DN2	NA B120BB-DN2	NA B120EB-DN2	NA B120FB-DN2	NA B120HB-DN2	NA B120HE-DN2	NA B122KC-DN2	NA B122KD-DN2
Snap action contacts 2NO+2NC	NA B220AB-DN2	NA B220BB-DN2	NA B220EB-DN2	NA B220FB-DN2	NA B220HB-DN2	NA B220HE-DN2	NA B222KC-DN2	NA B222KD-DN2
Slow action contacts 1NO+1NC	NA G110AB-DN2	NA G110BB-DN2	NA G110EB-DN2	NA G110FB-DN2	/	/	NA G112KC-DN2	NA G112KD-DN2
Slow action contacts 1NO+2NC	NA G120AB-DN2	NA G120BB-DN2	NA G120EB-DN2	NA G120FB-DN2	/	/	NA G122KC-DN2	NA G122KD-DN2
Slow action contacts 2NO+2NC	NA G220AB-DN2	NA G220BB-DN2	NA G220EB-DN2	NA G220FB-DN2	/	/	NA G222KC-DN2	NA G222KD-DN2

M12 connector, right



To order a product with M12 right connector, replace DN2 with DMK in the codes shown above.
 Example:
 NA B110AA-DN2 →
 NA B110AA-DMK

M12 connector, bottom




To order a product with M12 bottom connector, replace DN2 with SMK in the codes shown above.
 Example:
 NA B110AA-DN2 →
 NA B110AA-SMK

AMP Superseal 1.5 connector



To order a product with AMP connector, replace DN2 with SAK in the codes shown above. Example:
 NA B110AA-DN2 →
 NA B110AA-SAK

Cable and M12 connector



To order a product with cable and M12 connector replace DN2 with DM0.2 in the codes shown above. Example:
 NA B110AA-DN2 →
 NA B110AA-DM0.2

NF series

Technopolymer housing

Cable length 2 m (other cable lengths available on request)
 Mounting hole spacing 20 mm
 Protection degrees IP67 and IP69K
 Marks:



Snap action contacts 1NO+1NC	NF B110AB-DN2	NF B110BB-DN2	NF B110EB-DN2	NF B110FB-DN2	NF B110HB-DN2	NF B110HE-DN2	NF B112KC-DN2	NF B112KD-DN2
Snap action contacts 1NO+2NC	NF B120AB-DN2	NF B120BB-DN2	NF B120EB-DN2	NF B120FB-DN2	NF B120HB-DN2	NF B120HE-DN2	NF B122KC-DN2	NF B122KD-DN2
Snap action contacts 2NO+2NC	NF B220AB-DN2	NF B220BB-DN2	NF B220EB-DN2	NF B220FB-DN2	NF B220HB-DN2	NF B220HE-DN2	NF B222KC-DN2	NF B222KD-DN2
Slow action contacts 1NO+1NC	NF G110AB-DN2	NF G110BB-DN2	NF G110EB-DN2	NF G110FB-DN2	/	/	NF G112KC-DN2	NF G112KD-DN2
Slow action contacts 1NO+2NC	NF G120AB-DN2	NF G120BB-DN2	NF G120EB-DN2	NF G120FB-DN2	/	/	NF G122KC-DN2	NF G122KD-DN2
Slow action contacts 2NO+2NC	NF G220AB-DN2	NF G220BB-DN2	NF G220EB-DN2	NF G220FB-DN2	/	/	NF G222KC-DN2	NF G222KD-DN2

M12 connector, right



To order a product with M12 right connector, replace DN2 with DMK in the codes shown above.
 Example:
 NF B110AA-DN2 →
 NF B110AA-DMK

M12 connector, bottom



To order a product with M12 bottom connector, replace DN2 with SMK in the codes shown above.
 Example:
 NF B110AA-DN2 →
 NF B110AA-SMK

AMP Superseal 1.5 connector




To order a product with AMP connector, replace DN2 with SAK in the codes shown above. Example:
 NF B110AA-DN2 →
 NF B110AA-SAK

Cable and M12 connector




To order a product with cable and M12 connector replace DN2 with DM0.2 in the codes shown above. Example:
 NF B110AA-DN2 →
 NF B110AA-DM0.2

Accessories



By placing spacers between the switches, 2 or more pre-wired switches can be mounted side by side, preventing them from moving with respect to each other.



Article	Description
VN DT1F	Spacer for NA and NF series

Packs of 10 pcs. We only accept orders for complete packaging units.

Accessories

See page 71.
 For a complete list of accessories, see the general catalogues.





Housings

NA metal housing
hole spacing 20 mm



NF technopolymer housing
hole spacing 20 mm



NA B11000	⊕	1NO+1NC	R	NF B11000	⊕	1NO+1NC	R
NA G11000	⊕	1NO+1NC	L	NF G11000	⊕	1NO+1NC	L
NA B12000	⊕	1NO+2NC	R	NF B12000	⊕	1NO+2NC	R
NA G12000	⊕	1NO+2NC	L	NF G12000	⊕	1NO+2NC	L
NA B22000	⊕	2NO+2NC	R	NF B22000	⊕	2NO+2NC	R
NA G22000	⊕	2NO+2NC	L	NF G22000	⊕	2NO+2NC	L

Contact type: **R** = snap action **L** = slow action

Connectors with cable

Connector
for NA housings



Connector
for NF housings



Cable
length (m)

VN CM11DN2	1NO+1NC	VN CP11DN2	1NO+1NC	2
VN CM11DN5	1NO+1NC	VN CP11DN5	1NO+1NC	5
VN CM12DN2	1NO+2NC	VN CP12DN2	1NO+2NC	2
VN CM12DN5	1NO+2NC	VN CP12DN5	1NO+2NC	5
VN CM22DN2	2NO+2NC	VN CP22DN2	2NO+2NC	2
VN CM22DN5	2NO+2NC	VN CP22DN5	2NO+2NC	5

M12 or AMP connectors

M12 connector, right,
for NA housings




M12 connector, bottom,
for NA housings



Cable and M12
connector for NA
housings



M12 connector, right,
for NF housings



M12 connector,
bottom, for NF
housings



AMP Superseal 1.5
connector for NF housings



Cable and M12
connector for NF
housings



VN CM11DMK 1NO+1NC	VN CM11SMK 1NO+1NC	VN CM11DM0.2 1NO+1NC	VN CP11DMK 1NO+1NC	VN CP11SMK 1NO+1NC	VN CP11SAK 1NO+1NC	VN CP11DM0.2 1NO+1NC
VN CM22DMK 2NO+2NC	VN CM22SMK 2NO+2NC	VN CM22DM0.2 2NO+2NC	VN CP22DMK 2NO+2NC	VN CP22SMK 2NO+2NC	VN CP02SAK 2NC	VN CP22DM0.2 2NO+2NC

Attention! Always check that the applied electric load is within the voltage and current limits defined for the connectors.

Actuators

Unidirectional roller
lever

VN AA0AA ⊕	VN AA0AB ⊕	VN AA0AC ⊕	VN AA0AE ⊕	VN AA0BB ⊕	VN AA0BE ⊕	VN AA0CB ⊕	VN AA0CH ⊕	VN AA0CP ⊕
VN AA0CV ⊕	VN AA0EB ⊕	VN AA0EE ⊕	VN AA0FB ⊕	VN AA0GB ⊕	VN AA0HB	VN AA0HE	VN AA0HH	VN AA0BB-W5 ⊕

Plunger with Ø 6 mm ball

Levers

Attention! These separate actuators can be used only with items of the NA and NF series.

VN A00KA ⊕	VN A00KB ⊕	VN A00KC ⊕	VN A00KD ⊕	VN A00KE ⊕	VN A00KF ⊕	VN A00KG ⊕	VN A00KH ⊕	VN A00KP ⊕
VN A00LB	VN A00LE	VN A00LH	VN A00LL	VN AA200 ⊕	VN AA000-W5 ⊕			

Stainless steel rod 3 x 3 x 125 mm, adjustable

Stainless steel rod Ø 3 x 125 mm, adjustable

Glass fibre rod Ø 6 x 200 mm, adjustable







Metal head for swivelling lever actuators

90° redirection

⚠ Installation for safety applications:
 To obtain a safety switch with positive opening, ⊕ only use housings and actuators which are marked with the symbol ⊕ for positive opening next to their article code ⊕.
 Example:
VN A00KB ⊕ + VN AA200 ⊕ + NA B11000 ⊕

MK series

Screw terminals

Technopolymer housing
 Versions with positive opening ⊕
 Marks:      

Maximum protection degree IP40
 Maximum protection degree IP65

Direct actuation
 1NO+1NC, snap action



MK V11D01	MK V11D02	MK V11D03	MK V11D04	MK V11D05 ⊕	MK V11D06 ⊕	MK V11D08 ⊕
MK V12D01	MK V12D02	MK V12D03	MK V12D04	MK V12D05 ⊕	MK V12D06 ⊕	MK V12D08 ⊕

Direct actuation
 1NO+1NC, snap action



Maximum protection degree IP40
 Maximum protection degree IP65

MK V11D09 ⊕	MK V11D10 ⊕	MK V11D12 ⊕	MK V11D13 ⊕	MK V11D15 ⊕	MK V11D17 ⊕	MK V11D18 ⊕
MK V12D09 ⊕	MK V12D10 ⊕	MK V12D12 ⊕	MK V12D13 ⊕	MK V12D15 ⊕	MK V12D17 ⊕	MK V12D18 ⊕


Direct actuation
 1NO+1NC, snap action



Maximum protection degree IP40
 Maximum protection degree IP65

MK V11D19 ⊕	MK V11D30	MK V11D31	MK V11D32	MK V11D35	MK V11D37	MK V11D40
MK V12D19 ⊕	MK V12D30	MK V12D31	MK V12D32	MK V12D35	MK V12D37	MK V12D40

Direct actuation
 1NO+1NC, snap action

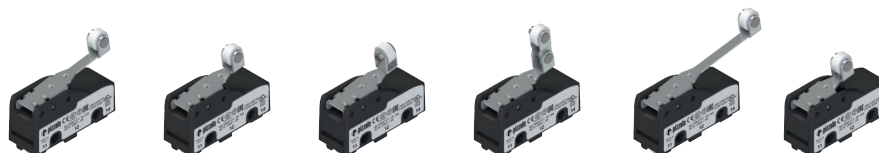

Maximum protection degree IP40
 Maximum protection degree IP65

MK V11D42	MK V11D45	MK V11D46	MK V11D47	MK V11D53	MK V11D59
MK V12D42	MK V12D45	MK V12D46	MK V12D47	MK V12D53	MK V12D59

Direct actuation at the back
 1NO+1NC, snap action



Maximum protection degree IP40
 Maximum protection degree IP65

MK V11F30	MK V11F31 ⊕	MK V11F32	MK V11F35	MK V11F40	MK V11F42 ⊕	MK V11F45 ⊕
MK V12F30	MK V12F31 ⊕	MK V12F32	MK V12F35	MK V12F40	MK V12F42 ⊕	MK V12F45 ⊕


Direct actuation at the back
 1NO+1NC, snap action




Maximum protection degree IP40
 Maximum protection degree IP65

MK V11F46 ⊕	MK V11F47 ⊕	MK V11F49 ⊕	MK V11F53	MK V11F59 ⊕
MK V12F46 ⊕	MK V12F47 ⊕	MK V12F49 ⊕	MK V12F53	MK V12F59 ⊕


Circuit diagram



Mobile contact with single interruption and double contacts

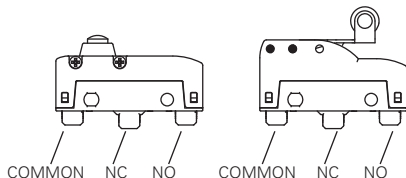

Actuators with variable orientation



Thanks to our new lateral fixing system, the roller of the microswitches MK ●●●15 and MK ●●●17 can be now rotated in 90° steps.

Terminal types



V (example: MK V11D04)
 Screw with self-lifting plate



H (example: MK H11D04)
 Faston 6.3 mm, vertical

Protection degree

IP00 without terminal cover
 IP20 (with terminal covers VF C01, VF C03)
 IP40 (with terminal covers VF MKC•1•, VF C02)
 IP65 (with terminal covers VF MKC•22, VF MKC•23)



MK series

Faston terminals

Technopolymer housing
Versions with positive opening
Marks:

Maximum protection degree IP40
Maximum protection degree IP65

Direct actuation

1NO+1NC, snap action



MK H11D01	MK H11D02	MK H11D03	MK H11D04	MK H11D05	MK H11D06	MK H11D08
MK H12D01	MK H12D02	MK H12D03	MK H12D04	MK H12D05	MK H12D06	MK H12D08

Direct actuation

1NO+1NC, snap action



MK H11D09	MK H11D10	MK H11D12	MK H11D13	MK H11D15	MK H11D17	MK H11D18
MK H12D09	MK H12D10	MK H12D12	MK H12D13	MK H12D15	MK H12D17	MK H12D18

Direct actuation

1NO+1NC, snap action



MK H11D19	MK H11D30	MK H11D31	MK H11D32	MK H11D35	MK H11D37	MK H11D40
MK H12D19	MK H12D30	MK H12D31	MK H12D32	MK H12D35	MK H12D37	MK H12D40

Direct actuation


1NO+1NC, snap action



MK H11D42	MK H11D45	MK H11D46	MK H11D47	MK H11D53	MK H11D59
MK H12D42	MK H12D45	MK H12D46	MK H12D47	MK H12D53	MK H12D59

Direct actuation at the back

1NO+1NC, snap action

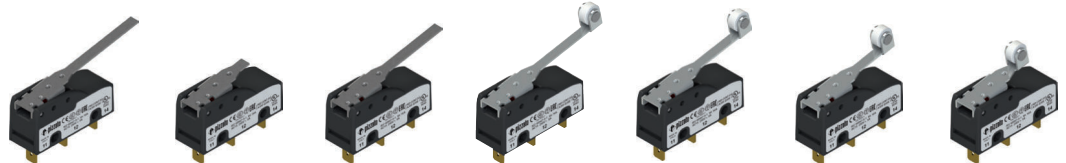

MK H11F30	MK H11F31	MK H11F32	MK H11F35	MK H11F40	MK H11F42	MK H11F45
MK H12F30	MK H12F31	MK H12F32	MK H12F35	MK H12F40	MK H12F42	MK H12F45

Direct actuation at the back

1NO+1NC, snap action



MK H11F46	MK H11F47	MK H11F49	MK H11F53	MK H11F59
MK H12F46	MK H12F47	MK H12F49	MK H12F53	MK H12F59

Protective terminal covers

Packs of 10 pcs. We only accept orders for complete packaging units.



Terminal cover for vertical faston terminals with strain relief cable gland and snap-in mounting. It allows installation of multiple switches side-by-side.



Terminal cover for screw terminals with strain relief cable gland and snap-in mounting. It allows installation of multiple switches side-by-side.

Article	Description	Prot. degree
VF MKCH11	Without gasket for cables Ø 5 ... 7.5 mm	IP40
VF MKCH12	Without gasket for cables Ø 4 ... 7.5 mm	IP40
VF MKCH13	Without gasket for cables Ø 2 ... 5 mm	IP40
VF MKCH22	With gasket for cables Ø 4 ... 7.5 mm	IP65
VF MKCH23	With gasket for cables Ø 2 ... 5 mm	IP65


Article	Description	Prot. degree
VF MKCV11	Without gasket for cables Ø 5 ... 7.5 mm	IP40
VF MKCV12	Without gasket for cables Ø 4 ... 7.5 mm	IP40
VF MKCV13	Without gasket for cables Ø 2 ... 5 mm	IP40
VF MKCV22	With gasket for cables Ø 4 ... 7.5 mm	IP65
VF MKCV23	With gasket for cables Ø 2 ... 5 mm	IP65



Protective terminal cover for screw terminals. Protection degree IP20.



Protective terminal cover for screw terminals with PG9 cable gland for multipolar cables Ø 5 ... 7 mm. Protection degree IP40.




Protective terminal cover for screw terminals, snap-in mounting. It allows installation of multiple switches side-by-side. Protection degree IP20.

Article	Description	Article	Description	Article	Description
VF C01	Protective terminal cover	VF C02	Protective terminal cover	VF C03	Protective terminal cover

MS series

Solder terminals

Technopolymer housing 

Marks:   

Direct actuation
1NO+1NC,
snap action



Maximum protection degree IP40

MS 05

MS 08

MS 09

MS 10

MS 15

MS 17

MS 20

Direct actuation

1NO+1NC,
snap action



Maximum protection degree IP40

MS 30

MS 40


MS 42

MS 45

MS 49

Inverted actuation

1NO+1NC,
snap action




Maximum protection degree IP40

MS 55

MS 60

MF series

Faston terminals

Technopolymer housing 

Marks:   

Direct actuation
1NO+1NC,
snap action



Maximum protection degree IP40

MF 05

MF 08

MF 09

MF 10

MF 15

MF 17

MF 20

Direct actuation

1NO+1NC,
snap action



Maximum protection degree IP40

MF 30

MF 40

MF 42

MF 45

MF 49

Inverted actuation

1NO+1NC,
snap action




Maximum protection degree IP40

MF 55

MF 60


Orientable roller



It is possible to rotate the roller of the M• 20 microswitch in 90° steps.






Circuit diagram

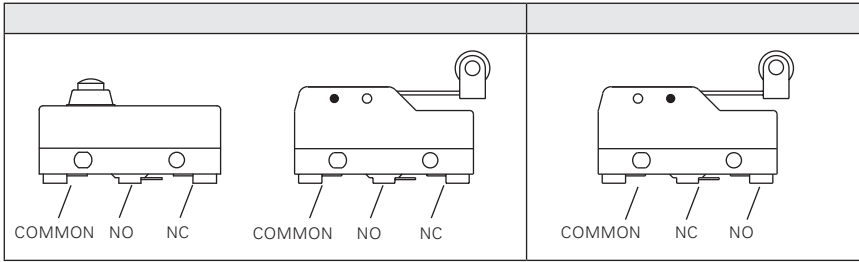

Change-over contact element with single interruption and three terminals.

Protective terminal covers

Packs of 10 pcs.










Article	Description
VF C01	Protective terminal cover

Article	Description
VF C02	Protective terminal cover






Article	Description
VF C03	Protective terminal cover

PA, PX series

Technopolymer housing 
 One M20x1.5 conduit entry
 Two lateral knock-out conduit entries
 Stainless steel external metallic parts
 Protection degree IP53 or IP65
 Contact block marks:      



With M25 hole for VF KIT31

Snap action contacts 1NO+1NC	PX 10110-M2 	PA 20100-M2 	PX 10110-BM2 
Snap action contacts 2NO+2NC	PX 10210-M2 	PA 20200-M2 	PX 10210-BM2 
Slow action contacts 1NO+1NC	PX 10310-M2 	PA 20300-M2 	PX 10310-BM2 

Code structure

article **PX 10110-AGM2** options

Foot switches		Protection colour	Threaded conduit entry
PX	closed version		
PA	open version		

Contact block combinations		Devices	Accessories (PX series only)
01	1NO+1NC, snap action		
02	2x(1NO+1NC), snap action	0	no accessories (standard)
03	1NO+1NC, slow action	1	with technopolymer carrying rod (400 mm)
04	2x(1NO+1NC), slow action	2	with M25 hole for VF KIT31
05	2x2NO, slow action	3	with M25 hole for VF KIT31 with stabilizing plate
06	2x2NC, slow action	4	with technopolymer carrying rod (660 mm)
07	2NC, slow action		
08	2NO, slow action		
09	1NO+1NC, slow action, make before break		
14	2NO, snap action		
15	2NC, snap action		
20	2x(1NO+1NC), snap action, shifted		
24	(1NO+1NC)+(2NC), snap action, shifted		

1	yellow RAL 1023 (standard)
2	red RAL 3020
4	grey RAL 7040
5	black RAL 9017
6	blue RAL 5017


M2	M20x1.5 (standard) PG 13.5
----	-------------------------------

Contact type	
	silver contacts (standard)
G	silver contacts with 1 µm gold coating
G1	silver contacts with 2.5 µm gold coating

Protection degree	
0	IP53
1	IP65


Attention! The feasibility of a code number does not mean the effective availability of a product. Please contact our sales office.

Selection diagram

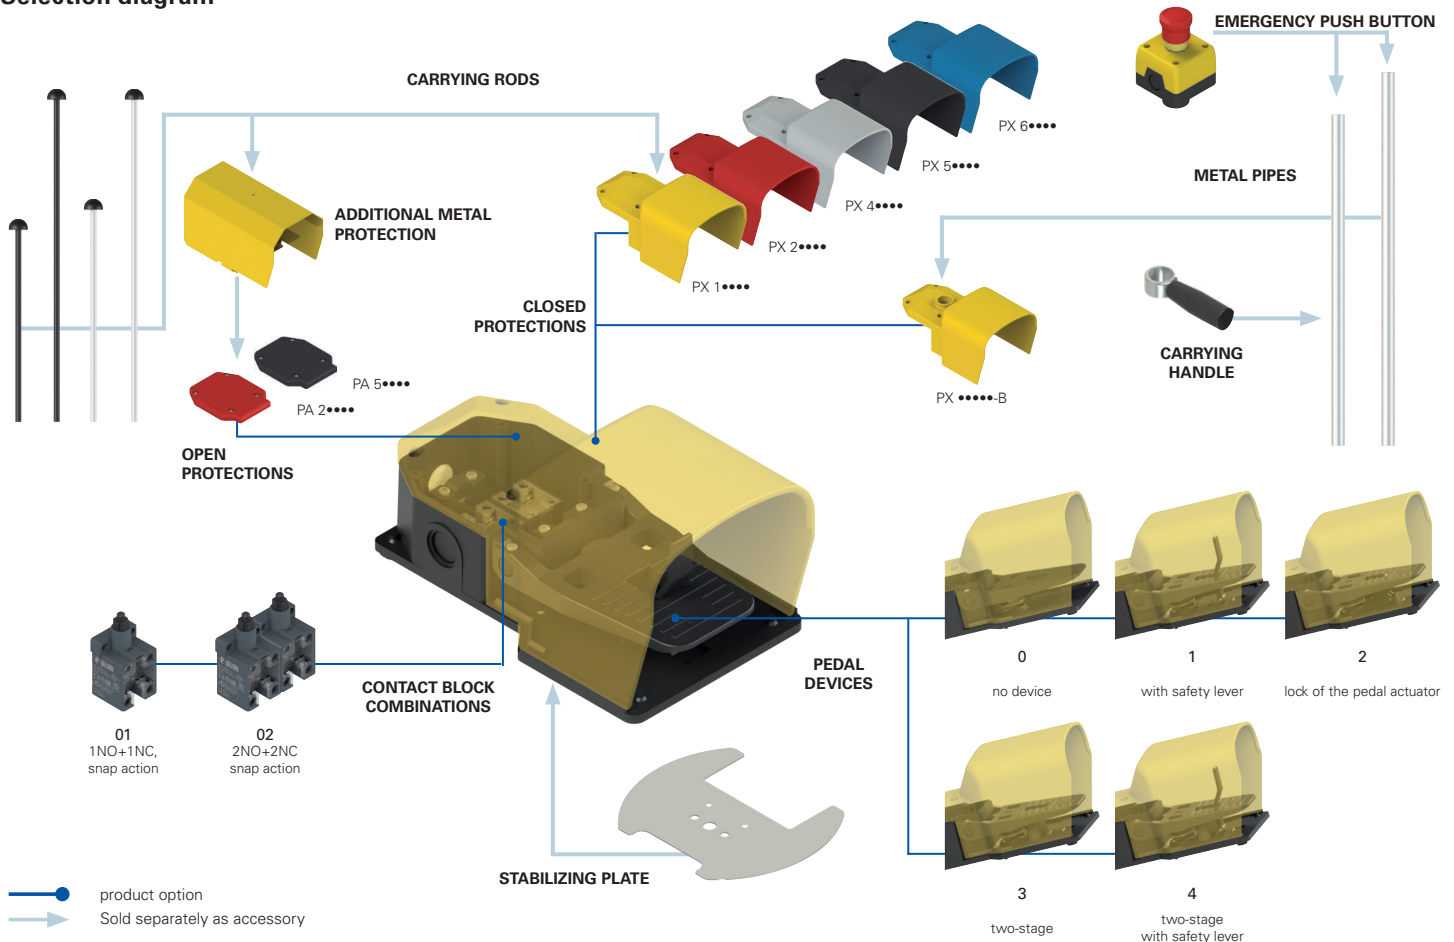


**Auxiliary elements for modular foot switches**

VF KIT20	VF KIT30	VF KIT21 (L=400 mm) VF KIT22 (L=660 mm)	VF KIT25 (L=400 mm) VF KIT26 (L=660 mm)
Joining element for technopolymer pedals with hole for carrying rod, with nuts, seals and self-tapping screws for the fixing of the two single pedals. Protection degree IP65.	Joining element for technopolymer pedals with M25x1.5 threaded hole, with nuts, seals and self-tapping screws for the fixing of the two single pedals. Protection degree IP65.	Plastic carrying rod set (can be connected to VF KIT20) with self-tapping screw for rod fixing.	Metal carrying rod set (can be connected to VF KIT20) with self-tapping screw for rod fixing.




VF KIT31 (L=660 mm) VF KIT29 (L=740 mm)	VF KIT18	VF KIT32 (1NC) ⊖ VF KIT33 (1NC+1NO) ⊖ VF KIT34 (2NC) ⊖	VF KIT35	VF KIT50
Ø 25 metal tube set with M25x1.5 threaded ends with brass nuts and gaskets.	Metal nut M25x1.5 to be used with VF KIT31 or VF KIT29 if off-the-shelf housings are used. Packs of 10 pcs.	Emergency stop button kit with mechanical positive actuation compliant with EN 60947-5-1 and EN ISO 13850, to combine with VF KIT31 or VF KIT29. Protection degree IP65.	Empty housing kit with Ø 22 mm hole, compliant with EN 60947-5-1, to combine with VF KIT31 or VF KIT29. Protection degree IP65.	Carrying handle kit for tube Ø 25 mm, to combine with VF KIT31 or VF KIT29.



VF KIT60	VF KIT61	VF KIT71	VF KIT81	VF B501 ⊕ (1NC+1NO, snap action) VF B601 ⊕ (1NC+1NO, slow action)
Metal stabilizing plate for single pedals.	Metal stabilizing plate for double pedals.	Additional metal protections for single PA series foot switches. In heavy-duty work environments, increased dimensions for safety shoe. Not applicable with VF KIT60.	Additional metal protections for PC series modular foot switches. In heavy-duty work environments, increased dimensions for safety shoe. Not applicable with VF KIT61.	Additional contact block for foot switches (all pedals are supplied with pre-installed contact blocks).

Modular foot switches - PC series


Using the bonding kits (VF KIT20 or VF KIT30), individual foot switches can be joined in multiple combinations.

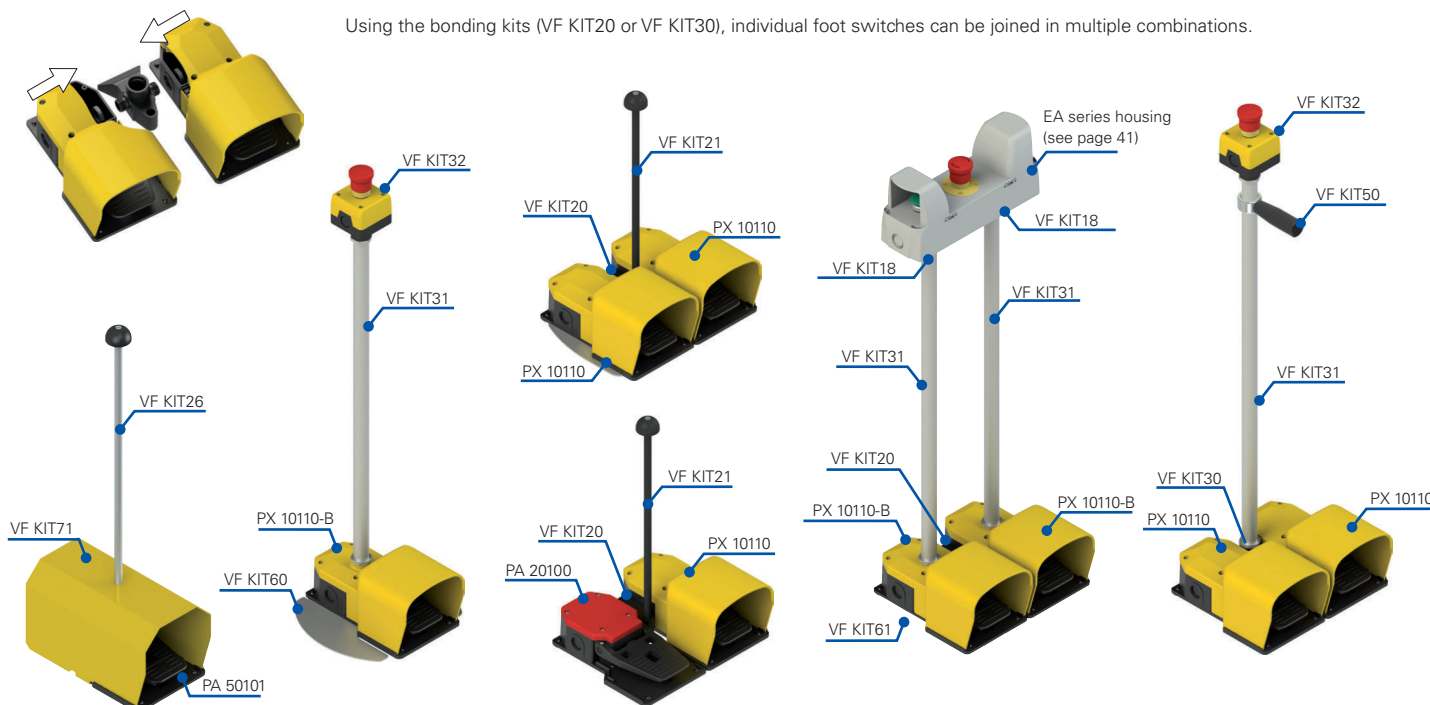

4 EROUND line introduction

Pizzato Elettrica's innovative EROUND control and signalling devices combine elegance and functionality in a single product. The ergonomic design allows a comfortable and easy use of the devices. The details have been meticulously designed, making the products suitable for application even on machines with a sophisticated appearance.

The devices of the EROUND line, thanks to their design and functionality, guarantee maximum reliability, and are suitable for any type of application. Most devices, not only have an IP67 protection degree, but have also passed the test proving their IP69K protection degree according to the prescriptions established by the ISO 20653 standard.

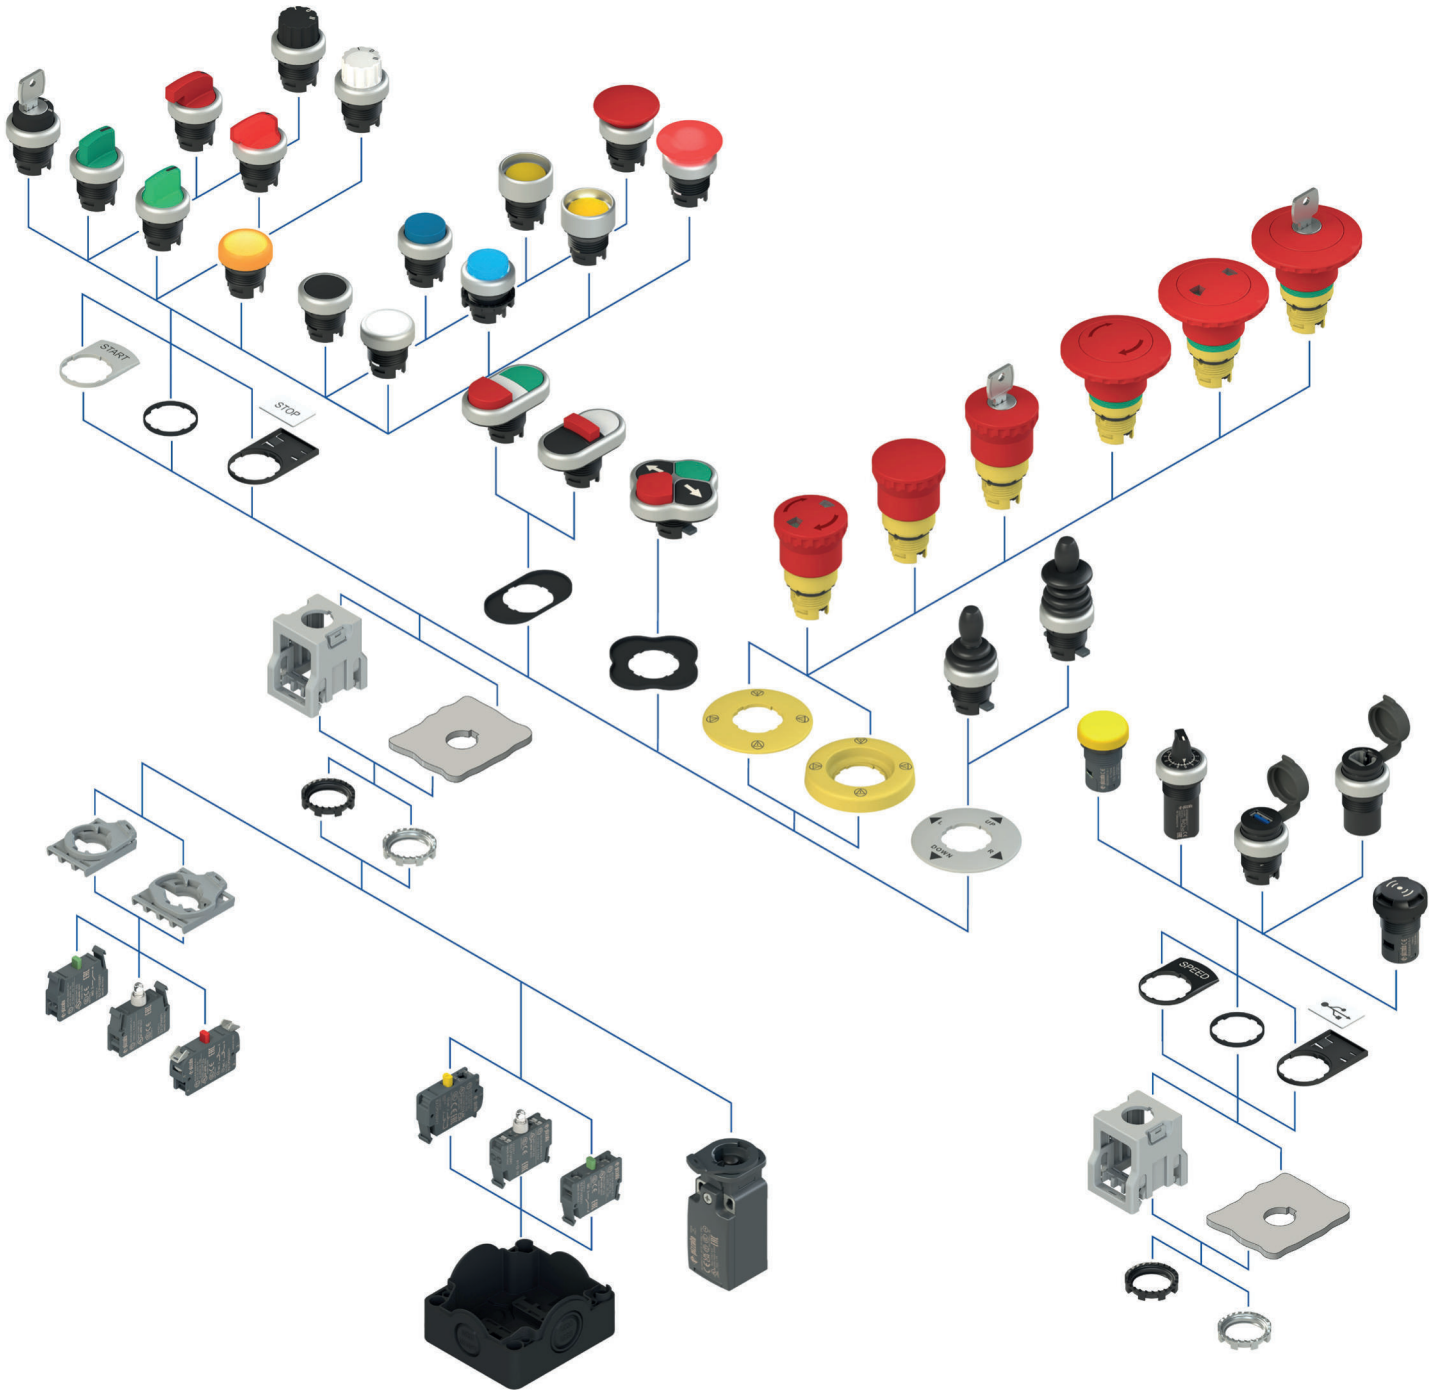



Buttons E2 PU series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:



Colour and engraving actuator	Spring-return button / satin chrome bezel			
	Flush	Projecting	Protected	Mushroom
without lens	E2 1PU2R0290	Same article, flush button	E2 1PU2P0290	-
black	E2 1PU2R1290	E2 1PU2S1290	E2 1PU2P1290	E2 1PU2F1490
white	E2 1PU2R2290	E2 1PU2S2290	E2 1PU2P2290	E2 1PU2F2490
red	E2 1PU2R3290	E2 1PU2S3290	E2 1PU2P3290	E2 1PU2F3490
green	E2 1PU2R4290	E2 1PU2S4290	E2 1PU2P4290	E2 1PU2F4490
yellow	E2 1PU2R5290	E2 1PU2S5290	E2 1PU2P5290	E2 1PU2F5490
blue	E2 1PU2R6290	E2 1PU2S6290	E2 1PU2P6290	E2 1PU2F6490
orange	E2 1PU2R8290	E2 1PU2S8290	E2 1PU2P8290	E2 1PU2F8490
red	E2 1PU2R329L1	E2 1PU2S329L1	-	E2 1PU2F349L1
green	E2 1PU2R429L2	E2 1PU2S429L2	E2 1PU2P429L2	E2 1PU2F449L2
black	E2 1PU2R129L1	E2 1PU2S129L1	-	E2 1PU2F149L1
white	E2 1PU2R229L2	E2 1PU2S229L2	E2 1PU2P229L2	E2 1PU2F249L2


Illuminated buttons E2 PL series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:



Colour and engraving actuator	Spring-return button / satin chrome bezel			
	Flush	Projecting	Protected	Mushroom
without lens	E2 1PL2R0290	Same article, flush button	E2 1PL2P0290	-
white	E2 1PL2R2290	E2 1PL2S2290	E2 1PL2P2290	E2 1PL2F2490
red	E2 1PL2R3290	E2 1PL2S3290	E2 1PL2P3290	E2 1PL2F3490
green	E2 1PL2R4290	E2 1PL2S4290	E2 1PL2P4290	E2 1PL2F4490
yellow	E2 1PL2R5290	E2 1PL2S5290	E2 1PL2P5290	E2 1PL2F5490
blue	E2 1PL2R6290	E2 1PL2S6290	E2 1PL2P6290	E2 1PL2F6490
orange	E2 1PL2R8290	E2 1PL2S8290	E2 1PL2P8290	E2 1PL2F8490
red	E2 1PL2R329L1	E2 1PL2S329L1	-	E2 1PL2F349L1
green	E2 1PL2R429L2	E2 1PL2S429L2	E2 1PL2P429L2	E2 1PL2F449L2
white	E2 1PL2R229L1	E2 1PL2S229L1	-	E2 1PL2F249L1
white	E2 1PL2R229L2	E2 1PL2S229L2	E2 1PL2P229L2	E2 1PL2F249L2

For ordering a maintained button replace 1PU2 with 1PU1 in the respective article code. Example: E2 1PU2R0210 → E2 1PU1R0210
For ordering a button with black bezel replace 9 with 1 in the respective article code. Example: E2 1PU2R0290 → E2 1PU1R0210
Please contact our technical department for buttons with custom markings.



Double/triple buttons E2 PD/PT series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:



Colour and engraving actuator	Spring-return button / satin chrome bezel		Colour and engraving actuator	Spring-return button satin chrome bezel
	Upper button flush Central cap, flush Lower button flush	Upper button flush Central cap, flush Lower button projecting		
green button	E2 1PDRL90423	E2 1PDRL90423	"I" green button	E2 1PTRS9AAAY
white cap, illuminated red button	E2 1PDRL9AAAD	E2 1PDRL9AAAD	"II" green button	E2 1PTRS9AAAZ
"O" red button	E2 1PDRL9AAAP	E2 1PDRL9AAAP	"↓" green button	E2 1PTRS9AABD
"START" green button	E2 1PDRL90221	E2 1PDRL90221	"↑" white button	E2 1PTRS9AABA
"STOP" red button	E2 1PDRL9AAA	E2 1PDRL9AAA	"STOP" red button	E2 1PTRS9AABE
white cap, illuminated black button	E2 1PDRL9AAAN	E2 1PDRL9AAAN	"↓" black button	E2 1PTRS9AABF
"I" white button	E2 1PDRL9AAAAB	E2 1PDRL9AAAAB	"↑" green button	E2 1PTRS9AABB
"O" black button			"↓" black button	
"START" white button			"STOP" red button	
"STOP" black button			"↑" black button	
"↓" black button			"+" green button	
"↑" black button			"STOP" red button	
"↓" black button			"I" green button	

Quadruple buttons E2 PQ series

Protection degree IP67
Ambient temperature -25°C ... +80°C
Marks:








Colour and engraving actuator (starting from the top and clockwise)	Spring-return button satin chrome bezel	
	Upper button flush Right button flush Lower button flush Left button flush	
"↓" black button	E2 1PQFA9QAAA	
"↓" black button	E2 1PQFA9QAAAB	
"START" green button	E2 1PQFA9QAAC	
"↓" black button	E2 1PQFA9QAAD	
"↓" black button	E2 1PQFA9QAAD	
"I" green button	E2 1PQFA9QAAD	
"↓" black button	E2 1PQFA9QAAD	
"O" red button	E2 1PQFA9QAAD	
"↓" black button	E2 1PQFA9QAAD	
"I" white button	E2 1PQFA9QAAD	
"O" black button	E2 1PQFA9QAAD	
"↓" black button	E2 1PQFA9QAAD	







For ordering a button with black bezel replace 9 with 1 in the respective article code. Example: E2 1PDRL90423 → E2 1PDRL10423
Please contact our technical department for buttons with custom markings.

4D Selector switches

E2 SE series selector switches with 2 or 3 positions

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:     








Positions	Satin chrome bezel						
	black	white	red	green	yellow	blue	orange
	E2 1SE12AVA19AB	E2 1SE12AVA29AB	E2 1SE12AVA39AB	E2 1SE12AVA49AB	E2 1SE12AVA59AB	E2 1SE12AVA69AB	E2 1SE12AVA89AB
	E2 1SE12EVA19AB	E2 1SE12EVA29AB	E2 1SE12EVA39AB	E2 1SE12EVA49AB	E2 1SE12EVA59AB	E2 1SE12EVA69AB	E2 1SE12EVA89AB
	E2 1SE13ACE19AB	E2 1SE13ACE29AB	E2 1SE13ACE39AB	E2 1SE13ACE49AB	E2 1SE13ACE59AB	E2 1SE13ACE69AB	E2 1SE13ACE89AB
	E2 1SE13ECE19AB	E2 1SE13ECE29AB	E2 1SE13ECE39AB	E2 1SE13ECE49AB	E2 1SE13ECE59AB	E2 1SE13ECE69AB	E2 1SE13ECE89AB
	E2 1SE13FCE19AB	E2 1SE13FCE29AB	E2 1SE13FCE39AB	E2 1SE13FCE49AB	E2 1SE13FCE59AB	E2 1SE13FCE69AB	E2 1SE13FCE89AB
	E2 1SE13GCE19AB	E2 1SE13GCE29AB	E2 1SE13GCE39AB	E2 1SE13GCE49AB	E2 1SE13GCE59AB	E2 1SE13GCE69AB	E2 1SE13GCE89AB







For ordering a selector switch with black bezel replace 9 with 1 in the respective article code. Example: E2 1SE12AVA39AB → E2 1SE12AVA31AB
For ordering a knob selector switch replace 1 with 4 in the respective article code. Example: E2 1SE12AVA39AB → E2 1SE42AVA39AB
For ordering a selector switch with long handle replace 1 with 2 in the respective article code. Example: E2 1SE12AVA39AB → E2 1SE22AVA39AB



Illuminated selector switches with 2 or 3 positions E2 SL series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:     








Positions	Satin chrome bezel					
	white	red	green	yellow	blue	orange
	E2 1SL12AVD29AB	E2 1SL12AVD39AB	E2 1SL12AVD49AB	E2 1SL12AVD59AB	E2 1SL12AVD69AB	E2 1SL12AVD89AB
	E2 1SL12EVD29AB	E2 1SL12EVD39AB	E2 1SL12EVD49AB	E2 1SL12EVD59AB	E2 1SL12EVD69AB	E2 1SL12EVD89AB
	E2 1SL13ACH29AB	E2 1SL13ACH39AB	E2 1SL13ACH49AB	E2 1SL13ACH59AB	E2 1SL13ACH69AB	E2 1SL13ACH89AB
	E2 1SL13ECH29AB	E2 1SL13ECH39AB	E2 1SL13ECH49AB	E2 1SL13ECH59AB	E2 1SL13ECH69AB	E2 1SL13ECH89AB
	E2 1SL13FCH29AB	E2 1SL13FCH39AB	E2 1SL13FCH49AB	E2 1SL13FCH59AB	E2 1SL13FCH69AB	E2 1SL13FCH89AB
	E2 1SL13GCH29AB	E2 1SL13GCH39AB	E2 1SL13GCH49AB	E2 1SL13GCH59AB	E2 1SL13GCH69AB	E2 1SL13GCH89AB

For ordering a selector switch with black bezel replace 9 with 1 in the respective article code. Example: E2 1SL12AVD39AB → E2 1SL12AVD31AB
For ordering a knob selector switch replace 1 with 4 in the respective article code. Example: E2 1SL12AVD39AB → E2 1SL42AVD39AB
For ordering a selector switch with long handle replace 1 with 2 in the respective article code. Example: E2 1SL12AVD39AB → E2 1SL22AVD39AB

















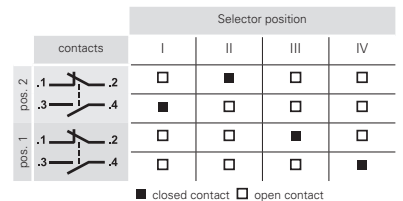

E2 AC series complete units with 4-position selector switches

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:     



Contact diagram



Colour and engraving actuator	Selector switches					Illuminated selector switches				
	Contacts			Positions	Satin chrome bezel	Contacts			Satin chrome bezel	
	pos. 2	pos. 3	pos. 1			pos. 2	pos. 3	pos. 1		
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2203	-	-	-	-	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2211	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2259	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2219	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2267	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2227	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2275	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2235	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2283	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2243	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2291	
	1NO+1NC	-	1NO+1NC		E2 AC-DXBC2251	1NO+1NC	LED	1NO+1NC	E2 AC-DXBC2299	

On request, selector switches can be customized with a knob or a long handle.
On request, knob selector switches can be customized with symbols and inscriptions.
Note: The LED supplied with the illuminated selector switch has a supply voltage of 12 ... 30 Vac/dc. Other voltages on request.



Key selector switches E2 SC series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:



Legend

- Maintained
- Spring-return
- Key extraction position

For ordering a selector switch with black bezel replace 9 with 1 in the respective article code. Example: E2 1SC2AVA19AA → E2 1SC2AVA11AA

The standard colour of the selectors with the codes shown on the side is BLACK. Other colours on request. Key selectors switches can be customized with symbols and inscriptions on request. All keys of the selector switches have the PY333 key coding. Other codes on request.

Actuator colour and engraving	Positions	3 positions	
		Satin chrome bezel	
		E2 1SC3ACE19AA	
		E2 1SC3BCE19AA	
		E2 1SC3CCE19AA	
		E2 1SC3DCE19AA	
		E2 1SC3ECE19AA	
		E2 1SC3FCE19AA	
		E2 1SC3GCE19AA	

Actuator colour and engraving	Positions	3 positions	
		Satin chrome bezel	
		E2 1SC3HCE19AA	
		E2 1SC3LCE19AA	
		E2 1SC3MCE19AA	
		E2 1SC3NCE19AA	
		E2 1SC3PCE19AA	
		E2 1SC3QCE19AA	
		E2 1SC3RCE19AA	

Actuator colour and engraving	Positions	2 positions	
		Satin chrome bezel	
		E2 1SC2AVA19AA	
		E2 1SC2BVA19AA	
		E2 1SC2CVA19AA	
		E2 1SC2DVA19AA	
		E2 1SC2ACA19AA	
		E2 1SC2BCA19AA	
		E2 1SC2DCA19AA	

Emergency stop buttons

Emergency stop buttons E2 PE series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +80°C
Marks:



Body and actuator colour	Push-pull		Rotary release		Windowed push-pull		Windowed rotary release		Key release, key coding 333	
	Ø40 mm	Ø60 mm	Ø40 mm	Ø60 mm	Ø40 mm	Ø60 mm	Ø40 mm	Ø60 mm	Ø40 mm	Ø60 mm
Red mushroom Yellow body	E2 1PEPZ4531	E2 1PEPZ6531	E2 1PERZ4531	E2 1PERZ6531	E2 1PEPF4531	E2 1PEPF6531	E2 1PERF4531	E2 1PERF6531	E2 1PEBZ4531	E2 1PEBZ6531
Red mushroom Yellow body with green indication	E2 1PEPZ4731	E2 1PEPZ6731	E2 1PERZ4731	E2 1PERZ6731	E2 1PEPF4731	E2 1PEPF6731	E2 1PERF4731	E2 1PERF6731	E2 1PEBZ4731	E2 1PEBZ6731
Black mushroom Yellow body	E2 1PEPZ4511		E2 1PERZ4511		-				E2 1PEBZ4511	
Yellow mushroom Yellow body	E2 1PEPZ4551		E2 1PERZ4551		-					

Labels with shaped hole

Packs of 5 pcs.


	Acc. to ISO 13850		Acc. to ISO 13850			Acc. to ISO 13850		Acc. to ISO 13850		Acc. to ISO 13850
Ø 60 mm										
Ø 90 mm										

Luminous discs


Luminous discs VE DL series

Protection degree IP67
Ambient temperature: -25°C ... +70°C
Marks:

Yellow luminous disc, Ø 60 mm, without engraving. Acc. to ISO 13850.



Yellow luminous disc, Ø 60 mm, with engraving: Acc. to ISO 13850.








Yellow luminous disc, Ø 60 mm, with engraving: STOP STOP STOP STOP







Operating voltage	12 Vac/dc	24 Vac/dc	12 Vac/dc	24 Vac/dc	12 Vac/dc	24 Vac/dc
Continuous light	VE DL5A5A00	VE DL1A5A00	VE DL5A5A13	VE DL1A5A13	VE DL5A5A09	VE DL1A5A09
Blinking light	VE DL5A5L00	VE DL1A5L00	VE DL5A5L13	VE DL1A5L13	VE DL5A5L09	VE DL1A5L09
Dual function	VE DL5A5D00	VE DL1A5D00	VE DL5A5D13	VE DL1A5D13	VE DL5A5D09	VE DL1A5D09

4G Indicator lights








Indicator lights E2 IL series

Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +70°C
Marks:     

					
					
white	red	green	yellow	blue	orange
E2 11LA210	E2 11LA310	E2 11LA410	E2 11LA510	E2 11LA610	E2 11LA810





Monolithic indicator lights E6 IL series

Protection degree IP67
Ambient temperature: -40°C ... +70°C
Marks:     


						
Operating voltage						
	white	red	green	yellow	blue	orange
12..30 Vac/dc	E6 11L1A2110	E6 11L1A3110	E6 11L1A4110	E6 11L1A5110	E6 11L1A6110	E6 11L1A8110
120 Vac	E6 11L3A2110	E6 11L3A3110	E6 11L3A4110	E6 11L3A5110	E6 11L3A6110	E6 11L3A8110
230 Vac	E6 11L4A2110	E6 11L4A3110	E6 11L4A4110	E6 11L4A5110	E6 11L4A6110	E6 11L4A8110

4H Joysticks

Joysticks with contacts E2 MA series

Protection degrees IP67 and IP69K
Ambient temperature: -40°C ... +80°C
Marks:     

Legend:
● maintained actuation
▶ spring-return actuation

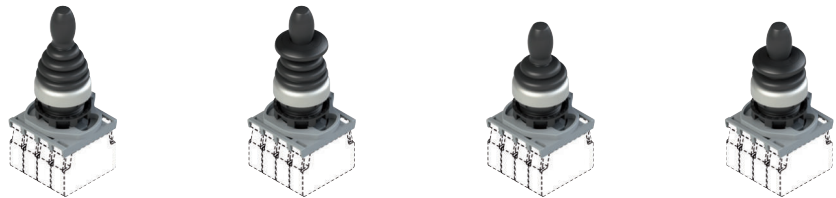

Functions	Contacts				Standard height (55 mm) without lock	Standard height (55 mm) with lock	Reduced height (45 mm) without lock	Reduced height (45 mm) with lock
	pos. 3	pos. 2	pos. 4	pos. 1	Satin chrome bezel	Satin chrome bezel	Satin chrome bezel	Satin chrome bezel
 UP spring-return, RIGHT spring-return, DOWN spring-return, LEFT spring-return	1NO	1NO	1NO	1NO	E2 AC-DXBC2602	E2 AC-DXBC2604	E2 AC-DXBC2603	E2 AC-DXBC2605
 LEFT spring-return, RIGHT spring-return	1NO			1NO	E2 AC-DXBC2601	E2 AC-DXBC2613	E2 AC-DXBC2618	E2 AC-DXBC2622
 UP spring-return, DOWN spring-return		1NO	1NO		E2 AC-DXBC2600	E2 AC-DXBC2611	E2 AC-DXBC2616	E2 AC-DXBC2620
 UP maintained, RIGHT maintained, DOWN maintained, LEFT maintained	1NO	1NO	1NO	1NO	E2 AC-DXBC2608	E2 AC-DXBC2614	E2 AC-DXBC2609	E2 AC-DXBC2623
 LEFT maintained, RIGHT maintained	1NO			1NO	E2 AC-DXBC2607	E2 AC-DXBC2612	E2 AC-DXBC2617	E2 AC-DXBC2621
 UP maintained, DOWN maintained		1NO	1NO		E2 AC-DXBC2606	E2 AC-DXBC2610	E2 AC-DXBC2615	E2 AC-DXBC2619

Round labels with shaped hole

Rectangular labels with shaped hole



VE TF32A9130

VE TF12A1230

VE TF32A9133

VE TF12A1233

VE TF32G9131

VE TF12G1231

VE TF32G9134

VE TF12G1234

VE TF32G9132

VE TF12G1232

USB Type-A sockets E2 USB series

Protection degree IP67
Ambient temperature: -25°C ... +70°C
Marks:

For ordering a socket with black bezel replace 9 with 1 in the respective article code. Example:
E2 1USB9CAK → E2 1USB1CAK

For ordering a USB 3.0 socket replace C with A in the respective article code. Example:
E2 1USB9CAK → E2 1USB1AAK



Rear connection	Front connection Integrated USB 2.0 Type-A female connector
integrated USB Type-A socket	E2 1USB9CAK
Output with PVC cable, length 0.8 m and USB Type-A male connector	E2 1USB9CN0.8
Output with PVC cable, length 1.8 m and USB Type-A male connector	E2 1USB9CN1.8
Output with PVC cable, length 3 m and USB Type-A male connector	E2 1USB9CN3
Output with PVC cable, length 5 m and USB Type-A male connector (available only with USB 2.0 socket)	E2 1USB9CN5

USB Type-C sockets E2 USB series

Protection degree IP67
Ambient temperature: -25°C ... +70°C
Marks:



For ordering a socket with black bezel replace 9 with 1 in the respective article code. Example:
E2 1USB9EH0.8 → E2 1USB1EH0.8



Rear connection	Front connection Integrated USB 3.1 Type-C female connector
Output with PVC cable (length 0.8 m) and USB Type-C male connector	E2 1USB9EH0.8
Output with PVC cable (length 1.8 m) and USB Type-C male connector	E2 1USB9EH1.8

RJ45 sockets E2 RJ45 series

Protection degree IP67
Ambient temperature: -25°C ... +70°C
Speed up to 10 Gb/s for Cat. 6
Marks:

For ordering a socket with black bezel replace 9 with 1 in the respective article code. Example:
E2 1RJ459AAK → E2 1RJ451AAK



Connection type	Transfer speeds	
	1 Gb/s (for Cat. 5e)	10 Gb/s (for Cat. 6)
Integrated RJ45 socket	E2 1RJ459AAK	E2 1RJ459CAK
Output with PVC cable (length 1 m) and RJ45 male connector	E2 1RJ459AN1	E2 1RJ459CN1
Output with PVC cable (length 1.5 m) and RJ45 male connector	E2 1RJ459AN1.5	E2 1RJ459CN1.5
Output with PVC cable (length 2.5 m) and RJ45 male connector	E2 1RJ459AN2.5	E2 1RJ459CN2.5

Potentiometers

Potentiometers E6 DM series

Protection degrees IP67 and IP69K
Ambient temperature: -40°C ... +80°C
Potentiometer with Cermet technology
Marks:

Potentiometer 1 W

Potentiometer 0.5 W

Packs of 50 pcs.



For ordering a potentiometer with black bezel replace 9 with 1 in the respective article code. Example:
E6 1DM001K-D119 → E6 1DM001K-D111

For ordering a potentiometer with black bezel replace 9 with 1 in the respective article code. Example:
E6 1DM001K-D319 → E6 1DM001K-D311

Resistance	Max power	Article
1 kΩ	1 W	E6 1DM001K-D119
2.2 kΩ	1 W	E6 1DM02K2-D119
4.7 kΩ	1 W	E6 1DM04K7-D119
10 kΩ	1 W	E6 1DM010K-D119
22 kΩ	1 W	E6 1DM022K-D119
47 kΩ	1 W	E6 1DM047K-D119
100 kΩ	0.9 W	E6 1DM100K-D119
470 kΩ	0.23 W	E6 1DM470K-D119

Resistance	Max power	Article
1 kΩ	0.5 W	E6 1DM001K-D319
2.2 kΩ	0.5 W	E6 1DM02K2-D319
4.7 kΩ	0.5 W	E6 1DM04K7-D319
10 kΩ	0.5 W	E6 1DM010K-D319
22 kΩ	0.5 W	E6 1DM022K-D319
47 kΩ	0.5 W	E6 1DM047K-D319

Buzzers E6 IS series

Protection degree: IP40 (perforated lens)
IP67 (perforation-free lens)
Ambient temperature: -20°C ... +70°C
Marks:     




Sound type	Supply voltage	Perforated lens	dB	Perforation-free lens	dB
Continuous ←	12 Vac/dc	E6 1IS5A1CV1B	90	E6 1IS5B1CV1B	75
	24 Vac/dc	E6 1IS6A1CV1B	95	E6 1IS6B1CV1B	80
Pulsed ← -	12 Vac/dc	E6 1IS5A1PV1B	90	E6 1IS5B1PV1B	75
	24 Vac/dc	E6 1IS6A1PV1B	95	E6 1IS6B1PV1B	80

Single contact blocks































E2 CP/CF series single contact blocks

Protection degree IP20
(Solder connection — IP00)
Ambient temperature: -40°C ... +80°C

Positive opening contacts acc. to IEC 60947-5-1
Marks:      






Packs of **10 pcs.**



Contact block	Panel mounting			Base mounting	
	Screw connection	PUSH-IN spring-operated connection	Solder connection	Screw connection	PUSH-IN spring-operated connection
1NC, slow action	E2 CP01G2V1  	E2 CP01G2M1  	E2 CP01G2S0  	E2 CF01G2V1  	E2 CF01G2M1  
1NO, slow action	E2 CP10G2V1 	E2 CP10G2M1 	E2 CP10G2S0 	E2 CF10G2V1 	E2 CF10G2M1 
1NC, slow action, delayed	E2 CP01K2V1  	E2 CP01K2M1  	E2 CP01K2S0  	E2 CF01K2V1  	E2 CF01K2M1  
1NO, slow action, early make	E2 CP10L2V1 	E2 CP10L2M1 	E2 CP10L2S0 	E2 CF10L2V1 	E2 CF10L2M1 

E2 CP/CF series single self-monitored contact blocks

Protection degree IP20
Ambient temperature: -40°C ... +80°C

Positive opening contacts acc. to IEC 60947-5-1
Marks:      

Packs of **5 pcs.**



Contact block	Panel mounting Screw connection	Contact block	Base mounting in position 3 Screw connection
Slow action contacts 1NC self-monitored	E2 CP01S2V1  	Slow action contacts 1NC self-monitored	E2 CF01S2V1  

Note: Ideal in safety applications combined with emergency stop buttons E2•PE•••••, they automatically detect any detachment of the contact block from the emergency stop button.

Double contact blocks



4M

E2 CP/CF series double contact blocks

Protection degree IP20
Ambient temperature: -40°C ... +80°C

Positive opening contacts acc. to IEC 60947-5-1
Marks:

Packs of 5 pcs.



Contact block	Panel mounting Screw connection
Slow action contacts 1NO+1NC	E2 CP11G2V1
Slow action contacts 2NO	E2 CP20G2V1
Slow action contacts 2NC	E2 CP02G2V1

Contact block	Panel mounting Screw connection
Slow action contacts 1NO+1NC	E2 CF11G2V1
Slow action contacts 2NO	E2 CF20G2V1
Slow action contacts 2NC	E2 CF02G2V1

LED units

4N

E2 LP/LF series LED units

Protection degree IP20
(Solder connection — IP00)

Ambient temperature: -25°C ... +70°C
Marks:

Three supply voltages:
12 ... 30 Vac/dc, 120 Vac, 230 Vac

Packs of 5 pcs.



LED colour	Available device colour	Panel mounting									
		Screw connection			PUSH-IN spring-operated connection			Solder connection			
		Operating voltage									
		12 ... 30 Vac/dc	120 Vac	230 Vac	12 ... 30 Vac/dc	120 Vac	230 Vac	12 ... 30 Vac/dc	120 Vac	230 Vac	
	white	white / yellow	E2 LP1A2V1	E2 LP3A2V1	E2 LP4A2V1	E2 LP1A2M1	E2 LP3A2M1	E2 LP4A2M1	E2 LP1A2S0	E2 LP3A2S0	E2 LP4A2S0
	red	red	E2 LP1A3V1	E2 LP3A3V1	E2 LP4A3V1	E2 LP1A3M1	E2 LP3A3M1	E2 LP4A3M1	E2 LP1A3S0	E2 LP3A3S0	E2 LP4A3S0
	green	green	E2 LP1A4V1	E2 LP3A4V1	E2 LP4A4V1	E2 LP1A4M1	E2 LP3A4M1	E2 LP4A4M1	E2 LP1A4S0	E2 LP3A4S0	E2 LP4A4S0
	blue	blue	E2 LP1A6V1	E2 LP3A6V1	E2 LP4A6V1	E2 LP1A6M1	E2 LP3A6M1	E2 LP4A6M1	E2 LP1A6S0	E2 LP3A6S0	E2 LP4A6S0
	orange	orange	E2 LP1A8V1	E2 LP3A8V1	E2 LP4A8V1	E2 LP1A8M1	E2 LP3A8M1	E2 LP4A8M1	E2 LP1A8S0	E2 LP3A8S0	E2 LP4A8S0


We recommend to match the colour combination of the LEDs with the actuator colours.









LED colour	Available device colour	Base mounting						
		Screw connection			PUSH-IN spring-operated connection			
		Operating voltage						
		12 ... 30 Vac/dc	120 Vac	230 Vac	12 ... 30 Vac/dc	120 Vac	230 Vac	
	white	white / yellow	E2 LF1A2V1	E2 LF3A2V1	E2 LF4A2V1	E2 LF1A2M1	E2 LF3A2M1	E2 LF4A2M1
	red	red	E2 LF1A3V1	E2 LF3A3V1	E2 LF4A3V1	E2 LF1A3M1	E2 LF3A3M1	E2 LF4A3M1
	green	green	E2 LF1A4V1	E2 LF3A4V1	E2 LF4A4V1	E2 LF1A4M1	E2 LF3A4M1	E2 LF4A4M1
	blue	blue	E2 LF1A6V1	E2 LF3A6V1	E2 LF4A6V1	E2 LF1A6M1	E2 LF3A6M1	E2 LF4A6M1
	orange	orange	E2 LF1A8V1	E2 LF3A8V1	E2 LF4A8V1	E2 LF1A8M1	E2 LF3A8M1	E2 LF4A8M1







We recommend to match the colour combination of the LEDs with the actuator colours.







Protected contact blocks FR, FX, FK series





Technopolymer housing 
Protection degree IP67, IP69K

Ambient temperature: -25°C ... +80°C
Marks:      




Contact block	One M20 conduit entry
Slow action contacts 1NO+1NC	FR 6E2-M2  
Slow action contacts 2NC	FR 9E2-M2  
Slow action contacts 1NO+2NC	FR 20E2-M2  

Contact block	Two conduit entries M20
Slow action contacts 1NO+1NC	FX 6E2-M2  
Slow action contacts 2NC	FX 9E2-M2  
Slow action contacts 1NO+2NC	FX 20E2-M2  



Contact block	One M16 conduit entry
Slow action contacts 1NO+1NC	FK 33E2-M1  
Slow action contacts 2NC	FK 34E2-M1  

4P Housings

ES series housings

Self-extinguishing polycarbonate housing 
Protection degrees IP67 and IP69K
Ambient temperature: -40°C ... +80°C

4 x side cable entries + 2 x bottom entries
Marks:    



ES 31001

ES 31000


ES 32000

ES 33000

ES 34000












ES 36000

ES AC series housings

Self-extinguishing polycarbonate housing 
Protection degrees IP67 and IP69K
Ambient temperature: -25°C ... +70°C

4 x side cable entries + 2 x bottom entries
Marks:    



Actuator colour and engraving	Contacts	Flush button Black bezel	Projecting button Black bezel	Positions and engraving	Contacts	Black selector switch with 2 positions Black bezel
 green	Slow action contacts 1NO	ES AC31001	-		Slow action contacts 1NO	ES AC31019
 red	Slow action contacts 1NC	ES AC31002 	ES AC31017 		Slow action contacts 1NO	ES AC31044
 green	Slow action contacts 1NO	ES AC31015	-		Slow action contacts 2NO	ES AC31045
 red	Slow action contacts 1NC	ES AC31016 	ES AC31018 		Slow action contacts 2NO	ES AC31046



Contacts	Push-pull	Rotary release	Key release
Slow action contacts 1NC	ES AC31004	ES AC31003	ES AC31022
Slow action contacts 1NC self-monitored	ES AC31081	ES AC31082	ES AC31083
Slow action contacts 2NC	ES AC31009	ES AC31005	ES AC31023
Slow action contacts 1NO+1NC	ES AC31010	ES AC31006	ES AC31011
Slow action contacts 1NO+2NC	ES AC31146	ES AC31021	ES AC31024



Contacts	Push-pull with protection guard	Rotary release with protection guard	Key release with protection guard
Slow action contacts 1NC	ES AC31054	ES AC31238	ES AC31606
Slow action contacts 1NC self-monitored	ES AC31601	ES AC31605	ES AC31607
Slow action contacts 2NC	ES AC31602	ES AC31050	ES AC31092
Slow action contacts 1NO+1NC	ES AC31603	ES AC31056	ES AC31608
Slow action contacts 1NO+2NC	ES AC31604	ES AC31332	ES AC31609



Contacts	Emergency stop button Ø60 mm Push-pull	Emergency stop button Ø60 mm rotary release	Emergency stop button Ø60 mm key release
Slow action contacts 1NC	ES AC31843	ES AC31850	ES AC31847
Slow action contacts 1NC self-monitored	ES AC31844	ES AC31854	ES AC31846
Slow action contacts 2NC	ES AC31845	ES AC31853	ES AC31842
Slow action contacts 1NO+1NC	ES AC31848	ES AC31852	ES AC31841
Slow action contacts 1NO+2NC	ES AC31849	ES AC31851	ES AC31840



Contacts	Emergency stop button Push-Pull Yellow luminous disc, blinking Ø 60 mm, 24 Vac/dc, IP67	Emergency stop button, rotary release Yellow luminous disc, blinking Ø 60 mm, 24 Vac/dc, IP67	Emergency stop button, key release Yellow luminous disc, blinking Ø 60 mm, 24 Vac/dc, IP67
Slow action contacts 1NO+1NC + connection block	ES AC31430	ES AC31433	ES AC31436
Slow action contacts 1NO+1NC self-monitored + connection block	ES AC31431	ES AC31434	ES AC31437
Slow action contacts 1NO+2NC + connection block	ES AC31432	ES AC31435	ES AC31438



Contacts	Yellow housing with push-pull emergency-stop button and 24 Vdc yellow illuminated guard	Yellow housing with emergency-stop button with rotary release and 24 Vdc yellow illuminated guard
Slow action contacts 2NC+1NO and buzzer	ES AC31683	ES AC31763
Slow action contacts 2NC	ES AC31701	ES AC31764



Contacts	White housing with push-pull emergency stop button and 24 Vdc RGB illuminated guard	White housing with emergency stop button rotary release and 24 Vdc RGB illuminated guard
Slow action contacts 2NC+1NO and buzzer	ES AC31684	ES AC31762
Slow action contacts 2NC	ES AC31703	ES AC31759



Contacts	Housing featuring 3-position black selector switch with long handle, satin chrome bezel and 24 Vdc RGB illuminated guard	Housing featuring 3-position selector switch with key, satin chrome bezel and 24 Vdc RGB illuminated guard
1NO+1NO contacts and buzzer	ES AC31730	ES AC31732
1NO+1NO contacts	ES AC31731	ES AC31733



1NO	Upper button flush, white	1NO	Upper button flush, green	1NO	Upper button flush, green	1NO	Upper button flush, white	1NO	Upper button flush, white	1NO	Upper button flush, green
1NO	Lower button flush, black	1NC ⊕	Lower button projecting, red	1NC ⊕	Lower button projecting, red	1NC ⊕	Central button projecting, red	1NO	Central button flush, black	1NC ⊕	Central button projecting, red
						1NO	Lower button flush, black	1NC+1NO	Lower emergency stop button with illuminated disc, IP67	1NO	Lower button flush, green
ES AC31600		ES AC32010		ES AC32011		ES AC33017		ES AC34035		ES AC33016	



Positions and engraving	Contacts	Black key selector switch with 2 positions Black bezel
	Slow action contacts 1NO	ES AC31020
	Slow action contacts 2NO	ES AC31047

Legend: Maintained Spring-return Key extraction position

EA series housings


Self-extinguishing polycarbonate housing
 Protection degree IP65
 Ambient temperature: -40°C ... +80°C
 2 x side cable entries + 2 x bottom entries
 Marks:



EA AC series complete housings

Self-extinguishing polycarbonate housing
 Protection degree IP65
 Ambient temperature: -25°C ... +70°C
 2 x side cable entries + 2 x bottom entries
 Marks:

For a correct operation in compliance with standard EN ISO 13851, the two-hand controls must be connected to a CS DM••••• safety module for two-hand controls. See page 65.

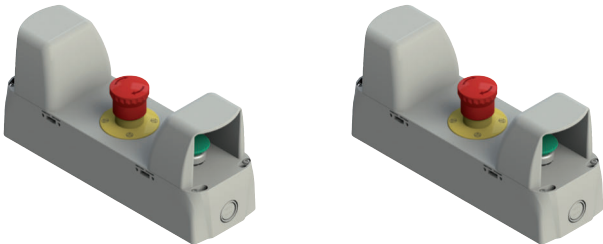

1NO	Mushroom button	1NO+1NC	Mushroom button
1NC ⊕	Emergency stop button Ø 40	2NC ⊕	Emergency stop button Ø 40
1NO	Mushroom button	1NO+1NC	Mushroom button
EA AC37040		EA AC37041	

VE GF121A	VE GF720A	VE CH121A1	VE GF151A	VE TF12H1700	VETF32H9700	VETF32H5700
Technopolymer fixing ring. Packs of 20 pcs.	Metal fixing ring. Packs of 20 pcs.	Technopolymer fixing key for VE GF fixing rings.	Adapter with ring for panel fixing for Ø 22 devices on Ø 30 holes. Packs of 10 pcs.	Black label for laser engraving, without engraving. Packs of 10 pcs.	Grey label for laser engraving, without engraving. Packs of 10 pcs.	Yellow label for laser engraving, without engraving. Packs of 10 pcs.

VE PT32A00A0	VE TR4A970	VE TR3A770	E2 1BAC11	E2 1BAC21	VE BC2PV1	VE BC2FV1
Label holder, for 18x27 mm label, without label. Packs of 10 pcs.	Label 18x27, without engraving, for cutter or laser engraving. Packs of 100 pcs.	Transparent protective plate 18x27 mm for VE PT label holders, thickness 0.4 mm, without engraving. Packs of 100 pcs.	3-slot mounting adapter for E2 CP contact blocks and E2 LP LED units. Packs of 10 pcs.	4-slot mounting adapter for E2 CP contact blocks. Packs of 10 pcs.	Panel mounting connection block. Packs of 10 pcs.	Connection block for base mounting. Packs of 10 pcs.

VE GP12H1A	VE GP12L1A	VE GP12M1A	VE CA1A1	VE CA1B1	VE CA1D1	VE CA1C1
Shaped ring for single device. Packs of 50 pcs.	Shaped ring for double and triple button. Packs of 50 pcs.	Shaped ring for quadruple button. Packs of 10 pcs.	Protection cap for flush buttons. Packs of 10 pcs.	Protection cap for projecting button. Packs of 10 pcs.	Protection cap for double flush button. Packs of 10 pcs.	Protection cap for double and triple projecting buttons. Packs of 10 pcs.

E2 1TA1A110	VE PR3A70	VE GP32F5A	VE GG3EA7A	VE GP32A5A	VE GP32B5A	VE GP32B1A
Black closing cap for Ø 22 mm holes. Packs of 10 pcs.	Transparent dust protection for E2 series panel mounting contact blocks. Packs of 50 pcs.	Rectangular open yellow protection guard complete with 4 screws 66x38 mm, 35 mm high.	Lockable protection guard complete with 4 screws (for panel thicknesses between 1 and 3.5 mm)	Cylindrical yellow protection guard with 4 windows Ø 40x20 mm.	Cylindrical yellow protection guard Ø 43x27 mm.	Cylindrical black protection guard Ø 43x27 mm.

VE GP32B4A	VE GP32B6A	VE AD3PF9A0	VE BD1PV1	VE BD1PM1	VE BD1FV1	VE BD1FM1
Cylindrical green protection guard Ø 43x27 mm.	Cylindrical blue protection guard Ø 43x27 mm.	Support with Ø 22 hole for mounting on DIN rail acc. to EN 60715. Packs of 10 pcs.	Contact block with diode, panel mounting, screw connection.	Contact block with diode, panel mounting, spring-operated connection.	Contact block with diode, base mounting, screw connection.	Contact block with diode, base mounting, spring-operated connection.

FD, FL, FC and FP series safety switches with separate actuator for heavy duty applications

Technopolymer housing (FP)
Metal housing (FD, FL, FC)
Protection degree IP67
Marks:

One M20x1.5 conduit entry

Three M20x1.5 conduit entries

One M20x1.5 conduit entry

One M20x1.5 conduit entry



Slow action contacts 1NO+1NC

FD 693-M2

FL 693-M2

FC 3393-M2

FP 693-M2

Slow action contacts 2NC

FD 993-M2

FL 993-M2

FC 3493-M2

FP 993-M2

Slow action contacts 1NO+2NC

FD 2093-M2

FL 2093-M2

/

FP 2093-M2

Separate actuators



VF KEYF

VF KEYF1

VF KEYF2

VF KEYF3

VF KEYF7

VF KEYF8

Attention! These separate actuators can be used only with items of the FD, FL, FC and FP series.

FR, FX, FK and FW series safety switches with separate actuator for standard applications

Technopolymer housing
Protection degree IP67
Marks:

One M20x1.5 conduit entry

Two conduit entries M20x1.5

One M16x1.5 conduit entry

Two conduit entries M20x1.5



Slow action contacts 1NO+1NC

FR 693-M2

FX 693-M2

FK 3393-M1

FW 3392-M2

Slow action contacts 2NC

FR 993-M2

FX 993-M2

FK 3493-M1

FW 3492-M2

Slow action contacts 1NO+2NC

FR 2093-M2

FX 2093-M2

/

FW 2092-M2

Separate actuators



VF KEYD

VF KEYD1

VF KEYD2

VF KEYD3

VF KEYD5

VF KEYD6

VF KEYD7

VF KEYD8

VF KEYD10

VF KEYD11

Attention! These separate actuators can be used only with items of the FR, FX, FK and FW series.

SR series magnetic safety sensors

Technopolymer housing
With 2 m cable or M8 connector
Protection degrees IP67 and IP69K
Marks:

With M8 connector

With M8 connector



2NC contacts (with closed guard)

SR BD40AN2-B02F

SR BD40ALK-B02F

SR AD40AN2-A01N

SR AD40ALK-A01N

Actuation distance

8 mm

8 mm

5 mm

5 mm



For safety applications, connect with the safety modules shown on the side. See technical data on page 64.

CS AR-01●●●●^b CS AR-46●024 CS AT-3●●●●●
CS AR-02●●●●^b CS AR-91●●●● CS FS-5●●●●●
CS AR-04●●●●^b CS AR-94●●●● CS MP●●●●●
CS AR-05●●●● CS AR-95●●●● CS MF●●●●●
CS AR-06●●●● CS AT-0●●●●●
CS AR-08●●●● CS AT-1●●●●●

^b Compatible with modules with production batch later than 06/2014 only.



ST G - ST H series RFID safety sensors

Technopolymer housing
Versions with a magnetic holding force
With 2 m cable or M12 connector
Protection degrees IP67 and IP69K

Actuator with high coding level
(EN ISO 14119)
Multitag programming
Status LED

Supply voltage: 24 Vdc
Marks:

Output with PVC cable

Output with PUR cable

Output with M12
technopolymer connector

Output with M12
stainless steel connector

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-



ST GD210N2-G1T
ST GD310N2-G1T
ST GD420N2-G1T
ST GD510N2-G1T

ST GD210H2-G1T
ST GD310H2-G1T
ST GD420H2-G1T
ST GD510H2-G1T

ST GD210MP-G1T
ST GD310MP-G1T
ST GD420MP-G1T
ST GD510MP-G1T

ST GD210MK-G1T
ST GD310MK-G1T
ST GD420MK-G1T
ST GD510MK-G1T

Actuation distance

11 mm

11 mm

11 mm

11 mm

Output with 0.2 m cable length and M12 connector

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-



ST GD210M0.2-G1T
ST GD310M0.2-G1T
ST GD420M0.2-G1T
ST GD510M0.2-G1T

Actuation distance

11 mm

Output with PVC cable

Output with PUR cable

Output with M12
technopolymer connector

Output with M12
stainless steel connector

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-



ST GD210N2-L1T
ST GD310N2-L1T
ST GD420N2-L1T
ST GD510N2-L1T

ST GD210H2-L1T
ST GD310H2-L1T
ST GD420H2-L1T
ST GD510H2-L1T

ST GD210MP-L1T
ST GD310MP-L1T
ST GD420MP-L1T
ST GD510MP-L1T

ST GD210MK-L1T
ST GD310MK-L1T
ST GD420MK-L1T
ST GD510MK-L1T

Actuation distance

11 mm

11 mm

11 mm

11 mm

Output with PVC cable

Output with PUR cable

Output with M12
technopolymer connector

Output with M12
stainless steel connector

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-



ST GD210N2-E1T
ST GD310N2-E1T
ST GD420N2-E1T
ST GD510N2-E1T

ST GD210H2-E1T
ST GD310H2-E1T
ST GD420H2-E1T
ST GD510H2-E1T

ST GD210MP-E1T
ST GD310MP-E1T
ST GD420MP-E1T
ST GD510MP-E1T

ST GD210MK-E1T
ST GD310MK-E1T
ST GD420MK-E1T
ST GD510MK-E1T

Actuation distance

18 mm

18 mm

18 mm

18 mm



For safety applications, connect with the safety modules shown on the side. See technical data on page 64.

CS AR-01•024 CS AT-1••024
CS AR-02•024 CS MF•••••
CS AR-05•024 CS MP•••••
CS AR-06•024
CS AR-08•024
CS AT-0••024



With permanent magnet

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-
Actuation distance					

Holding force 25 N



Holding force 40 N



ST HE210MP-H1TE	ST HE210MP-H1TF
ST HE310MP-H1TE	ST HE310MP-H1TF
ST HE420MP-H1TE	ST HE420MP-H1TF
ST HE510MP-H1TE	ST HE510MP-H1TF
11 mm	11 mm



Extended temperature range

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	2	1	-	●
Actuation distance					

Output with M12 stainless steel connector



ST GD420MK-G1T-T8
11 mm

Output with M12 stainless steel connector
With permanent magnet
Holding force 25 N



ST HE420MK-H1TE-T8
11 mm

Output with M12 stainless steel connector
With permanent magnet
Holding force 40 N



ST HE420MK-H1TF-T8
11 mm

Multitag programming

OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	2	-	-	-
Actuation distance					

Two actuators
TAG 0 activates OS, TAG 1 activates O



ST GD330MP-P1
11 mm

Two actuators
Each TAG activates OS and sends the TAG no.



ST GD330MP-P2
11 mm

Three actuators
Each TAG activates OS and sends the TAG no.



ST GD330MP-P3
11 mm

Four actuators
Each TAG activates OS and sends the TAG no.



ST GD330MP-P4
11 mm

ST D series
RFID safety sensors

Technopolymer housing
With 2 m cable or M12 connector
Actuator with high coding level (EN ISO 14119)
Protection degrees IP67 and IP69K

Status LED
Supply voltage: 24 Vdc
Marks: CE c UL us TR ENEC ECOLAB UK

Cable at the right



Cable at the left



M12 connector, at the right



M12 connector, at the left



OS safety outputs	O signalling outputs	IS safety inputs	I programming inputs	EDM inputs	Programmable
2	1	-	-	-	-
2	1	2	-	-	-
2	1	2	1	-	●
2	1	2	-	1	-
Actuation distance					

ST DD210N2-D1T	ST DL210N2-D1T	ST DD210MK-D1T	ST DL210MK-D1T
ST DD310N2-D1T	ST DL310N2-D1T	ST DD310MK-D1T	ST DL310MK-D1T
ST DD420N2-D1T	ST DL420N2-D1T	ST DD420MK-D1T	ST DL420MK-D1T
ST DD510N2-D1T	ST DL510N2-D1T	ST DD510MK-D1T	ST DL510MK-D1T
12 mm	12 mm	12 mm	12 mm



For safety applications, connect with the safety modules shown on the side. See technical data on page 64.

CS AR-01•024 CS MF•••••
CS AR-02•024 CS MP•••••
CS AR-05•024
CS AR-06•024
CS AR-08•024



HP AA series hinge switches

Metal housing
With 2 m cable or M12 connector
Protection degrees IP67 and IP69K

Marks:

Slow action contacts 1NO+2NC



HP AB series hinge switches

Metal housing
With 2 m cable or M12 connector
Protection degrees IP67 and IP69K

Marks:

Slow action contacts 1NO+2NC



HX series hinge switches

AISI 316L stainless steel housing
With 2 m cable or M12 connector
Protection degrees IP67 and IP69K

Marks:

Slow action contacts 2NO+2NC



HX series electronic hinge switches

AISI 316L stainless steel housing
With 2 m cable or M12 connector
Protection degrees IP67 and IP69K
Status LED

Supply voltage: 24 Vdc
Marks:

PNP switching outputs



For safety applications, the HX series electronic hinge switches must be connected to modules with OSSD inputs. Shown on the side are the compatible Pizzato modules.
See technical data on page 64


CS AR-01•024
CS AR-02•024
CS AR-05•024
CS AR-06•024
CS AR-08•024
CS AT-0•024
CS AT-1•024
CS MP•••••
CS MF•••••

Switches for hinges FD, FL and FC series FR, FX, FK, FM series

Technopolymer housing or metal housing
One, two or three conduit entries
Protection degree IP67

Marks:

Slow action contacts 1NO+1NC
Slow action contacts 2NC
Slow action contacts 1NO+2NC

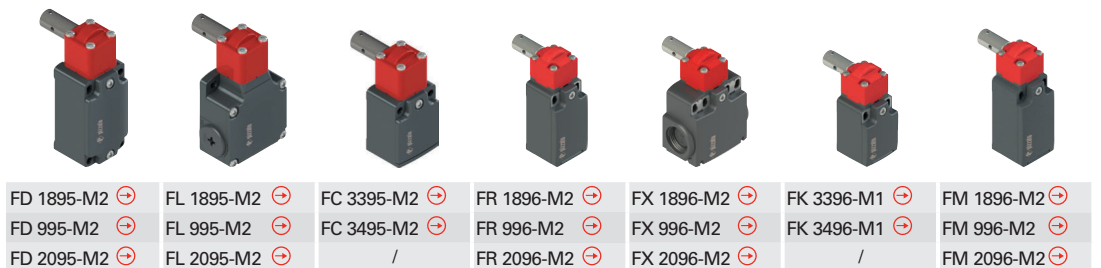


FR, FX, FM series switches with slotted hole lever





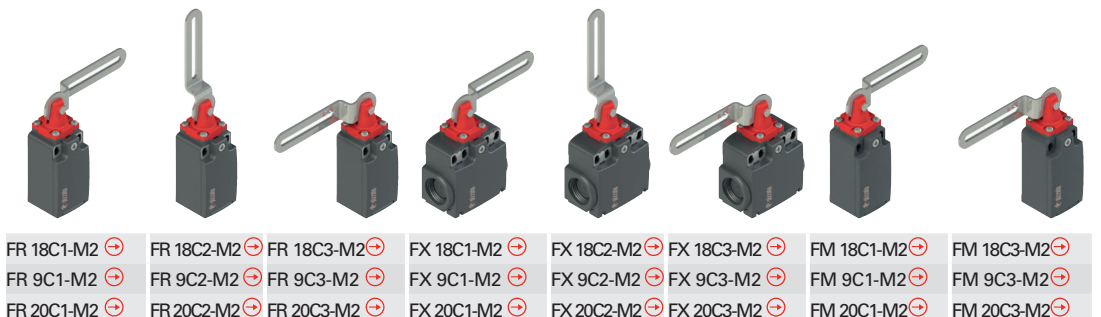


Technopolymer housing or metal housing
One or two conduit entries M20x1.5
Protection degree IP67

Marks:

Slow action contacts 1NO+1NC
Slow action contacts 2NC
Slow action contacts 1NO+2NC






FS series locking switches

Technopolymer housing 
 Three M20x1.5 conduit entries
 Max. holding force: 1100 N
 (with key release): 900 N
 Protection degree IP67
 Marks:      

1NO+1NC contacts (magnet)
1NO+2NC contacts (magnet)
1NO+1NC contacts (magnet) +1NC (actuator)




Locked actuator with **de-energised** 24 Vac/dc solenoid.



FS 1896D024-M2 
FS 2096D024-M2 
FS 2896D024-M2 




Locked actuator with **de-energised** 24 Vac/dc solenoid. With auxiliary key release.










FS 1898D024-M2 
FS 2098D024-M2 
FS 2898D024-M2 

Locked actuator with **energised** 24 Vac/dc solenoid.



FS 1896E024-M2 
FS 2096E024-M2 
FS 2896E024-M2 




FD, FP series locking switches

Technopolymer housing (FP) 
 Metal housing (FD)
 One M20x1.5 conduit entry
 Max. holding force: 1000 N
 Protection degree IP67
 Marks:      

Slow action contacts 1NO+1NC
Slow action contacts 2NC
Slow action contacts 1NO+2NC




With timed (20 s) manual actuator **lock/release**



FD 6R2-M2 
FD 9R2-M2 
FD 20R2-M2 




With timed (20 s) manual actuator **lock/release**



FP 6R2-M2 
FP 9R2-M2 
FP 20R2-M2 



With timed (10 s) manual actuator **lock/release**



FD 6R2-L10M2 
FD 9R2-L10M2 
FD 20R2-L10M2 



With **key release**



FD 1899-M2 
/
FD 2099-M2 

With **key release**



FP 1899-M2 
/
FP 2099-M2 

Separate actuators for FD, FP, FS series



VF KEYF



VF KEYF1



VF KEYF2



VF KEYF3



VF KEYF7



VF KEYF8

Attention! These separate actuators cannot be used with items of the FG, FY series.

Lock-out device



Padlockable lock-out device to prevent the actuator entry and the accidental closing of the door behind operators while they are in the danger area.

Article	Description
VF KB1	Lock-out device for FD, FP, FS series
VF KB2	Lock-out device for FG, FY series





FG series locking switches

Metal housing
 4 switching contacts
 Max. holding force: 3000 N
 Protection degree IP67
 Status LED
 Three M20x1.5 conduit entries
 Marks:

Locked actuator with **de-energised** 24 Vac/dc solenoid.



FG 60AD1D0A

Locked actuator with **energised** 24 Vac/dc solenoid.



FG 60AD1E0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release.



FG 60AD5D0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release and escape release button.



FG 60AD6D0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With escape release button.



FG 60AD7D0A

1NO+1NC contacts (magnet) + 1NO+1NC (actuator)

2NC contacts (magnet) + 1NO+1NC (actuator)

3NC contacts (magnet) + 1NC (actuator)

FY series locking switches

Technopolymer housing
 4 switching contacts
 Max. holding force: 2800 N
 Protection degrees IP67 and IP69K
 Status LED
 Three M20x1.5 conduit entries
 Marks:

Locked actuator with **de-energised** 24 Vac/dc solenoid.



FY 60AD1D0A

Locked actuator with **energised** 24 Vac/dc solenoid.



FY 60AD1E0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release.



FY 60AD5D0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release and escape release button.



FY 60AD6D0A

Locked actuator with **de-energised** 24 Vac/dc solenoid. With escape release button.



FY 60AD7D0A

1NO+1NC contacts (magnet) + 1NO+1NC (actuator)

2NC contacts (magnet) + 1NO+1NC (actuator)

3NC contacts (magnet) + 1NC (actuator)

FY series locking switches with integrated control devices

Technopolymer housing
 4 switching contacts
 Max. holding force: 2800 N
 Protection degree IP65
 Status LED
 Three M20x1.5 conduit entries
 Marks:

Locked actuator with **de-energised** 24 Vac/dc solenoid.



FY 60AD1D0A-N01

Locked actuator with **energised** 24 Vac/dc solenoid.



FY 60AD1E0A-N03

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release.



FY 60AD5D0A-N06

Locked actuator with **de-energised** 24 Vac/dc solenoid. With key release and escape release button.



FY 60AD6D0A-N07

Locked actuator with **de-energised** 24 Vac/dc solenoid. With escape release button.



FY 60AD7D0A-N10

1NO+1NC contacts (magnet) + 1NO+1NC (actuator)

2NC contacts (magnet) + 1NO+1NC (actuator)

3NC contacts (magnet) + 1NC (actuator)

Separate actuators for FG and FY series




VF KEYF20



VF KEYF21



VF KEYF22



VF KEYF28

Attention! These separate actuators cannot be used with items of the FD, FP, FS series.

RFID safety switches with lock NG series

Metal housing, three M20x1.5 conduit entries

Actuator with high coding level (EN ISO 14119)

Max. holding force: 9750 N

Protection degrees IP67 and IP69K

Status LED


Marks:



Locked actuator with **de-energised 24 Vdc solenoid.**



Locked actuator with **energised 24 Vdc solenoid.**



Locked actuator with **de-energised 24 Vdc solenoid. With key release.**



Locked actuator with **de-energised 24 Vdc solenoid. With key release and escape release button.**



Locked actuator with **de-energised 24 Vdc solenoid. With escape release button.**



Mode 1

OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2

OS1/OS2 safety outputs active with inserted actuator

Mode 3

OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NG 2D1D411A-F31

NG 2D1E411A-F31

NG 2D5D411A-F31

NG 2D6D411A-F31

NG 2D7D411A-F31

NG 2D1D421A-F31

NG 2D1E421A-F31

NG 2D5D421A-F31

NG 2D6D421A-F31

NG 2D7D421A-F31

NG 2D1D431A-F31

NG 2D1E431A-F31

NG 2D5D431A-F31

NG 2D6D431A-F31

NG 2D7D431A-F31

RFID safety switches with lock NG series with integrated control devices

Metal housing, three M20x1.5 conduit entries

Actuator with high coding level (EN ISO 14119)

Max. holding force: 9750 N


Protection degree IP65

Status LED


Marks:




Locked actuator with **de-energised 24 Vdc solenoid.**



Locked actuator with **energised 24 Vdc solenoid.**




Locked actuator with **de-energised 24 Vdc solenoid. With key release.**



Locked actuator with **de-energised 24 Vdc solenoid. With key release and escape release button.**



Locked actuator with **de-energised 24 Vdc solenoid. With key release, escape release button and guard.**



Mode 1

OS1/OS2 safety outputs active with inserted and locked actuator

NG 2D1D412D-F31

NG 2D1E411H-F31

NG 2D5D411D-F31

NG 2D6D412P-F31

NG 2D6D41CF-F31

RFID safety switches with lock NG series with remote escape release

Self-monitoring of cable tension

Device can be turned in 90° steps

Flexible installation

Activation button for remote escape release

Marks:



Note:The codes shown on the side include the safety switch supplied with the remote release cable which has a standard length of 5 meters. For other lengths, please contact our Technical Department.

The remote escape release switch must be supplemented with the push button with the code VN RR-K4.

Locked actuator with **de-energised 24 Vdc solenoid. With remote escape release.**



NG 2D9D411A-F31

NG 2D9D421A-F31

NG 2D9D431A-F31

Activation button for remote escape release

Article	Description
VN RR-K4	Activation button for remote escape release on NG and NS series switches

Note: The actuation cable is integrated in the remote release device connected to the safety switch.

Inputs and outputs

- 2 safety inputs IS1, IS2
- 2 safety outputs OS1, OS2
- 1 signalling output O3: closed guard
- 1 signalling output O4: locked guard
- 1 solenoid activation input I4
- 1 programming / reset input I3




For safety applications, connect with the safety modules shown on the side. See technical data on page 64.

- CS AR-01•024
- CS AR-02•024
- CS AR-05•024
- CS AR-06•024
- CS AR-08•024
- CS AT-0•024
- CS AT-1•024
- CS MP•024
- CS MF•024



RFID safety switches with lock NS series

Technopolymer housing
 Actuator with high coding level (EN ISO 14119)
 Max. holding force: 2100 N
 Protection degrees IP67 and IP69K
 Status LED
 Marks:

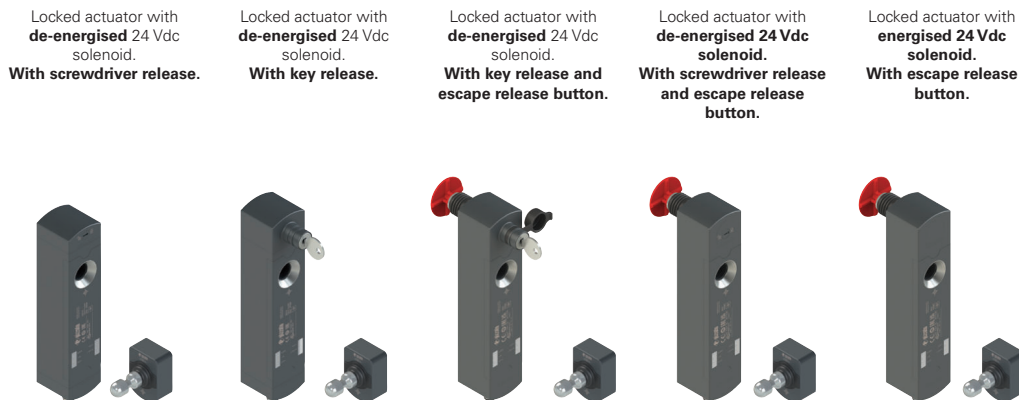


With M12 connector, axial

Mode 1 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2 OS1/OS2 safety outputs active with inserted actuator

Mode 3 OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NS D4AZ1SMK-F41	NS D4ST1SMK-F41	NS D4SE1SMK-F41	NS D4CE1SMK-F41	NS E4TE1SMK-F41
NS G4AZ1SMK-F41	NS G4ST1SMK-F41	NS G4SE1SMK-F41	NS G4CE1SMK-F41	NS H4TE1SMK-F41
NS L4AZ1SMK-F41	NS L4ST1SMK-F41	NS L4SE1SMK-F41	NS L4CE1SMK-F41	NS M4TE1SMK-F41

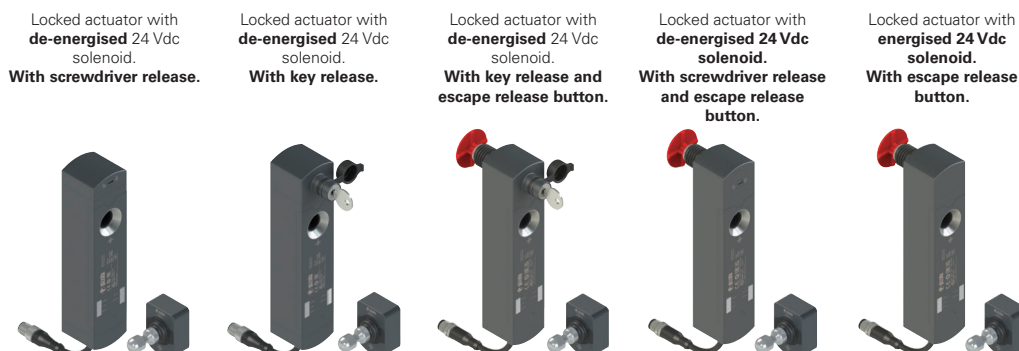

With axial cable, 0.2 m length and M12 connector

Mode 1 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2 OS1/OS2 safety outputs active with inserted actuator


Mode 3 OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NS D4AZ1SM0.2-F41	NS D4ST1SM0.2-F41	NS D4SE1SM0.2-F41	NS D4CE1SM0.2-F41	NS E4TE1SM0.2-F41
NS G4AZ1SM0.2-F41	NS G4ST1SM0.2-F41	NS G4SE1SM0.2-F41	NS G4CE1SM0.2-F41	NS H4TE1SM0.2-F41
NS L4AZ1SM0.2-F41	NS L4ST1SM0.2-F41	NS L4SE1SM0.2-F41	NS L4CE1SM0.2-F41	NS M4TE1SM0.2-F41

To order a product with lateral output direction, replace S with D in the codes shown above.
 Example: NS D4AZ1SM0.2-F41 → NS D4AZ1DM0.2-F41

RFID safety switches with lock NS series with integrated control devices

Technopolymer housing
 Actuator with high coding level (EN ISO 14119)
 Max. holding force: 2100 N
 Protection degree IP65
 Versions with 1 or 2 devices
 Status LED
 Marks:

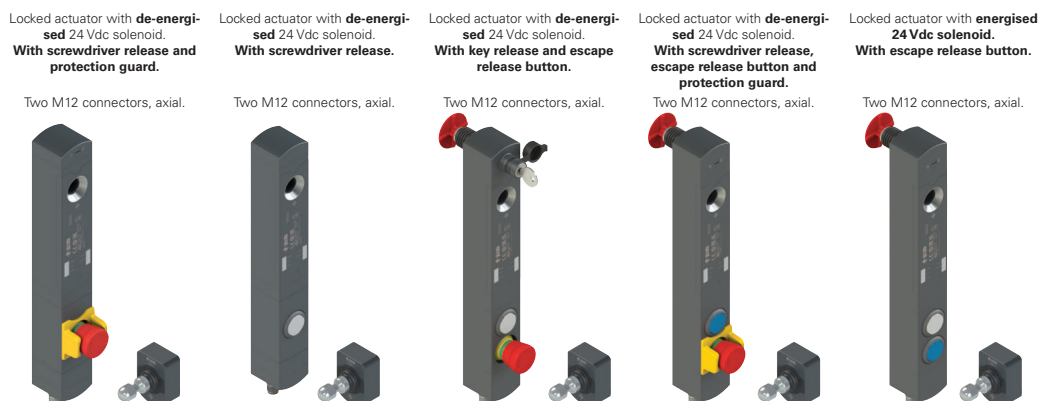

Mode 1 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2 OS1/OS2 safety outputs active with inserted actuator

Mode 3 OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NS D4AZ1SRK-F41N187	NS D4ST1SRK-F41N111	NS D4SE1SRK-F41N113	NS D4CE1SRK-F41N243	NS E4TE1SRK-F41N115
NS G4AZ1SRK-F41N187	NS G4ST1SRK-F41N111	NS G4SE1SRK-F41N113	NS G4CE1SRK-F41N243	NS H4TE1SRK-F41N115
NS L4AZ1SRK-F41N187	NS L4ST1SRK-F41N111	NS L4SE1SRK-F41N113	NS L4CE1SRK-F41N243	NS M4TE1SRK-F41N115

RFID safety switches with lock NS series with integrated control devices

Technopolymer housing
 Actuator with high coding level (EN ISO 14119)
 Max. holding force: 2100 N
 Protection degree IP65
 Versions with 3 or 4 devices
 Status LED

Marks:

Locked actuator with de-energised 24 Vdc solenoid. With screwdriver release.

Two M12 connectors, axial.



Locked actuator with de-energised 24 Vdc solenoid. With key release and protection guard.

Two M12 connectors, axial.



Locked actuator with de-energised 24 Vdc solenoid. With key release and escape release button.

M23 connector, axial.



Locked actuator with de-energised 24 Vdc solenoid. With screwdriver release and escape release button.

Two M12 connectors, axial.



Locked actuator with energised 24 Vdc solenoid. With escape release button and protection guard.

Two M12 connectors, axial.



Mode 1 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2 OS1/OS2 safety outputs active with inserted actuator

Mode 3 OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NS D4AZ1SRK-F41N001	NS D4ST1SRK-F41N193	NS D4SE1STK-F41N003	NS D4CE1SRK-F41N004	NS E4TE1SRK-F41N242
NS G4AZ1SRK-F41N001	NS G4ST1SRK-F41N193	NS G4SE1STK-F41N003	NS G4CE1SRK-F41N004	NS H4TE1SRK-F41N242
NS L4AZ1SRK-F41N001	NS L4ST1SRK-F41N193	NS L4SE1STK-F41N003	NS L4CE1SRK-F41N004	NS M4TE1SRK-F41N242

RFID safety switches with lock NS series with remote escape release

Self-monitoring of cable tension
 Device can be turned in 90° steps
 Flexible installation
 Activation button for remote escape release

Marks:

Note: The codes shown on the side include the safety switch supplied with the remote release cable which has a standard length of 5 meters. For other lengths, please contact our Technical Department.

The remote escape release switch must be supplemented with the push button with the code VN RR-K4.

Locked actuator with de-energised 24 Vdc solenoid. With key release and remote escape release.



Locked actuator with de-energised 24 Vdc solenoid. With screwdriver release and remote escape release.



Mode 1 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2 OS1/OS2 safety outputs active with inserted actuator

Mode 3 OS1 safety output active with inserted and locked actuator, OS2 safety output active with inserted actuator

NS D4SR1SMK-F41	NS D4CR1SMK-F41
NS G4SR1SMK-F41	NS G4CR1SMK-F41
NS L4SR1SMK-F41	NS L4CR1SMK-F41

Activation button for remote escape release

Article	Description
VN RR-K4	Activation button for remote escape release on NG and NS series switches

Note: The actuation cable is integrated in the remote release device connected to the safety switch.

Inputs and outputs

- 2 safety inputs IS1, IS2
- 2 safety outputs OS1, OS2
- 1 signalling output O3: closed guard
- 1 signalling output O4: locked guard
- 2 solenoid activation inputs IE1, IE2
- 1 programming / reset input I3



For safety applications, connect with the safety modules shown on the side. See technical data on page 64.

- CS AR-01•024
- CS AR-02•024
- CS AR-05•024
- CS AR-06•024
- CS AR-08•024
- CS AT-0••024
- CS AT-1••024
- CS MP•••••
- CS MF•••••

NX series
RFID safety switches with lock

Compact dimensions: 30 x 30 x 94,5 mm

Technopolymer housing, metal head
Metal actuator with high coding level
(EN ISO 14119)

Max. holding force: 6000 N

Bistable operation

Protection degrees IP67 and IP69K

Status signalling RGB LED

Marks:


With M12 connector, axial

Mode 1
OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
OS1/OS2 safety outputs active with inserted actuator


Inputs
2 safety inputs IS1, IS2
2 solenoid activation inputs IE1, IE2
1 programming / reset input I3

Outputs
2 safety outputs OS1, OS2
1 signalling output O3: closed guard
1 signalling output O4: locked guard

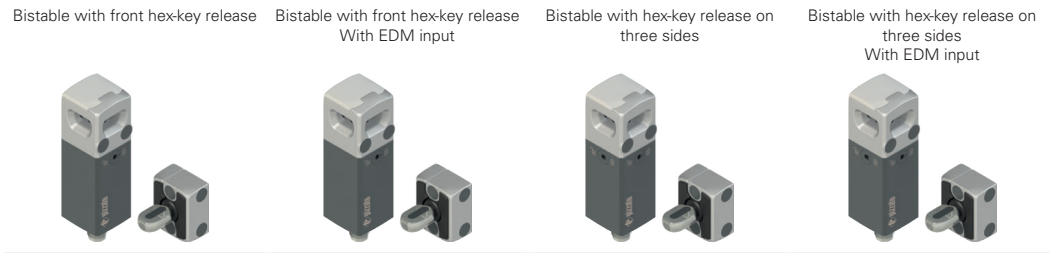

NX B42AZ1SMK-F61	NX B52AZ1SMK-F61	NX B42CZ1SMK-F61	NX B52CZ1SMK-F61
NX P42AZ1SMK-F61	NX P52AZ1SMK-F61	NX P42CZ1SMK-F61	NX P52CZ1SMK-F61

Bistable with hexagonal key release at front and escape release button at back
Bistable with hexagonal key at front and escape release button at back With EDM input
Bistable with hexagonal key release on three sides and escape release button at back
Bistable with hexagonal key release on three sides and escape release button at back With EDM input

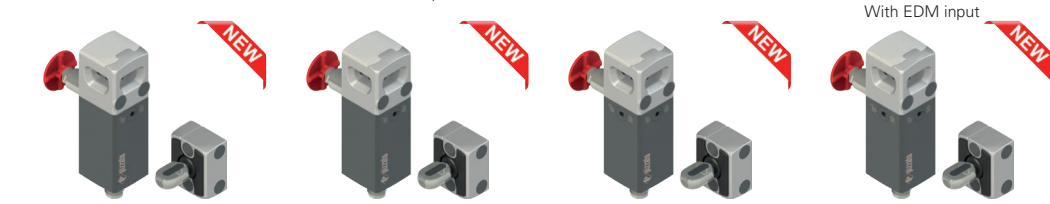


NX B42AE1SMK-F61	NX B52AE1SMK-F61	NX B42CE1SMK-F61	NX B52CE1SMK-F61
NX P42AE1SMK-F61	NX P52AE1SMK-F61	NX P42CE1SMK-F61	NX P52CE1SMK-F61

With M12 connector, axial

Mode 1
OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
OS1/OS2 safety outputs active with inserted actuator

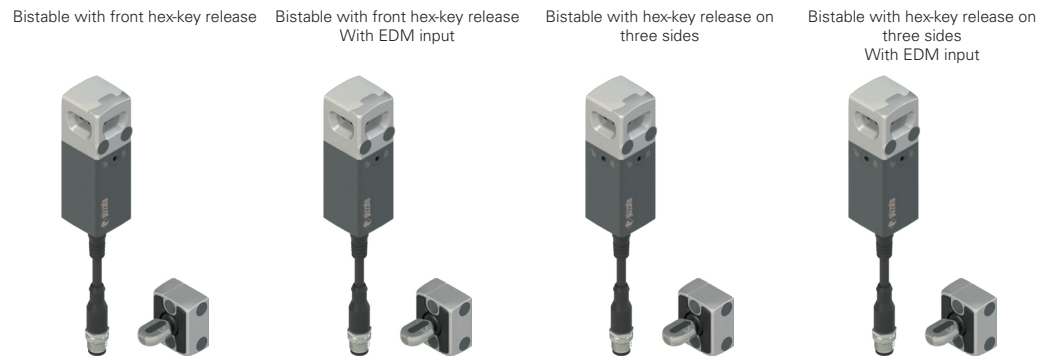


NX B42AZ1SM0.2-F61	NX B52AZ1SM0.2-F61	NX B42CZ1SM0.2-F61	NX B52CZ1SM0.2-F61
NX P42AZ1SM0.2-F61	NX P52AZ1SM0.2-F61	NX P42CZ1SM0.2-F61	NX P52CZ1SM0.2-F61

With axial cable, 0.2 m length and M12 connector

Mode 1
OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
OS1/OS2 safety outputs active with inserted actuator

Bistable with hexagonal key release at front and escape release button at back
Bistable with hexagonal key at front and escape release button at back With EDM input
Bistable with hexagonal key release on three sides and escape release button at back
Bistable with hexagonal key release on three sides and escape release button at back With EDM input

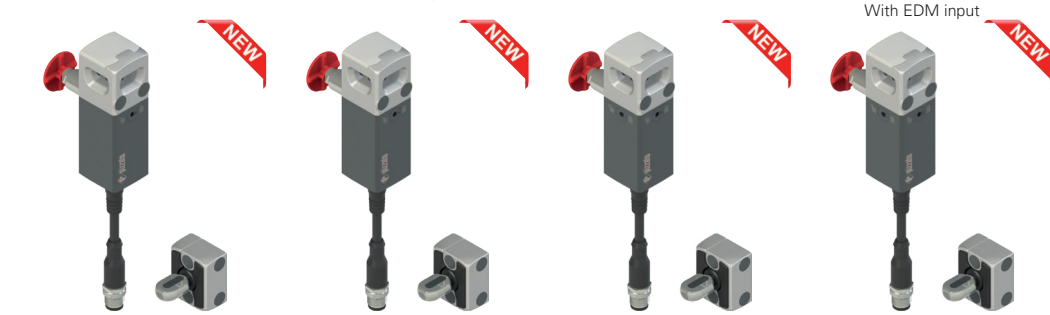

NX B42AE1SM0.2-F61	NX B52AE1SM0.2-F61	NX B42CE1SM0.2-F61	NX B52CE1SM0.2-F61
NX P42AE1SM0.2-F61	NX P52AE1SM0.2-F61	NX P42CE1SM0.2-F61	NX P52CE1SM0.2-F61

With axial cable, 0.2 m length and M12 connector

Mode 1
OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
OS1/OS2 safety outputs active with inserted actuator

NX series RFID safety switches in stainless steel with lock



Compact dimensions: 30 x 30 x 94,5 mm
 Technopolymer housing, external metal parts in AISI 316L stainless steel
 Actuator with high coding level and metal parts in AISI 316L stainless steel
 Max. holding force: 6000 N
 Bistable operation
 Protection degrees IP67 and IP69K
 Status signalling RGB LED

Marks:

With M12 connector, axial

Mode 1
 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
 OS1/OS2 safety outputs active with inserted actuator

Inputs

2 safety inputs IS1, IS2
 2 solenoid activation inputs IE1, IE2
 1 programming / reset input I3

Outputs

2 safety outputs OS1, OS2
 1 signalling output O3: closed guard
 1 signalling output O4: locked guard

Bistable with front hex-key release



NX B42AZ2SMK-F71

Bistable with front hex-key release
 With EDM input



NX B52AZ2SMK-F71

Bistable with hex-key release on three sides



NX B42CZ2SMK-F71

Bistable with hex-key release on three sides
 With EDM input



NX B52CZ2SMK-F71

Bistable with hexagonal key release at front and escape release button at back



NX B42AE2SMK-F71

Bistable with hexagonal key at front and escape release button at back
 With EDM input



NX B52AE2SMK-F71

Bistable with hexagonal key release on three sides and escape release button at back



NX B42CE2SMK-F71

Bistable with hexagonal key release on three sides and escape release button at back
 With EDM input



NX B52CE2SMK-F71

With M12 connector, axial

Mode 1
 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
 OS1/OS2 safety outputs active with inserted actuator

Bistable with front hex-key release



NX B42AZ2SM0.2-F71

Bistable with front hex-key release
 With EDM input



NX B52AZ2SM0.2-F71

Bistable with hex-key release on three sides



NX B42CZ2SM0.2-F71

Bistable with hex-key release on three sides
 With EDM input



NX B52CZ2SM0.2-F71

With axial cable, 0.2 m length and M12 connector

Mode 1
 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
 OS1/OS2 safety outputs active with inserted actuator

Bistable with hexagonal key release at front and escape release button at back



NX B42AE2SM0.2-F71

Bistable with hexagonal key at front and escape release button at back
 With EDM input



NX B52AE2SM0.2-F71

Bistable with hexagonal key release on three sides and escape release button at back



NX B42CE2SM0.2-F71

Bistable with hexagonal key release on three sides and escape release button at back
 With EDM input



NX B52CE2SM0.2-F71

With axial cable, 0.2 m length and M12 connector

Mode 1
 OS1/OS2 safety outputs active with inserted and locked actuator

Mode 2
 OS1/OS2 safety outputs active with inserted actuator

Fixing brackets for NX switches

NEW



AP X010



AP X011



AP X012



AP X020



AP X021



AP X022



AP X023






For safety applications, connect with the safety modules shown on the side.
See technical data on page 64.

CS AR-01•024
CS AR-02•024
CS AR-05•024
CS AR-06•024
CS AR-08•024
CS AT-0••024
CS AT-1••024
CS MP•••••
CS MF•••••

BN series control device units

Technopolymer housing
Adjustable mounting holes
Versions with 1, 2, 3, 4, 6, 7 or 8 devices

Protection degree IP65
Supply voltage: 24 Vdc
Marks:   

1 device
M12 connector
5-pole



BN AC1ZA01

1 device
M12 connector
5-pole




BN AC1ZA02

1 device
M12 connector
5-pole



BN AC1ZA03

1 device
M12 connector
5-pole



BN AC1ZA12

2 devices
M12 connector,
8-pole



BN AC2ZA01

2 devices
M12 connector,
8-pole



BN AC2ZA02

2 devices
M12 connector,
8-pole



BN AC2ZA03

2 devices
M12 connector,
8-pole



BN AC2ZA26

3 devices
M12 connector, 12-pole



BN AC3ZA01

3 devices
M12 connector, 12-pole



BN AC3ZA02

3 devices
M12 connector, 12-pole



BN AC3ZA03

3 devices
M12 connector, 12-pole



BN AC3ZB59

4 devices
M12 connector, 12-pole



BN AC4ZA01

4 devices
M12 connector, 12-pole



BN AC4ZA02

4 devices
M23 connector, 12-pole




BN AC4ZA03

4 devices
M12 connector, 12-pole



BN AC4ZB19

6 devices
2x M12 connector, 12-pole




BN AC6ZA01

6 devices
M23 connector, 19-pole



BN AC6ZA02

6 devices
2x M12 connector, 12-pole




BN AC6ZA40

7 devices
2x M12 connector, 12-pole




BN AC7ZA01

7 devices
2x M12 connector, 12-pole



BN AC7ZA07

8 devices
2x M12 connector, 12-pole






BN AC8ZA01

Lenses for VN NG-AC series buttons**
For the table listing available lenses, see page 76



**BN series
IO-Link control device units**

Two types of control devices available: illuminated RGB button, spring-return, and illuminated selector switch
3 and 6-device versions

Protection degree IP65
Supply voltage: 24 Vdc
Marks:   

3 devices
M12 connector, 4-pole



BN AC3EA08

3 devices
Two M12 connectors, 4-pole, and guard



BN AC3EA09

3 devices
Two M12 connectors, 4-pole, and guard



BN AC3EA10

3 devices
M12 connector, 4-pole



BN AC3EA13

3 devices
M12 connector, 4-pole



BN AC3EA14

4 devices
Two M12 connectors, 4-pole and guard



BN AC4EA01

4 devices
M12 connector, 4-pole



BN AC4EA02

4 devices
Two M12 connectors, 4-pole and guard



BN AC4EA03

4 devices
Two M12 connectors, 4-pole and guard



BN AC4EA04

4 devices
Two M12 connectors, 4-pole and guard




BN AC4EA05

4 devices
Two M12 connectors, 4-pole and guard




BN AC4EA06

6 devices
Two M12 connectors, 4-pole and guard



BN AC6EA07

6 devices
Two M12 connectors, 4-pole and guard




BN AC6EA08

6 devices
M12 connector, 4-pole



BN AC6EA09

6 devices
Two M12 connectors, 4-pole and guard



BN AC6EA10

7 devices
Two M12 connectors, 4-pole and guard



BN AC7EA01

7 devices
M12 connector, 4-pole



BN AC7EA02

7 devices
Two M12 connectors, 4-pole and guard



BN AC7EA03

7 devices
Two M12 connectors, 4-pole and guard




BN AC7EA04

7 devices
Two M12 connectors, 4-pole and guard




BN AC7EA05

7 devices
Two M12 connectors, 4-pole and guard




BN AC7EA06

8 devices
Two M12 connectors, 4-pole and guard



BN AC8EA01

8 devices
M12 connector, 4-pole



BN AC8EA02

8 devices
Two M12 connectors, 4-pole and guard



BN AC8EA03

8 devices
Two M12 connectors, 4-pole and guard



BN AC8EA04

8 devices
Two M12 connectors, 4-pole and guard



BN AC8EA05

8 devices
Two M12 connectors, 4-pole and guard



BN AC8EA06

P-KUBE 1 safety handles

Can be used with switches from the FD, FG and FY series

Self-centring metal pin

Integrated padlockable lock-out device

Thanks to the slotted brackets the handle can be adjusted on 3 different axes

Suitable for use with hinged and sliding doors, either with right or left closing


Switch and actuator not included in scope of delivery

For FG, FY series switches



VF AP-P11B-200P

For FD series switches



VF AP-P11A-200P

P-KUBE 2 safety handles

Can be used with switches from the NG series


Thanks to the slotted brackets the handle can be adjusted on 3 different axes

Suitable for use with hinged and sliding doors, either with right or left closing

Optional lock-out device

Switch and actuator not included in scope of delivery

With lock-out device

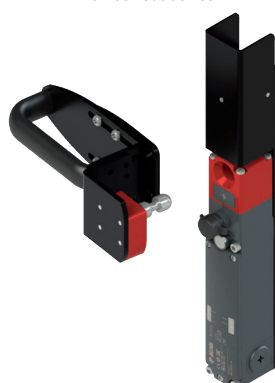

AP G1A-111P



AP G0B-111P

P-KUBE Fast safety handles

Can be used with switches from the FD, FG and FY series

Compact, lightweight solution


Internal lever for emergency escape

Integrated padlockable lock-out device

Suitable for use with hinged and sliding doors, either with right or left closing


Switch not included in scope of delivery

For FG, FY series switches



VF AP-S13BP-300

For FD series switches



VF AP-S13AP-301

P-KUBE Super safety handles

Can be used with switches from the NG series

Suitable for use in particularly demanding work environments

Dual centring pin


Integrated padlockable lock-out device

Thanks to the slotted brackets the handle can be adjusted on 3 different axes

Suitable for use with hinged and sliding doors, either with right or left closing

Switch and actuator not included in scope of delivery

For NG series switches

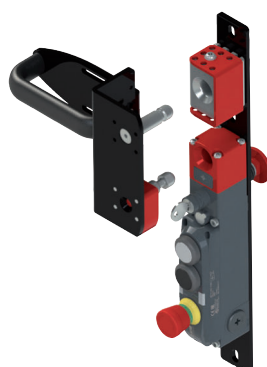


AP G2C-800P



P-KUBE Lite safety handles

- Can be used with safety switches from the FY and FG series
- Flexible installation
- Grip with satin chrome or white finish
- Button to block the handle in the open position
- Suitable for use with sliding doors, with right or left closing
- Device with key for locking the handle in the open position
- Internal lever for emergency escape
- With optional lock-out device on bracket

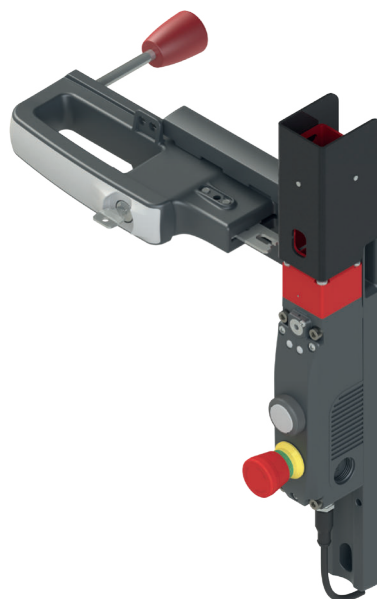

With chrome grip and internal lever for emergency escape

With chrome grip, block button and internal lever for emergency escape

With white grip and internal lever for emergency escape

With white grip, block button and internal lever for emergency escape



	No lock
	With standard lock
	With tubular lock

ANY09ZZ9P	ANY09ZZ1P	ANY01ZZ9P	ANY01ZZ1P
ANY09EA9P	ANY09EA1P	ANY01EA9P	ANY01EA1P
ANY09TA9P	ANY09TA1P	ANY01TA9P	ANY01TA1P

With chrome grip and internal lever for emergency escape. With lock-out device on bracket

With chrome grip, block button and internal lever for emergency escape. With lock-out device on bracket

With white grip and internal lever for emergency escape. With lock-out device on bracket





With white grip, block button and internal lever for emergency escape. With lock-out device on bracket






	No lock
	With standard lock
	With tubular lock

ANY19ZZ9P	ANY19ZZ1P	ANY11ZZ9P	ANY11ZZ1P
ANY19EA9P	ANY19EA1P	ANY11EA9P	ANY11EA1P
ANY19TA9P	ANY19TA1P	ANY11TA9P	ANY11TA1P


P-KUBE Krome safety handles

Can be used with switches from the NS and NG series
 Technopolymer grip
 Satin chrome and illuminated white finishes
 Control button integrated into grip
 Grip illumination with RGB LED
 Internal metal fixing plates
 Suitable for use with hinged and sliding doors, either with right or left closing, same individual product code
 Supply voltage 24 Vdc
 Protection degree IP65
 Optional lock-out device
 Switch and actuator not included in scope of delivery
 Marks:    

Connection cable not necessary

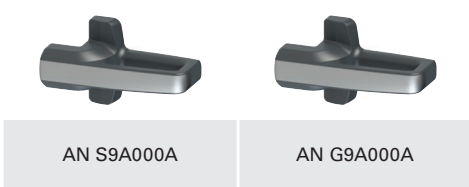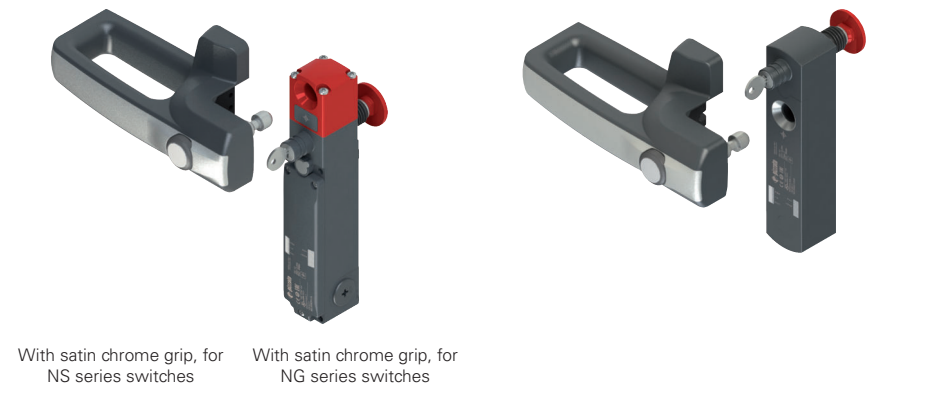

With satin chrome grip, for NS series switches With satin chrome grip, for NG series switches With illuminated grip (white), for NS series switches With illuminated grip (white), for NG series switches




With 3 m long PVC cable



/	/	AN S1B000A-PN3	AN G1B000A-PN3
AN S9A001A-PN3	AN G9A001A-PN3	AN S1B001A-PN3	AN G1B001A-PN3
AN S9A002A-PN3	AN G9A002A-PN3	AN S1B002A-PN3	AN G1B002A-PN3
AN S9A003A-PN3	AN G9A003A-PN3	AN S1B003A-PN3	AN G1B003A-PN3
AN S9A004A-PN3	AN G9A004A-PN3	AN S1B004A-PN3	AN G1B004A-PN3
AN S9A005A-PN3	AN G9A005A-PN3	AN S1B005A-PN3	AN G1B005A-PN3
AN S9A008A-PN3	AN G9A008A-PN3	AN S1B008A-PN3	AN G1B008A-PN3

With satin chrome grip, for NS series switches With satin chrome grip, for NG series switches With illuminated grip (white), for NS series switches With illuminated grip (white), for NG series switches



With 0.15 m long PVC cable and M12 connector




/	/	AN S1B000A-PM0.2	AN G1B000A-PM0.2
AN S9A001A-PM0.2	AN G9A001A-PM0.2	AN S1B001A-PM0.2	AN G1B001A-PM0.2
AN S9A002A-PM0.2	AN G9A002A-PM0.2	AN S1B002A-PM0.2	AN G1B002A-PM0.2
AN S9A003A-PM0.2	AN G9A003A-PM0.2	AN S1B003A-PM0.2	AN G1B003A-PM0.2
AN S9A004A-PM0.2	AN G9A004A-PM0.2	AN S1B004A-PM0.2	AN G1B004A-PM0.2
AN S9A005A-PM0.2	AN G9A005A-PM0.2	AN S1B005A-PM0.2	AN G1B005A-PM0.2
AN S9A008A-PM0.2	AN G9A008A-PM0.2	AN S1B008A-PM0.2	AN G1B008A-PM0.2




P-KUBE Smart safety handles

- Usable with ST series RFID safety sensors
- Possibility of application with horizontal or vertical handle
- Satin chrome and illuminated white finishes
- Control button integrated into grip
- Grip illumination with RGB LED
- Direct fixing on the grip or through solid inner plate
- Suitable for use with hinged and sliding doors, either right or left closing, same individual product code
- Supply voltage 24 Vdc
- Protection degree IP65
- ST series sensor not included
- Marks:

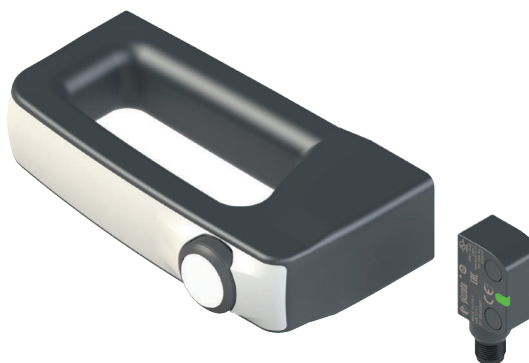

With satin chrome grip with fixing on internal metal plate With satin chrome grip with fixing on the grip



ANT9A000A1	ANT9A100A1
------------	------------

With RFID at a high coding level for ST series sensors. Connection cable not necessary

	Without control device
--	------------------------

With satin chrome grip with fixing on internal metal plate With satin chrome grip with fixing on the grip With illuminated white grip with fixing on the internal metal plate With illuminated white grip with fixing on the grip



With 3 m long PVC cable and RFID at a high coding level for ST series sensors

	Without control device
	With spring-return button, 1NO, white, illuminated
	With spring-return button, 1NO, red, illuminated
	With spring-return button, 1NO, green, illuminated
	With spring-return button, 1NO, yellow, illuminated
	With spring-return button, 1NO, blue, illuminated
	With spring-return button, 1NO, black, non-illuminated

/	/	ANT1B000A1-PN3	ANT1B100A1-PN3
ANT9A001A1-PN3	ANT9A101A1-PN3	ANT1B001A1-PN3	ANT1B101A1-PN3
ANT9A002A1-PN3	ANT9A102A1-PN3	ANT1B002A1-PN3	ANT1B102A1-PN3
ANT9A003A1-PN3	ANT9A103A1-PN3	ANT1B003A1-PN3	ANT1B103A1-PN3
ANT9A004A1-PN3	ANT9A104A1-PN3	ANT1B004A1-PN3	ANT1B104A1-PN3
ANT9A005A1-PN3	ANT9A105A1-PN3	ANT1B005A1-PN3	ANT1B105A1-PN3
ANT9A008A1-PN3	ANT9A108A1-PN3	ANT1B008A1-PN3	ANT1B108A1-PN3

With satin chrome grip with fixing on internal metal plate With satin chrome grip with fixing on the grip With illuminated white grip with fixing on the internal metal plate With illuminated white grip with fixing on the grip



With 0.15 m long PVC cable and M12 connector and RFID at a high coding level for ST series sensors

	Without control device
	With spring-return button, 1NO, white, illuminated
	With spring-return button, 1NO, red, illuminated
	With spring-return button, 1NO, green, illuminated
	With spring-return button, 1NO, yellow, illuminated
	With spring-return button, 1NO, blue, illuminated
	With spring-return button, 1NO, black, non-illuminated

/	/	ANT1B000A1-PM0.2	ANT1B100A1-PM0.2
ANT9A001A1-PM0.2	ANT9A101A1-PM0.2	ANT1B001A1-PM0.2	ANT1B101A1-PM0.2
ANT9A002A1-PM0.2	ANT9A102A1-PM0.2	ANT1B002A1-PM0.2	ANT1B102A1-PM0.2
ANT9A003A1-PM0.2	ANT9A103A1-PM0.2	ANT1B003A1-PM0.2	ANT1B103A1-PM0.2
ANT9A004A1-PM0.2	ANT9A104A1-PM0.2	ANT1B004A1-PM0.2	ANT1B104A1-PM0.2
ANT9A005A1-PM0.2	ANT9A105A1-PM0.2	ANT1B005A1-PM0.2	ANT1B105A1-PM0.2
ANT9A008A1-PM0.2	ANT9A108A1-PM0.2	ANT1B008A1-PM0.2	ANT1B108A1-PM0.2

Lock-out devices

Can be used with switches from the NS, NG, FG and FY series

Made entirely of metal

Prevents unexpected start-up of the machine

Mechanical and RFID signal shielding of actuator

Compatible with P-KUBE 2, P-KUBE Krome and P-KUBE Lite safety handles.

For NS series switches, mounting on the left side of the switch



LK S1S001

For NS series switches, mounting on the right side of the switch



LK S1D001

For NG series switches



AP G1Z-000Z

For FY, FG series switches



LKY1X001

5H Connection gateway for safety devices

P-Connect connection gateway for safety devices

Aluminium housing

Protection degree IP65

Operating temperature -15 °C ... +50 °C

3 to 5 LEDs integrated in the device for status indication

Devices can be connected in series

Connection: PROFINET — PROFIsafe

EtherNet/IP™ - CIP Safety™

EtherCAT® - Safety over EtherCAT®



PROFINET - PROFIsafe

Solution with NG/NS series switches, P-KUBE Krome safety handle and BN series control device units

Solutions with NG and NS series switch, P-KUBE Krome safety handle, BN series control device unit, signalling device, safety device with OSSD safety outputs and control device unit including emergency stop

Solution with NG/NS series switches with integrated controls and P-KUBE Krome safety handles

Solution with NG/NS/NX series switches featuring integrated control device units, ST series RFID safety sensors (up to 6), and BN series control unit with 3 or 4 control devices (2 or 3 illuminated buttons and one emergency stop button) (up to 4)



BP A1PL2001



BP A1PL2002



BP A1PL2003



BP A1PL2004



BP A1CL2001



BP A1CL2002



BP A1CL2003



BP A1CL2004



EtherNet/IP™ - CIP Safety™



BP A1EL2001



BP A1EL2002



BP A1EL2003



BP A1EL2004



EtherCAT® - Safety over EtherCAT®





Passive distribution box

Passive distribution box BC series

Technopolymer housing

Protection degree up to IP67

Various models available for I/O: M23 connector, 19-pole cable, 12-pole cable

Versions with 4 or 8 M12 connectors available

Integrated signalling LEDs

Marks:

M23, 12-pole front connector
4 devices



Axial output, PVC cable 12 x 0.5 mm², length 2 m,
4 devices



M23, 19-pole front connector
8 devices



Axial output, PVC cable 2 x 0.75 mm² + 17 x 0.34 mm², length 2 m
8 devices



One common input I3/IE1 for all devices	BC 1Z4A1A1FSK	BC 1Z4A1A1AF2	BC 2Z8A1A1FTK	BC 2Z8A1A1AL2
Independently connected inputs I3/IE1	BC 1Z4A2A1FSK	BC 1Z4A2A1AF2	/	/
Independently connected inputs I3/IE1 for 6 devices and one common input for two additional devices	/	/	BC 2Z8A3A1FTK	BC 2Z8A3A1AL2

Rope switches for emergency stop FD, FL, FC and FP series

Technopolymer housing or metal housing

One or three conduit entries


Protection degree IP67

Marks:

1NO+1NC contacts

2NC contacts

1NO+2NC contacts

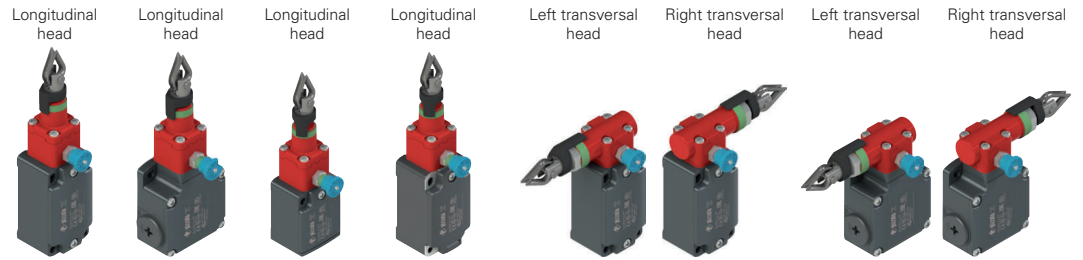

FD 1878-M2 ⊕	FL 1878-M2 ⊕	FC 3378-M2 ⊕	FP 1878-M2 ⊕	FD 1883-M2 ⊕	FD 1884-M2 ⊕	FL 1883-M2 ⊕	FL 1884-M2 ⊕
FD 978-M2 ⊕	FL 978-M2 ⊕	FC 3478-M2 ⊕	FP 978-M2 ⊕	FD 983-M2 ⊕	FD 984-M2 ⊕	FL 983-M2 ⊕	FL 984-M2 ⊕
FD 2078-M2 ⊕	FL 2078-M2 ⊕	/	FP 2078-M2 ⊕	FD 2083-M2 ⊕	FD 2084-M2 ⊕	FL 2083-M2 ⊕	FL 2084-M2 ⊕

FD, FL, FC and FP series rope switches for simple stop

Technopolymer housing or metal housing

One or three conduit entries


Protection degree IP67

Marks:

1NO+1NC contacts

2NC contacts

1NO+2NC contacts

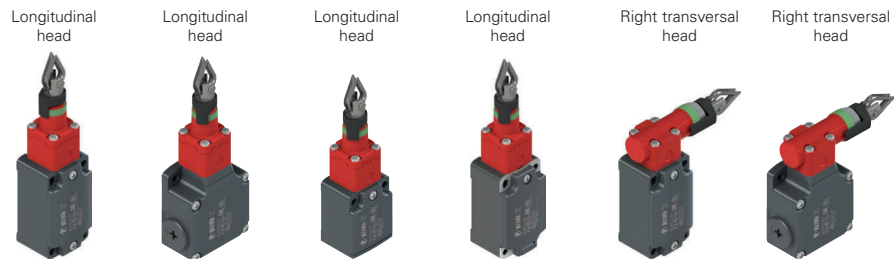

FD 1879-M2 ⊕	FL 1879-M2 ⊕	FC 3379-M2 ⊕	FP 1879-M2 ⊕	FD 1880-M2 ⊕	FL 1880-M2 ⊕
FD 979-M2 ⊕	FL 979-M2 ⊕	FC 3479-M2 ⊕	FP 979-M2 ⊕	FD 980-M2 ⊕	FL 980-M2 ⊕
FD 2079-M2 ⊕	FL 2079-M2 ⊕	/	FP 2079-M2 ⊕	FD 2080-M2 ⊕	FL 2080-M2 ⊕

Accessories for rope installation




VF AF-TR5	VF AF-TR8	VF AF-MR5	VF AF-TR2X	VF T870	VF AF-ME78	VF AF-ME80	VF F05-200	VF AF-IF1GR11	VF AF-CA5	VF AF-CA10
Adjustable stay bolt	Stay bolt	End clamp	Adjustable stay bolt in stainless steel	Stay bolt	Safety spring for longitudinal heads	Safety spring for transversal heads	Rope Ø 5 mm. Spool with 200 m	Rope function indicator "V"	Stainless steel pulley	Angular pulley, stainless steel

Accessory sets for rope installation - FAST line



Article	Set content	
VF AF-KT10M0	1x VF AF-TR5 1x VF AF-MR5 1x VF F05-010	10 m
VF AF-KT20M0	1x VF AF-TR5 1x VF AF-MR5 1x VF F05-020	20 m
VF AF-KT35M0	1x VF AF-TR5 1x VF AF-MR5 1x VF F05-035	35 m

Application example

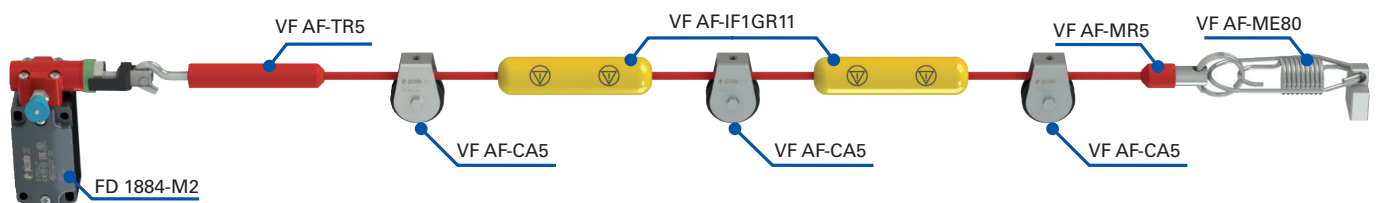




The clear objectives in the development of the CS series safety modules were safety and reliability. The design, development and production of these products have been approached with the passion for quality that characterises Pizzato Elettrica.

During the design phase, the components were deliberately oversized and the circuit diagrams were verified by third-party and independent bodies. Quality was the underlying factor for choosing the components. Basic elements, such as the relays with forcibly guided contacts, were chosen from leading manufacturers. The production process, done entirely in-house by Pizzato Elettrica, is controlled by a functional check of 100% of all products. Every single part produced is tested in a computerized testing station that, only if the product passes all the electrical tests, prints the label of the safety module, identified by a precise serial number.

Particular attention has been paid to the connection type. Here, the customer can choose between fixed terminals, a removable connector, screw connections or spring connections. Additionally, the product range includes different supply voltages with wide tolerances of the nominal values, so as to be compatible for use in less industrialized countries as well.

Safety modules for emergency stops and end position monitoring for movable guards




6A

Product code	Supply voltage	Output contacts instantaneous	For applications up to			Start		Inputs of opposite potentials	Equipotential inputs	Parallel start (24 Vdc only)	Input types ⑥				Housing dimensions (mm)
			PL	SIL	Saf. cat.	autom. & manual	monitored				L	K	LK	KL	
CS AR-01V024	24 Vac/dc	2NO+1NC	e	3	4	■	■	■	■	■	■	■	■	-	22.5 x 114
CS AR-01V120	120 Vac	2NO+1NC	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-01V230	230 Vac	2NO+1NC	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-01VE02	10 ... 30 Vdc	2NO+1NC	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-02V024	24 Vac/dc	3NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-02V120	120 Vac	3NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-02V230	230 Vac	3NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-02VE02	10 ... 30 Vdc	3NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-04V024	24 Vac/dc	3NO+1NC	e	3	4	■	■	■	-	■	■	-	■	-	22.5 x 114
CS AR-04V120	120 Vac	3NO+1NC	e	3	4	■	■	■	-	-	■	-	■	-	22.5 x 114
CS AR-04V230	230 Vac	3NO+1NC	e	3	4	■	■	■	-	-	■	-	■	-	22.5 x 114
CS AR-05V024	24 Vac/dc	3NO+1NC	e	3	4	■	-	■	■	■	■	■	■	-	22.5 x 114
CS AR-05V120	120 Vac	3NO+1NC	e	3	4	■	-	■	■	-	■	■	■	-	22.5 x 114
CS AR-05V230	230 Vac	3NO+1NC	e	3	4	■	-	■	■	-	■	■	■	-	22.5 x 114
CS AR-06V024	24 Vac/dc	3NO+1NC	e	3	4	-	■	■	■	■	■	■	■	-	22.5 x 114
CS AR-06V120	120 Vac	3NO+1NC	e	3	4	-	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-06V230	230 Vac	3NO+1NC	e	3	4	-	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-07M024 ④	24 Vac/dc	4NO+1NC	e	3	4	■	■	■	-	■	■	-	-	-	22.5 x 149
CS AR-08VU12	12 Vdc	2NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-08V024	24 Vac/dc	2NO	e	3	4	■	■	■	■	■	■	■	■	-	22.5 x 114
CS AR-08V120	120 Vac	2NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-08V230	230 Vac	2NO	e	3	4	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AR-20V024	24 Vac/dc	2NO	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-20V120	120 Vac	2NO	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-20V230	230 Vac	2NO	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-21V024	24 Vac/dc	2NO	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-21V120	120 Vac	2NO	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-21V230	230 Vac	2NO	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-22V024	24 Vac/dc	3NO+1NC	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-22V120	120 Vac	3NO+1NC	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-22V230	230 Vac	3NO+1NC	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-23V024	24 Vac/dc	3NO+1NC	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-23V120	120 Vac	3NO+1NC	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-23V230	230 Vac	3NO+1NC	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-24V024	24 Vac/dc	4NO+1NC	e	3	3	■	-	-	-	-	■	-	-	-	22.5 x 114
CS AR-25V024	24 Vac/dc	4NO+1NC	e	3	3	-	■	-	-	-	■	-	-	-	22.5 x 114
CS AR-40V024	24 Vac/dc	2NO	d	2	2	■	-	-	-	-	■	-	-	-	22.5 x 91
CS AR-41V024	24 Vac/dc	2NO	d	2	2	-	■	-	-	-	■	-	-	-	22.5 x 91
CS AR-46V024	24 Vac/dc	1NO	c	1	1	■	-	■	-	-	■	-	■	-	22.5 x 91
CS AR-91V024	24 Vac/dc	2NO+1PNP	e	3	4	■	■	■	-	■	■	-	■	-	22.5 x 114

Code structure

CS AR-01V024

Connection type		Supply voltage	
V	Screw terminals	U12	12 Vdc
M	Connector with screw terminals	U24	24 Vdc
X	Connector with spring terminals	024	24 Vac/dc
		E02	10 ... 30 Vdc
		120	120 Vac
		230	230 Vac




6B Safety modules for 4-wire safety mats and safety bumpers



Product code	Supply voltage	Output contacts instantaneous		For applications up to			Start		Inputs of opposite potentials	Equipotential inputs	Parallel start (24 Vdc only)	Input types ⑥				Housing dimensions (mm)
		PL	SIL	Saf. cat.	autom. & manual	monitored	⚡	⚡				⚡	⚡			
CS AR-51V024	24 Vac/dc	2NO	e	3	4	■	■	■	-	-	■	-	-	■	22.5 x 114	

6C Safety modules for emergency stops and end position monitoring for movable guards with delayed contacts




Product code	Supply voltage	Output contacts		For applications up to			Start		Inputs of opposite potentials	Equipotential inputs	Parallel start (24 Vdc only)	Input types ⑥				Housing dimensions (mm)
		instantaneous	delayed	PL	SIL	Saf. cat.	autom. & manual	monitored				⚡	⚡	⚡	⚡	
CS AT-0 ③ V024	24 Vac/dc	2NO+1NC	2NO	e	3	②	■	■	■	■	■	■	■	■	-	22.5 x 114
CS AT-0 ③ V120	120 Vac	2NO+1NC	2NO	e	3	②	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AT-0 ③ V230	230 Vac	2NO+1NC	2NO	e	3	②	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AT-1 ③ V024	24 Vac/dc	3NO	2NO	e	3	②	■	■	■	■	■	■	■	■	-	22.5 x 114
CS AT-1 ③ V120	120 Vac	3NO	2NO	e	3	②	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AT-1 ③ V230	230 Vac	3NO	2NO	e	3	②	■	■	■	■	-	■	■	■	-	22.5 x 114
CS AT-3 ③ V024	24 Vac/dc	2NO	1NO	e	3	②	■	■	■	-	-	■	-	■	-	22.5 x 114

6D Safety timer modules



Product code	Supply voltage	Function	Output contacts delayed	For applications up to			Start		Inputs of opposite potentials	Equipotential inputs	Parallel start (24 Vdc only)	Input types ⑥				Housing dimensions (mm)
				PL	SIL	Saf. cat.	autom. & manual	monitored				⚡	⚡	⚡	⚡	
CS FS-1 ③ V024	24 Vac/dc	delay on	1NO+2NC	①	①	①	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-1 ③ V120	120 Vac	delay on	1NO+2NC	①	①	①	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-1 ③ V230	230 Vac	delay on	1NO+2NC	①	①	①	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-2 ③ VU24	24 Vdc	delay on	1NO+1NC+1CO	d	2	3	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-2 ③ V120	120 Vac	delay on	1NO+1NC+1CO	d	2	3	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-3 ③ VU24	24 Vdc	delay off	1NO+1NC+1CO	d	2	3	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-3 ③ V120	120 Vac	delay off	1NO+1NC+1CO	d	2	3	-	-	-	-	-	■	-	-	-	45 x 114
CS FS-5 ③ VU24	24 Vdc	delay off	1NO+1NC+1CO	d	2	3	■	■	-	■	-	■	-	■	-	45 x 114
CS FS-5 ③ V120	120 Vac	delay off	1NO+1NC+1CO	d	2	3	■	■	-	■	-	■	-	■	-	45 x 114

6E Safety modules for two-hand controls or synchronism monitoring



Product code	Supply voltage	Output contacts instantaneous	Safety category	Start		Inputs of opposite potentials	Equipotential inputs	Parallel start (24 Vdc only)	Input types ⑥				Housing dimensions (mm)
				autom. & manual	monitored				⚡	⚡	⚡	⚡	
CS DM-01V024	24 Vac/dc	3NO+1NC	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-01V120	120 Vac	3NO+1NC	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-01V230	230 Vac	3NO+1NC	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-02V024	24 Vac/dc	2NO	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-02V120	120 Vac	2NO	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-02V230	230 Vac	2NO	IIIC (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-20V024	24 Vac/dc	2NO	IIIA (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-20V120	120 Vac	2NO	IIIA (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114
CS DM-20V230	230 Vac	2NO	IIIA (EN ISO 13851)	-	-	■	-	-	■	-	-	-	22,5 x 114

Legend

- Available for this article
- Not available for this article
- ① Depending on the base module
- ② Category 4 for instantaneous contacts; Category 3 for delayed contacts.
- ③ Release times for delayed contacts
 - 0 fixed time
 - 1 adjustable, 0.3 ... 3 s, 0.3 s steps
 - 2 adjustable, 1 ... 10 s, 1 s steps
 - 3 adjustable, 3 ... 30 s, 3 s steps
 - 4 adjustable, 30 ... 300 s, 30 s steps
- ④ Exclusively for module CS AR-07, there is no version with screw terminals.
- ⑤ Release time in absence of power supply
 - TF0.5 0.5 s fixed time
 - TF1 1 s fixed time
 - TF2 2 s fixed time
 - TF3 3 s fixed time

⑥ Input type

- ⚡ electromechanical contacts
- ⚡ semiconductor outputs (e.g. light barriers)
- ⚡ magnetic safety sensors
- ⚡ 4-wire safety mats and safety bumpers

Quality marks:





Safety modules for motor standstill, speed and motor direction of rotation monitoring



Product code	Supply voltage	Output contacts instantaneous	For applications up to			Safety function			Input type		Housing dimensions (mm)
			PL	SIL	Saf. cat.	Detection motor standstill	Detection motor speed	Direction-of-rotation detection	Sensorless	With proximity sensor	
CS AM11P1•U	24 Vdc	2 OSSD	e	3	4	■	-	-	■	■	22,5 x 114
CS AM12P1•U	24 Vdc	3 NO	e	3	4	■	-	-	■	■	45 x 114
CS AM14P1•U	24 Vdc	2NO + 1NC	e	3	4	■	-	-	■	■	45 x 114
CS AM21P1•U	24 Vdc	2 OSSD	e	3	4	-	■	■	■	■	22,5 x 114
CS AM22P1•U	24 Vdc	3 NO	e	3	4	-	■	■	■	■	45 x 114
CS AM23P1•U	24 Vdc	3 NO + 3NO	e	3	4	-	■	■	■	■	45 x 114
CS AM31P1•U	24 Vdc	2 OSSD	e	3	4	■	■	■	■	■	22,5 x 114
CS AM33P1•U	24 Vdc	3 NO + 3NO	e	3	4	■	■	■	■	■	45 x 114


Legend

- Available for this article
- Not available for this article

Quality marks:



Expansion modules with instantaneous contacts or delayed contacts at de-energizing



Product code	Supply voltage	Output contacts			For applications up to			Delay time upon de-energizing	Inputs of opposite potentials	Equipotential inputs	Input types ⑥				Housing dimensions (mm)
		instantaneous	delayed	feedback	PL	SIL	Saf. cat.				⎓	⎓	⎓	⎓	
CS ME-01V024	24 Vac/dc	5NO+1NC	-	1NC	①	①	①	-	①	①	■	-	-	-	22,5 x 114
CS ME-02VU24	24 Vdc	4NO+2NC	-	1NC	①	①	①	-	①	①	■	-	-	-	22,5 x 114
CS ME-03VU24	24 Vdc	3NO	-	1NC	①	①	①	-	-	■	■	■	-	-	22,5 x 91
CS ME-20VU24-TF ⑤	24 Vdc	-	4NO+2NC	1NC	①	①	①	up to 3 s (fix)	①	①	■	-	-	-	22,5 x 114
CS ME-31VU24-TS12	24 Vdc	-	4NO+2NC	1NC	①	①	①	1 ... 12 s (adjustable)	①	①	■	-	-	-	45 x 114

Legend

- Available for this article
- Not available for this article
- ① Depending on the base module
- ② Category 4 for instantaneous contacts; Category 3 for delayed contacts.
- ③ Release times for delayed contacts
 - 0 fixed time
 - 1 adjustable, 0,3 ... 3 s, 0,3 s steps
 - 2 adjustable, 1 ... 10 s, 1 s steps
 - 3 adjustable, 3 ... 30 s, 3 s steps
 - 4 adjustable, 30 ... 300 s, 30 s steps
- ④ Exclusively for module CS AR-07, there is no version with screw terminals.
- ⑤ Release time in absence of power supply
 - TF0.5 0.5 s fixed time
 - TF1 1 s fixed time
 - TF2 2 s fixed time
 - TF3 3 s fixed time

⑥ Input type

- ⎓ electromechanical contacts
- ⎓ semiconductor outputs (e.g. light barriers)
- ⎓ magnetic safety sensors
- ⎓ 4-wire safety mats and safety bumpers

Quality marks:



Code structure

CS AR-01V024

Safety function		Supply voltage	
AR	For emergency stops and end position monitoring for movable guards	024	24 Vac/dc
		120	120 Vac
		230	230 Vac
AT	For emergency stops and end position monitoring for movable guards with delayed contacts upon opening of the inputs	Connection type	
FS	Safety timer modules	V	Screw terminals
DM	For two-hand controls or synchronism monitoring	M	Connector with screw terminals
ME	Expansion modules	X	Connector with spring terminals



V morsetti a vite



M connettore estraibile con morsetti a vite



X connettore estraibile con morsetti a molla



GEMNIS


The CS MP series programmable safety modules are the result of Pizzato Elettrica's long experience in the machine safety sector. A CS MP series module is a programmable safety device, which allows several safety functions to be carried out simultaneously. This product series has been developed for manufacturers of machines with a low to average number of safety functions. As an indication, these modules can manage applications which are equivalent to the functions carried out by 3 to 4 traditional electromechanical safety modules, up to circuits with dozens of inputs.

The **Gemnis Studio** program is a graphic development environment for the creation, simulation and debugging of programs that are uploaded to the corresponding modules of the Gemnis family. **This software is licensed free of charge to users wishing to program these modules, subject to prior registration at www.gemnis.com**


Quality marks:




Article	CS MP201M0	CS MP202M0	CS MP203M0	CS MP204M0	CS MP205M0
Dimensions (H x W x D)	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm
Safety inputs (Ix)	8	16	12	12	4
Decoupled digital inputs (Jx)	/	/	/	/	4
Inputs for 4-20 mA analogue signals (Cx)	/	/	/	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	/	/	/	/	4
Test outputs (Tx)	8	4	4	4	4
Semiconductor signalling output circuits (Ox)	4	4	4	4	4
Semiconductor safety output circuits (OSx)	/	4PNP	/	/	4PNP
Safety relay circuits	3NO	/	3NO+1NO	3NO	/

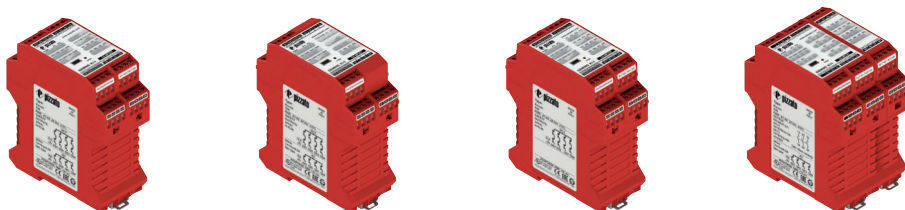


Article	CS MP206M0	CS MP207M0	CS MP208M0	CS MP301M0
Dimensions (H x W x D)	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm	111.5 x 45 x 99 mm	111.5 x 67.5 x 99 mm
Safety inputs (Ix)	8	4	16	24
Decoupled digital inputs (Jx)	/	/	/	/
Inputs for 4-20 mA analogue signals (Cx)	/	2	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	/	/	/	/
Test outputs (Tx)	4	4	4	8
Semiconductor signalling output circuits (Ox)	12	4	/	4
Semiconductor safety output circuits (OSx)	4PNP	4PNP	8PNP	/
Safety relay circuits	/	/	/	3NO

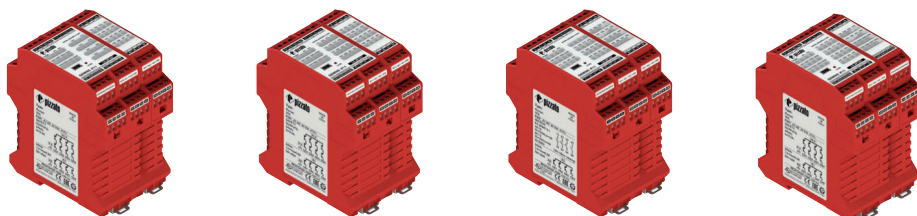

Article	CS MP302M0	CS MP303M0	CS MP304M0	CS MP305M0
Dimensions (H x W x D)	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm
Safety inputs (Ix)	24	32	28	24
Decoupled digital inputs (Jx)	/	/	/	/
Inputs for 4-20 mA analogue signals (Cx)	/	/	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	/	/	/	/
Test outputs (Tx)	12	4	4	4
Semiconductor signalling output circuits (Ox)	4	4	4	12
Semiconductor safety output circuits (OSx)	4PNP	4PNP	/	4PNP
Safety relay circuits	/	/	3NO+1NO	/



Article	CS MP306M0	CS MP307M0	CS MP308M0	CS MP309M0
Dimensions (H x W x D)	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm
Safety inputs (Ix)	20	8	24	32
Decoupled digital inputs (Jx)	/	4	/	/
Inputs for 4-20 mA analogue signals (Cx)	/	2	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	/	4	/	/
Test outputs (Tx)	4	4	4	4
Semiconductor signalling output circuits (Ox)	12	4	8	/
Semiconductor safety output circuits (OSx)	/	4PNP	8PNP	8PNP
Safety relay circuits	3NO+1NO	/	/	/




Article	CS MP310M0	CS MP311M0	CS MP312M0	CS MP401M0
Dimensions (H x W x D)	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 67.5 x 99 mm	111.5 x 90 x 99 mm
Safety inputs (Ix)	8	20	16	40
Decoupled digital inputs (Jx)	8	/	4	/
Inputs for 4-20 mA analogue signals (Cx)	/	2	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	8	/	4	/
Test outputs (Tx)	4	4	8	4
Semiconductor signalling output circuits (Ox)	4	4	/	12
Semiconductor safety output circuits (OSx)	4PNP	4PNP	8PNP	4PNP
Safety relay circuits	/	/	/	/



Article	CS MP402M0	CS MP403M0	CS MP406M0
Dimensions (H x W x D)	111.5 x 90 x 99 mm	111.5 x 90 x 99 mm	111.5 x 90 x 99 mm
Safety inputs (Ix)	32	40	32
Decoupled digital inputs (Jx)	/	/	/
Inputs for 4-20 mA analogue signals (Cx)	/	/	/
Inputs for frequency signals from 0 to 4 kHz (speed monitor) (Fx)	/	/	/
Test outputs (Tx)	12	4	4
Semiconductor signalling output circuits (Ox)	8	8	20
Semiconductor safety output circuits (OSx)	8PNP	8PNP	4PNP
Safety relay circuits	/	/	/

For the latest news visit the website www.gemnis.com



GEMNIS

An increasing number of users requires products which carry out several safety functions without needing the complex management of a safety PLC or the complex wiring of many traditional safety modules. Such problems arise mainly when the safety functions are typically greater than 3 or 4, or when managing a safety PLC software (software purchase, training courses, programming of all modules, software management and filing, updates etc.) turns out to be too great an overhead in relation to problem complexity. With the CS MF series of Gemnis, Pizzato Elettrica offers a series of electronic modules which are pre-programmed for specific customer applications or for generic safety macro-functions commonly used in industrial contexts.

The General Catalogue Safety (available from www.pizzato.com) lists some of the pre-programmed products for generic macro-functions commonly used in the industrial sector. These products are available for individual purchase. Any customer requiring a product pre-programmed to their particular specification can contact the Pizzato Elettrica technical department (minimum volumes are requested). All Gemnis series products are able to provide circuit solutions at SIL 3 (EN IEC 62061), PL e (EN ISO 13849-1) or category 4 (EN ISO 13849-1) levels.

CS MF201M0-P●●

Hardware code

●● Hardware code

Program code

P●● Program code

Quality marks:



Connection type













M	Connector with screw terminals
----------	--------------------------------

X	Connector with spring terminals
----------	---------------------------------

Supply voltage

0	24 Vdc
----------	--------

Connectors with cable

Con- nection type	Connector type	No. of poles	Cable sheath	Cable length (L)						Page
				3 metres	5 metres	10 metres	20 metres	30 metres	Other lengths available	
M8x1 female			PVC	VF CA4PD3K	VF CA4PD5K	VF CA4PD10K	VF CA4PD20K	*	VF CA4PD2K 2 metres	73
			PUR	*	VF CA4UD5K	*	*	*	VF CA4UD1K 1 metre VF CA4UD2K 2 metres	
M12x1 male			PVC	VF CF4PD3M	*	*	*	*	VF CF4PD2M 2 metres	73
			PVC	VF CF5PD3M	VF CF5PD5M	*	*	*	*	
			PVC	VF CF8PD3M	VF CF8PD5M	VF CF8PD10M	*	*	*	
		PVC	VF CF8PG3M	*	*	*	*	*		
M12x1 female			PVC	VF CA4PD3M	VF CA4PD5M	VF CA4PD10M	*	*	VF CA4PD1M 1 metre VF CA4PD2M 2 metres VF CA4PD4M 4 metres	73
			PUR	VF CA4UD3M	VF CA4UD5M	VF CA4UD10M	*	*	VF CA4UD2M 2 metres	
			PVC	VF CA5PD3M	VF CA5PD5M	VF CA5PD10M	VF CA5PD20M	VF CA5PD30M	VF CA5PD1M 1 metre VF CA5PD2M 2 metres VF CA5PD4M 4 metres VF CA5PD15M 15 metres VF CA5PD25M 25 metres	
			PUR	VF CA5UD3M	VF CA5UD5M	VF CA5UD10M	*	*	VF CA5UD1M 1 metre VF CA5UD2M 2 metres VF CA5UD15M 15 metres	
			PVC	VF CA8PD3M	VF CA8PD5M	VF CA8PD10M	VF CA8PD20M	VF CA8PD30M	VF CA8PD1M 1 metre VF CA8PD2M 2 metres VF CA8PD15M 15 metres	
			PUR	VF CA8UD3M	VF CA8UD5M VF CA8UD5M-X	VF CA8UD10M VF CA8UD10M-X	*	VF CA8UD30M VF CA8UD30M-X	VF CA8UD2M 2 metres VF CA8UD15M 15 metres VF CA8UD15M-X 15 metres VF CA8UD25M 25 metres VF CA8UD25M-X 25 metres VF CA8UD40M-X 40 metres	
			PVC	VF CA12PD3M	VF CA12PD5M	VF CA12PD10M	VF CA12PD20M VF CA12PD20M-X	VF CA12PD30M	VF CA12PD1M 1 metre VF CA12PD2M 2 metres VF CA12PD15M 15 metres VF CA12PD25M 25 metres	
			PUR	*	VF CA12UD5M VF CA12UD5M-X	VF CA12UD10M VF CA12UD10M-X	VF CA12UD20M VF CA12UD20M-X	VF CA12UD30M VF CA12UD30M-X	VF CA12UD1M 1 metre VF CA12UD40M-X 40 metres	

Connectors with cable





Con- nection type	Connector type	No. of poles	Cable sheath	Cable length (L)						Page
				3 metres	5 metres	10 metres	20 metres	30 metres	Other lengths available	
M12x1 female		4	PVC	VF CA4PG3M	VF CA4PG5M	VF CA4PG10M	*	*	VF CA4PG1M 1 metre VF CA4PG2M 2 metres	73
			PUR	VF CA4UG3M	VF CA4UG5M	*	*	*	VF CA4UG1M 1 metre	
		5	PVC	VF CA5PG3M	VF CA5PG5M	VF CA5PG10M	*	*	VF CA5PG2M 2 metres	
			PUR	VF CA5UG3M	*	VF CA5UG10M	*	*	VF CA5UG2M 2 metres	
		8	PVC	VF CA8PG3M	VF CA8PG5M	VF CA8PG10M	*	*	VF CA8PG2M 2 metres VF CA8PG15M 15 metres	
			PUR	*	*	VF CA8UG10M	*	*	VF CA8UG2M 2 metres	
		12	PVC	*	VF CA12PG5M	VF CA12PG10M	*	*	*	
			PUR	*	VF CA12UG5M	VF CA12UG10M	*	*	VF CA12UG15M 15 metres	
M12x1 extension cable		5	PVC	VF CA5PD3M-MD	VF CA5PD5M-MD	VF CA5PD10M-MD	*	*	VF CA5PD1M-MD 1 metre VF CA5PD2M-MD 2 metres	73
			PVC	VF CA8PD3M-MD	VF CA8PD5M-MD	VF CA8PD10M-MD	VF CA8PD20M-MD	*	*	
		12	PVC	*	VF CA12PD5M-MD	VF CA12PD10M-MD	VF CA12PD20M-MD	*	*	
M123x1 female		12	PVC	*	VF CA12PD5S	VF CA12PD10S	VF CA12PD20S	VF CA12PD30S	VF CA12PD1S 1 metre VF CA12PD40S 40 metres	74
		19	PVC	*	VF CA19PD5S	VF CA19PD10S	VF CA19PD20S	VF CA19PD30S	VF CA19PD1S 1 metre VF CA19PD2S 2 metres VF CA19PD40S 40 metres	
M123x1 extension cable		19	PVC	*	VF CA19PD5S-SD	VF CA19PD10S-SD	VF CA19PD20S-SD	*	*	74

Table subject to changes. Check online at www.pizzato.com or contact our technical department.

Stock codes

	Minimum order quantity
Normally held in stock	1
Not in stock	50 100

Codes on request

* Contact our offices

M8 - M12 connectors



M12 male connectors for panel mounting
Protection degrees IP67 and IP69K.
PG 13.5 or M20x1.5 thread on the device side.
Gold-plated contacts.

	Article	Description
Threads M20x1.5	VF CNM4MM	M12 connector, 4-pole, metal
	VF CNM5MM	M12 connector, 5-pole, metal
	VF CNM8MM	M12 connector, 8-pole, metal
	VF CNM12MM-L16	M12 connector, 12-pole, metal
	VF CNP4MM	M12 connector, 4-pole, plastic
	VF CNP5MM	M12 connector, 5-pole, plastic
	VF CNP8MM	M12 connector, 8-pole, plastic
Threads PG 13.5	VF CNM4PM	M12 connector, 4-pole, metal
	VF CNM5PM	M12 connector, 5-pole, metal
	VF CNM8PM	M12 connector, 8-pole, metal
	VF CNP4PM	M12 connector, 4-pole, plastic
	VF CNP5PM	M12 connector, 5-pole, plastic



M8 and M12 female connectors with cable
Protection degrees IP67 and IP69K.
Anti-vibration self-locking ring nut.
Gold-plated contacts.

	Article	Description
PVC cable	VF CA4PD3K	M8 connector, 4-pole, straight, length 3 m
	VF CA4PD5K	M8 connector, 4-pole, straight, length 5 m
	VF CA4PD3M	M12 connector, 4-pole, straight, length 3 m
	VF CA4PD5M	M12 connector, 4-pole, straight, length 5 m
	VF CA4PD10M	M12 connector, 4-pole, straight, length 10 m
	VF CA5PD3M	M12 connector, 5-pole, straight, length 3 m
	VF CA5PD5M	M12 connector, 5-pole, straight, length 5 m
	VF CA5PD10M	M12 connector, 5-pole, straight, length 10 m
	VF CA8PD3M	M12 connector, 8-pole, straight, length 3 m
	VF CA8PD5M	M12 connector, 8-pole, straight, length 5 m
	VF CA8PD10M	M12 connector, 8-pole, straight, length 10 m
	VF CA8PD20M	M12 connector, 8-pole, straight, length 20 m
	VF CA12PD3M	M12 connector, 12-pole, straight, length 3 m
	VF CA12PD5M	M12 connector, 12-pole, straight, length 5 m
	VF CA12PD10M	M12 connector, 12-pole, straight, length 10 m
	VF CA12PD20M	M12 connector, 12-pole, straight, length 20 m
	VF CA12PD30M	M12 connector, 12-pole, straight, length 30 m
	PUR cable	VF CA8UD5M-X
VF CA8UD10M-X		M12 connector, 8-pole, straight, length 10 m, with stainless steel hexagonal ring nut
VF CA12UD10M-X		M12 connector, 12-pole, straight, length 10 m, with stainless steel hexagonal ring nut



Field wireable M12 female connectors
Technopolymer connector body.
Gold-plated contacts.
Screw terminals for cable screw fittings.
Protection degree IP67.

Article	Description
VF CBMP4DM04	Field wireable M12 female connector, 4-pole, straight, for Ø 4 ... 6.5 mm multipolar cables
VF CBMP5DM04	Field wireable M12 female connector, 5-pole, straight, for Ø 4 ... 6.5 mm multipolar cables
VF CBMP8DM04	Field wireable M12 female connector, 8-pole, straight, for Ø 4 ... 7 mm multipolar cables



Field wireable M12 male connectors
Technopolymer connector body.
Gold-plated contacts.
Screw terminals for cable screw fittings.
Protection degree IP67.

Article	Description
VF CCMP5DM04	Field wireable M12 male connector, 5-pole, straight, for Ø 4 ... Ø 6.5 mm multipolar cables
VF CCMP8DM04	Field wireable M12 male connector, 8-pole, straight, for Ø 4 ... Ø 7 mm multipolar cables

M12 connectors for series connection



M12 extension cables with male and female connector
Polyurethane connector body.
Protection degree IP67.
Gold-plated contacts.
Anti-vibration self-locking ring nut.

Article	Description
VF CA5PD3M-MD	M12 connector, 5-pole, straight, length 3 m
VF CA5PD5M-MD	M12 connector, 5-pole, straight, length 5 m
VF CA5PD10M-MD	M12 connector, 5-pole, straight, length 10 m
VF CA8PD3M-MD	M12 connector, 8-pole, straight, length 3 m
VF CA8PD5M-MD	M12 connector, 8-pole, straight, length 5 m
VF CA8PD10M-MD	M12 connector, 8-pole, straight, length 10 m



M12 terminating plugs for series connections
Polyurethane connector body.
Protection degree IP67.
Gold-plated contacts.
Anti-vibration self-locking ring nut.

Article	Description
VF CY100P0	M12 terminating plugs for series connections, 4-pole



Y-cable with M12 connectors, for series connections, 150 mm cable length
Polyurethane connector body.
Protection degree IP67.
Gold-plated contacts.
Anti-vibration self-locking ring nut.

Article	Description
VF CY201P0	Y-cable with M12 connectors, for series connections, 150 mm cable length



M12 connector, Y-shaped, for series connections without cable
Polyurethane connector body.
Protection degree IP67.
Gold-plated contacts.
Anti-vibration self-locking ring nut.

Article	Description
VF CY203P0	M12 connector, Y-shaped, for series connections without cable


M23 connectors



M23 male connectors for panel mounting

Protection degrees IP67 and IP69K.
M20x1.5 thread on the device side.
Gold-plated contacts.

Article	Description
VF CNM12MT-L10	M23 connector, 12-pole, length 10 cm
VF CNM12MT-L16	M23 connector, 12-pole, length 16 cm
VF CNM19MT-L10	M23 connector, 19-pole, length 10 cm
VF CNM19MT-L16	M23 connector, 19-pole, length 16 cm



M23 female connectors for panel mounting

Protection degrees IP67 and IP69K.
M20x1.5 thread on the device side.
Gold-plated contacts.

Article	Description
VF CPM12MT-L10	M23 connector, 12-pole, length 10 cm
VF CPM12MT-L20	M23 connector, 12-pole, length 20 cm
VF CPM19MT-L10	M23 connector, 19-pole, length 10 cm
VF CPM19MT-L20	M23 connector, 19-pole, length 20 cm



M23 female connectors with cable

Protection degrees IP67 and IP69K.
Gold-plated contacts.

Article	Description
VF CA12PD10S	M23 connector, 12-pole, length 10 m
VF CA12PD20S	M23 connector, 12-pole, length 20 m
VF CA12PD30S	M23 connector, 12-pole, length 30 m
VF CA19PD5S	M23 connector, 19-pole, length 5 m
VF CA19PD10S	M23 connector, 19-pole, length 10 m
VF CA19PD20S	M23 connector, 19-pole, length 20 m
VF CA19PD30S	M23 connector, 19-pole, length 30 m

Cable glands and adapters



Protection caps

Protection caps for threaded conduit entries.
Protection degree IP67.

Packs of **100 pcs.**

Article	Description
VF PTG13,5	Protection cap PG13.5
VF PTM20	Protection cap M20x1.5



Chock plugs

Chock plug for multipolar cables, threaded, M20x1.5.
Protection degree IP54.

Packs of **100 pcs.**

Article	Description
VF PFM20C8N	Chock plug for cables Ø 8 ... 12 mm, threaded, M20x1.5
VF PFM20C4N	Chock plug for cables Ø 4 ... 8 mm, threaded, M20x1.5



Strain relief cable glands

This particular design ensures high resistance to traction of the cable glands. All cable glands are also suitable for a wide range of cable diameters. Protection degree IP67.

Packs of **10 pcs.**

	Article	Description	Rubber shapes
Metric threads	VF PAM25C7N	M25x1.5, for 1 cable from Ø 10 ... 17 mm	○
	VF PAM20C6N	M20x1.5, for 1 cable from Ø 6 ... 12 mm	○
	VF PAM20C5N	M20x1.5, for 1 cable from Ø 5 ... 10 mm	○
	VF PAM20C3N	M20x1.5, for 1 cable from Ø 3 ... 7 mm	○
	VF PAM16C5N	M16x1.5, for 1 cable from Ø 5 ... 10 mm	○
	VF PAM16C4N	M16x1.5, for 1 cable from Ø 4 ... 8 mm	○
	VF PAM16C3N	M16x1.5, for 1 cable from Ø 3 ... 7 mm	○
	VF PAM20CBN	M20x1.5 for 2 cables Ø 3 ... 5 mm	⊕
	VF PAM20CDN	M20x1.5 for 3 cables Ø 1 ... 4 mm	⊕
	VF PAM20CEN	M20x1.5 for 3 cables Ø 3 ... 5 mm	⊕
	VF PAM20CFN	M20x1.5 for 4 cables Ø 1 ... 4 mm	⊕
	Threads PG	VF PAP13C6N	PG 13.5, for one cable from Ø 6 ... 12 mm
VF PAP13C5N		PG 13.5, for one cable from Ø 5 ... 10 mm	○
VF PAP13C3N		PG 13.5, for one cable from Ø 3 ... 7 mm	○
VF PAP11C5N		PG 11, for one cable from Ø 5 ... 10 mm	○
VF PAP11C4N		PG 11, for one cable from Ø 4 ... 8 mm	○
VF PAP11C3N		PG 11, for one cable from Ø 3 ... 7 mm	○



Thread adapters

Thread adapters make it possible to fulfil requests for switches with a different thread to those generally found in stock. This means it is possible to offer customers a single product type with various threaded connections, while only having to stock the product itself and many kinds of adapters.

Packs of **100 pcs.**

Article	Description
VF ADPG13-PG11	Adapter from PG 13.5 to PG 11
VF ADPG13-M20	Adapter from PG 13.5 to M20x1.5
VF ADPG13-1/2NPT	Adapter from PG 13.5 to 1/2 NPT
VF ADPG11-1/2NPT	Adapter from PG 11 to 1/2 NPT
VF ADPG11-PG13	Adapter from PG 11 to PG 13.5
VF ADM20-1/2NPT	Adapter from M20x1.5 to 1/2 NPT

Door holding magnets



NEW Holding magnets for use on machinery doors. The magnets are contained inside a sealed plastic cover and will not rust even in damp environments.

Article	Description
SM H9ZF	Door holding magnet (holding force 40 N)
SM H9ZQ	Door holding magnet (holding force 40 N, opposite polarity to SM H9ZF)

Coded screw covers for switches and actuators



NEW Coded screw covers are fitted via snap-on application to the openings of the fixing screws, making it impossible to access the screws and therefore disassemble the switch or actuator. The shells can only be removed by breaking them. Thus, any attempt to tamper with them will be immediately evident. By recording the data of the protective covers during final installation of the machine, e.g., by photographing the installed products, any replacements can be detected subsequently.

These new, coded protective covers can, therefore, also be used as a replacement for standard covers (should they be lost) without affecting the protection against tampering.

The covers are available for series SR, SM A, ST G, ST D, ST H, SM G, SM H, SM D, SM L, SM E, AN, NG (actuator), NS (housing), NS (actuator), NX.

Article	Description
VF PC10A9	Coded protective screw covers for series SR - SM A - ST G - NX
VF PC11A9	Coded protective screw covers for series ST D - ST H - SM G - SM H - SM D - SM L - SM E
VF PC12A9	Coded protective screw covers for the NG series (actuator)
VF PC13A9	Coded protective screw covers for the NS series (housing) - AN
VF PC14A9	Coded protective screw covers for the NS series (actuator)

Tampering protection for M12 connectors



Coded covers for M12 connectors

NEW These tampering protections are composed of two identical snap-on shells. They are applied to the device connectors, thereby making them inaccessible. The shells can only be removed by breaking them. Thus, any attempt to tamper with them will be immediately evident.

The coding has the same properties as the screw covers described above, thereby guaranteeing tens of thousands of different combinations.

Packs of **10 pcs.**

Article	Description
VF PC21A9	Coded protective covers for M12 connectors integrated in the device
VF PC22A9	Coded protective covers for M12 extension cables
VF PC21B6	Coded protective covers for M12 connectors integrated in the device
VF PC22B6	Coded protective covers for M12 extension cables

LED signalling lights



Signalling lights


These LED signalling lights are used for signalling that an electric contact has changed its state inside the switch. They can be installed on switches by screwing them on one of the conduit entries not used for electric cables.

- Protection degrees IP67 and IP69K
- Ambient temperature: -25°C ... +70°C
- Push-in type spring-operated connection system
- Body with M20x1.5 thread

Packs of **5 pcs.**

Article	Description
VF SL1A2PA1	White, 24 Vac/dc
VF SL1A3PA1	Red, 24 Vac/dc
VF SL1A4PA1	Green, 24 Vac/dc
VF SL1A5PA1	Yellow, 24 Vac/dc

Fixing screws




Torx safety screws

Pan head screws with Torx fitting and pin, stainless steel. Use a thread locker where required for applications acc. to EN ISO 14119.

Packs of **10 pcs.**

Article	Description
VF VAM4X10BX-X	M4x10 screw, with Torx T20 fitting, AISI 304
VF VAM4X15BX-X	M4x15 screw, with Torx T20 fitting, AISI 304
VF VAM4X20BX-X	M4x20 screw, with Torx T20 fitting, AISI 304
VF VAM4X25BX-X	M4x25 screw, with Torx T20 fitting, AISI 304
VF VAM4X30BX-X	M4x30 screw, with Torx T20 fitting, AISI 304
VF VAM5X10BX-X	M5x10 screw, with Torx T25 fitting, AISI 304
VF VAM5X15BX-X	M5x15 screw, with Torx T25 fitting, AISI 304
VF VAM5X20BX-X	M5x20 screw, with Torx T25 fitting, AISI 304
VF VAM5X25BX-X	M5x25 screw, with Torx T25 fitting, AISI 304
VF VAM5X35BX-X	M5x35 screw, with Torx T25 fitting, AISI 304
VF VAM5X45BX-X	M5x45 screw, with Torx T25 fitting, AISI 304



Bits for Torx safety screws

Bits for safety screws, with 1/4" connection.

Article	Description
VF VAIT1T20	Bits for M4 screws with Torx T20 fitting with safety pin
VF VAIT1T25	Bits for M5 screws with Torx T25 fitting with safety pin
VF VAIT1T30	Bits for M6 screws with Torx T30 fitting with safety pin



OneWay safety screws

Pan head screws with OneWay fitting in stainless steel. This screw type cannot be removed or tampered with using common tools. Ideal for fixing safety device actuators in accordance with EN ISO 14119.


Packs of **10 pcs.**

Article	Description
VF VAM4X10BW-X	M4x10 screw, with OneWay fitting, AISI 304
VF VAM4X15BW-X	M4x15 screw, with OneWay fitting, AISI 304
VF VAM4X20BW-X	M4x20 screw, with OneWay fitting, AISI 304
VF VAM4X25BW-X	M4x25 screw, with OneWay fitting, AISI 304
VF VAM5X10BW-X	M5x10 screw, with OneWay fitting, AISI 304
VF VAM5X15BW-X	M5x15 screw, with OneWay fitting, AISI 304
VF VAM5X20BW-X	M5x20 screw, with OneWay fitting, AISI 304
VF VAM5X25BW-X	M5x25 screw, with OneWay fitting, AISI 304

Lenses for VN NG-AC•• series buttons



Lenses without engraving				
Article	Description	Colours	Pieces/package	
VN NG-AC01	Lens for flush button, black, without engraving	●	10	
VN NG-AC02	Lens for flush button, white, without engraving	○	10	
VN NG-AC03	Lens for flush button, red, without engraving	●	10	
VN NG-AC04	Lens for flush button, green, without engraving	●	10	
VN NG-AC05	Lens for flush button, yellow, without engraving	●	10	
VN NG-AC06	Lens for flush button, blue, without engraving	●	10	
VN NG-ACA0	6 lenses for flush button without engraving, colours: black, white, red, green, yellow and blue	● ○ ● ● ● ●	1	

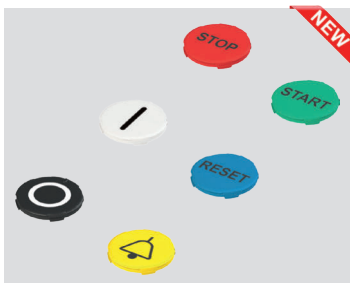

Lenses with engraving				
Article	Description	Colours	Pieces/package	
VN NG-AC01-●●●●	Lens for flush button, black, with engraving	●	1	
VN NG-AC02-●●●●	Lens for flush button, white, with engraving	○	1	
VN NG-AC03-●●●●	Lens for flush button, red, with engraving	●	1	
VN NG-AC04-●●●●	Lens for flush button, green, with engraving	●	1	
VN NG-AC05-●●●●	Lens for flush button, yellow, with engraving	●	1	
VN NG-AC06-●●●●	Lens for flush button, blue, with engraving	●	1	

The black lens cannot be used with illuminated buttons.

For ordering engraved lenses for buttons: replace the dots ●●●● in the article codes with the engraving code reported in the chapter Accessories on page 77. Example: white lens for flush button with "O" engraving. VN NG-AC02-●●●● → VN NG-AC02-L1

List of available engravings

Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol
L1		L17		L142		L87		L527		L10		L294	
L287		L44		L54		L76		L382		L18		L313	
L413		L45		L56		L187		L566		L143		L314	
L2		L46		L57		L77		L383		L24		L227	
L3		L60		L55		L78		L384		L310		L228	
L4		L191		L146		L190		L385		L25		L316	
L35		L193		L293		L416		L386		L30		L394	
L36		L308		L304		L417		L395		L31		L399	
L37		L61		L305		L189		L411		L58		L436	
L11		L153		L470		L230		L414		L75		L437	
L12		L194		L317		L249		L415		L425		L438	
L412		L309		L319		L376		L418		L454		L439	
L188		L408		L330		L102		L419		L83		L440	
L14		L145		L455		L103		L420		L84		L441	
L32		L336		L456		L139		L80		L90		L295	
L33		L96		L369		L140		L374		L91		L668	
L34		L27		L426		L141		L476		L311		L689	
L240		L147		L59		L157		L472		L312		L234	
L16		L148		L64		L381		L473		L442		L235	
L41		L162		L62		L445		L474		L443		L236	
L42		L172		L63		L278		L475		L170		L237	
L43		L220		L86		L323		L7		L174		L238	
L213		L277		L88		L362		L8		L175		L239	
L254		L226		L89		L380		L9		L176		L241	

Other engravings on request

Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol
L242		L460		L516	C	L407	P	L73	9	L617	START ENABLE	L536	SBLOCCO TESTA
L243		L485		L517	D	L575	P-1	L74	0	L250	POWER	L537	INS. AUX
L244		L486		L530	E	L576	P0	L450	-1	L132	TACITAZIONE SIRENA	L538	INS. TESTA
L245		L494		L518	F	L577	P1	L451	-2	L167	RETE	L549	ACCESS
L246		L504		L519	G	L578	P2	L547	X+	L168	TERMICO	L561	BIMANUAL
L247		L505		L698	H	L579	P3	L548	X-	L169	MARCIA	L564	VALID
L248		L506		L699	I	L580	P4	L206	×	L173	RAPID SCHNELL	L582	STAND-BY PUMPS
L251		L512		L700	J	L15	R	L208	⊗	L224	ACCESS REQUEST	L591	LOCK UNLOCK
L253		L528		L453	K	L40	⚡	L716	Y+	L225	ACCESS RESET	L600	REV
L260		L529		L701	L	L38	⚡	L717	Y-	L231	ZONE	L602	HOLD
L279		L539		L702	M	L39	⚡	L205	Y+	L233	CAUTION	L605	QUIT
L280		L543		L703	N	L520	Z1	L207	-λ	L265	FERMETURE	L607	REARMAR
L393		L562		L704	O	L521	Z2	L718	Z+	L268	OIL TANK	L618	REQUEST ENTRY
L389		L596		L705	P	L597	EI	L719	Z-	L299	BÜNDIG	L619	FAULT RESET
L390		L609		L706	Q	L598	ES	L262	← 0 →	L361	CABINE A NIVEAU	L620	RECIPE 1
L391		L612		L707	R	L599	IT	L573	RUN	L370	UNLOCK DOOR	L621	RECIPE 2
L392		L613		L708	S	L65	1	L574	STOP	L371	REQUEST / RESET ACCESS TO AREA	L622	RECIPE 3
L463		L614		L709	T	L66	2	L215	INIT	L378	SICHER	L623	RECIPE 4
L464		L615		L710	U	L67	3	L276	START STOP	L379	UNSICHER	L624	RECIPE 5
L465		L651		L711	V	L68	4	L603	CYCLE START	L396	MAN	L625	RECIPE 6
L466		L667		L712	W	L69	5	L333	NS. TESTA CYCLE STOP	L433	SERVOS ON	L627	SEND
L467		L673		L713	X	L70	6	L583	STOP AUTO	L477	ALARM	L628	FADE
L468		L514	A	L714	Y	L71	7	L581	START AUTO	L489	OK	L629	FLASH 1Hz
L375		L515	B	L715	Z	L72	8	L410	PAUSE (START)	L513	ACCÈS	L630	FLASH 2Hz

Other engravings on request

Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol
L631	LOW HIGH	L720	RESET LIGHT CURTAINS	L48	STOP	L130	100%	L292	MONO / TRI	L121	SCATTO TERMICO	L104	24V 电源指示 24V Power
L632	ON	L721	ABORT	L49	STOP	L315	24V=	L327	ENABLE DISABLE	L122	CIRCUIT BREAKER	L105	220V 电源指示 220V Power
L650	READY	L461	LIGA	L113	STOP	L82	EROUND	L222	ACCESS DENIED	L123	MAN. - AUT.	L106	选择开关 Selector
L677	HOME	L421	Viceméné	L29	START	L199	SPEED	L223	ACCESS ALLOWED	L124	START CICLO	L107	启动按钮 START
L678	PINZA	L197	R	L53	START	L332	ALLOW IN	L216	C / C	L125	RADDRIZZATORE 0-1	L108	停止按钮 STOP
L679	DELETE	L201	HEAD RETRACT	L51	START	L334	SYSTEM START	L117	POMPA FILTRO 0-1	L126	STOP CICLO	L109	电源指示 Power
L680	SAVE	L209	HEAD UP	L129	3/4	L335	SYSTEM STOP	L118	FILTER PUMP 0-1	L127	BY-PASS EMERGENZE 0-1	L110	合闸指示 Ready
L686	GRIPPER	L28	STOP	L114	RESET	L281	DEFAULT	L119	RISCALDAMENTO 0-1	L131	AZIONAMENTO 0-1	L111	故障指示 Stoppage
L687	TOE PRESS	L50	STOP	L306	RESET	L289	BOOST	L120	HEATING 0-1	L135	AVANTI - INDIETRO		

Other engravings on request


List of available engravings – TEXTS

Code	Text	Code	Text	Code	Text
IT0	ARRESTO	GB12	MAN. 0 AUTO	FR10	ARRÊT MARCHE
IT1	AVVIO	GB14	RESET	FR11	MAN. AUTO
IT2	CHIUSO	GB15	FORWARD	FR12	MAN. 0 AUTO
IT3	SU	GB16	REVERSE	FR14	REARM.
IT4	GIÙ	GB17	RAISE	FR15	AVANT
IT5	SPENTO	GB18	LOWER	FR16	ARRIÈRE
IT6	ACCESO	GB19	LEFT	FR17	MONTER
IT7	IN SERVIZIO	GB20	RIGHT	FR18	DESCENDRE
IT8	ERRORE	GB21	BRAKE	FR19	GAUCHE
IT9	TEST	GB22	HIGH	FR20	DROITE
IT13	MARCIA	GB23	LOW	FR21	FERMER/OUVRIR
IT14	RIAVVIA	GB24	FAST	FR32	OUVRIR
IT15	AVANTI	GB25	SLOW	FR54	BROCHAGE
IT16	INDIETRO	GB26	FASTER	FR55	ALARME
IT17	AUMENTA	GB27	SLOWER	FR60	OUVRIR/FERMER
IT18	DIMINUISCI	GB32	OPEN	FR63	APPEL
IT19	SINISTRA	GB49	MANUAL	FR64	OCCUPÉ
IT20	DESTRA	GB50	REMOTE	FR68	SOUS TENSION
IT21	FRENO	GB51	LINE	FR77	DÉFAUT
IT22	ALTO	GB58	DIVE	FR99	ARRÊT D'URGENCE
IT23	BASSO	GB59	SURFACE	DE0	HALT
IT24	VELOCE	GB63	CALL	DE3	AUF
IT25	LENTO	GB64	OCCUPIED	DE4	AB
IT26	PIÙ VELOCE	GB65	BYPASS 0 1	DE5	AUS
IT27	PIÙ LENTO	GB66	BYPASS UP	DE7	BETRIEB
IT32	APRIRE	GB67	ENABLE SWITCH	DE8	STÖRUNG
IT47	APRE	GB69	TEACH	DE14	ENTSPERREN
IT48	CHIUDE	GB70	STOCK	DE24	SCHNELL
IT51	LINEA	GB71	STAR	DE31	TIPPEN
IT52	SALITA	GB72	OVERLOAD	DE32	ÖFFNEN
IT53	DISCESA	GB73	REQUEST	DE64	BESETZT
IT63	CHIAMATA	GB76	AUTO	DE99	NOT-AUS
IT64	OCCUPATO	GB78	RESERVE	ES3	SUBIR
IT68	RIPRISTINO	GB79	DOOR	ES4	BAJAR
IT74	EMERGENZA	GB80	UNLOCK	ES8	FALLO
IT99	ARRESTO D'EMERGENZA	GB81	DOOR UNLOCK	ES15	AVANCE
GB0	STOP	GB82	LOCK	ES32	ABRIR
GB1	START	GB99	EMERGENCY STOP	ES56	MARCHA
GB2	CLOSE	FR0	ARRÊT	ES57	PARO
GB3	UP	FR1	MARCHE	DK3	OP
GB4	DOWN	FR2	FERMÉ	DK4	NED
GB5	OFF	FR3	MONTÉE		
GB6	ON	FR4	DESCENTE		
GB7	RUN	FR5	ARRÊT		
GB8	FAULT	FR6	MARCHE		
GB9	TEST	FR7	EN SERVICE		
GB10	OFF ON	FR8	PANNE		
GB11	MAN. AUTO	FR9	ESSAI		

Other engravings on request

List of available engravings only for VE/TF series labels

Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol	Code	Symbol
L19	0	L217	CLOSE OPEN	L255	OUVERTURE GAUCHE	L352	STOP2	L642	DEF.FIL.
L20	0	L97	COALESCING FABRIC	L256	OUVERTURE DROITE	L353	STOP3	L643	KL-0-KLI
L21	0	L98	EDGE TESTING	L257	FERMETURE DROITE	L354	STOP4	L644	SCIE
L22	0	L99	HORIZONTAL TESTING	L258	FERMETURE GAUCHE	L355	START1	L647	
L219	o —	L100	HORIZONTAL TESTING	L264	OUVERTURE	L356	START2	L648	
L185	1 2 3	L101	INDICATION LIGHT OF HEAT TREATMENT	L265	FERMETURE	L357	START3	L654	BIND.1
L259	1 2 3 4	L116	Aterställning Låg topp/grop	L282	NIVEAU HAUT	L358	START4	L655	BIND.2
L452	STOP START	L133	CARTON/PLASTIQUE	L283	NIVEAU BAS	L479	JOG	L656	CUT. UNIT
L156	↑ ↓	L134	AUTO/BROCHAGE	L284	PRÉSENCE FLAMME	L480	OPEN CLOSE	L657	FAULT LINK
L262	← 0 →	L138	FIN DE BALLE	L285	DÉFAUT FLAMME	L487	APRI CHIUDI	L658	FAULT SAFETY
L155	AUTO 0 MAN.	L149	MONTÉE DROITE	L286	ACQUIT DÉFAUT	L490		L659	POWER ON
L164	AUTO. MAN.	L150	MONTÉE GAUCHE	L288	ÉVACUATION DES FUMÉES	L491		L660	RETARD
L377	AUTOMATIC 0 1	L151	DESCENTE DROITE	L339	R	L513	ACCÈS	L661	TIME DELAY
L342	MAN OFF AUTO	L152	DESCENTE GAUCHE	L340	S	L530	E	L666	
L266	AUTO-0-MAIN	L177	ENABLE 1	L341	T	L540	PARKERING	L682	ON OFF ON
L359	START AUTO	L178	ENABLE 2	L343	RUN 1	L541	OP NED	L684	
L360	STOP AUTO	L179	ENABLE 3	L344	RUN 2	L542	LIFT HERTIL PARKE RING	L685	
L163	SLOW FAST	L180	ENABLE 4	L345	RUN 3	L555	OIL IN	L690	SLOW STD FAST
L404	 	L181	ENABLE 5	L346	RUN 4	L556	OIL OUT	L691	SUBIR - BAJAR
L171	HIGH LOW	L182	ENABLE 6	L347	EMER1	L567	HERTIL	L692	AVANCE RETRO CESO
L232	R 0 F	L183	ENABLE 7	L348	EMER2	L638	BOT.1	L7120	
L307	FWD 0 REV	L184	ENABLE 8	L349	EMER3	L639	BOT.2		
L469	FWD REV	L186	NOUEUR	L350	EMER4	L640	CONV.		
L144	BARRIER BY-PASS & RESET 0 1	L221	SPARE	L351	STOP1	L641	DEF.SECU		




Example of 3-position selector with VE TF••H••••• label and L21 engraving.

Other engravings on request




General Catalogue
Detection




General Catalogue
HMI



General Catalogue
Safety
Devices



General Catalogue
- PLCs & Safety
Modules



General Catalogue
Lift



Website
www.pizzato.com



PASSION FOR QUALITY

Pizzato Elettrica s.r.l. via Torino, 1 - 36063 Marostica (VI) Italy

Phone: +39 0424 470 930

E-mail: info@pizzato.com

Website: www.pizzato.com

Any information or application example, connection diagrams included, described in this document are to be intended as purely descriptive. The choice and application of the products in conformity with the standards, in order to avoid damage to persons or goods, is the user's responsibility. The drawings and data contained in this document are not binding and we reserve the right, in order to improve the quality of our products, to modify them at any time without prior notice. All rights to the contents of this publication are reserved in accordance with current legislation on the protection of intellectual property. The reproduction, publication, distribution and modification, total or partial, of all or part of the original material contained therein (including, but not limited to, texts, images, graphics), whether on paper or in electronic form, are expressly prohibited without written permission from Pizzato Elettrica Srl. All rights reserved. © 2025 Copyright Pizzato Elettrica.

ZE PRG16A25-ENG



8 018851 687112